



EMP214-P1

UPDATED 02/08/2005


12.50 – 15.50 GHz Power Amplifier MMIC

FEATURES

- 12.5 – 15.5 GHz Operating Frequency Range
- 29.0dBm Output Power at 1dB Compression
- 15.0 dB Typical Small Signal Gain
- -40dBc OIMD3 @Each Tone Pout 19dBm

APPLICATIONS

- Point-to-point and point-to-multipoint radio
- Military Radar Systems

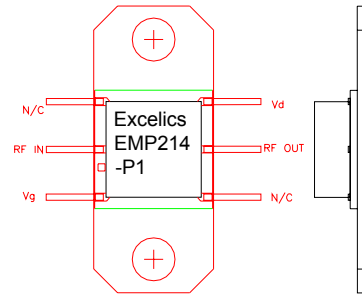

Optional Packaging solutions are available
contact the Excelics sales team for details.



Caution! ESD sensitive device.

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$, 50 ohm, VDD=7V, IDQ=800mA)

SYMBOL	PARAMETER/TEST CONDITIONS		MIN	TYP	MAX	UNITS
F	Operating Frequency Range	EMP214	12.5		15.5	GHz
		EMP214H	13.5		15.5	
		EMP214L	12.5		14.5	
P1dB	Output Power at 1dB Gain Compression		27.5	29.0		dBm
Gss	Small Signal Gain		12.0	15.0		dB
OIMD3	Output 3 rd Order Intermodulation Distortion @ $\Delta f=10\text{MHz}$, Each Tone Pout 19dBm			-40	-37	dBc
Input RL	Input Return Loss			-15	-10	dB
Output RL	Output Return Loss			-15	-10	dB
Idss	Saturate Drain Current	$V_{DS}=3\text{V}$, $V_{GS}=0\text{V}$	990	1238	1486	mA
VDD	Power Supply Voltage			7	8	V
Rth	Thermal Resistance (Au-Sn Eutectic Attach)			7.5		$^\circ\text{C/W}$
Tb	Operating Base Plate Temperature		-35		+85	$^\circ\text{C}$

ABSOLUTE MAXIMUM RATINGS FOR CONTINUOUS OPERATION^{1,2}

SYMBOL	CHARACTERISTIC	VALUE
V_{DS}	Drain to Source Voltage	8 V
V_{GS}	Gate to Source Voltage	-4 V
I_{DD}	Drain Current	Idss
I_{GSF}	Forward Gate Current	15mA
P_{IN}	Input Power	@ 3dB compression
T_{CH}	Channel Temperature	150 $^\circ\text{C}$
T_{STG}	Storage Temperature	-65/150 $^\circ\text{C}$
P_T	Total Power Dissipation	15.8W

1. Operating the device beyond any of the above rating may result in permanent damage.

2. Bias conditions must also satisfy the fol

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085

Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com


page 1 of 2

Revised February 2005



12.50 – 15.50 GHz Power Amplifier MMIC

Package Outline

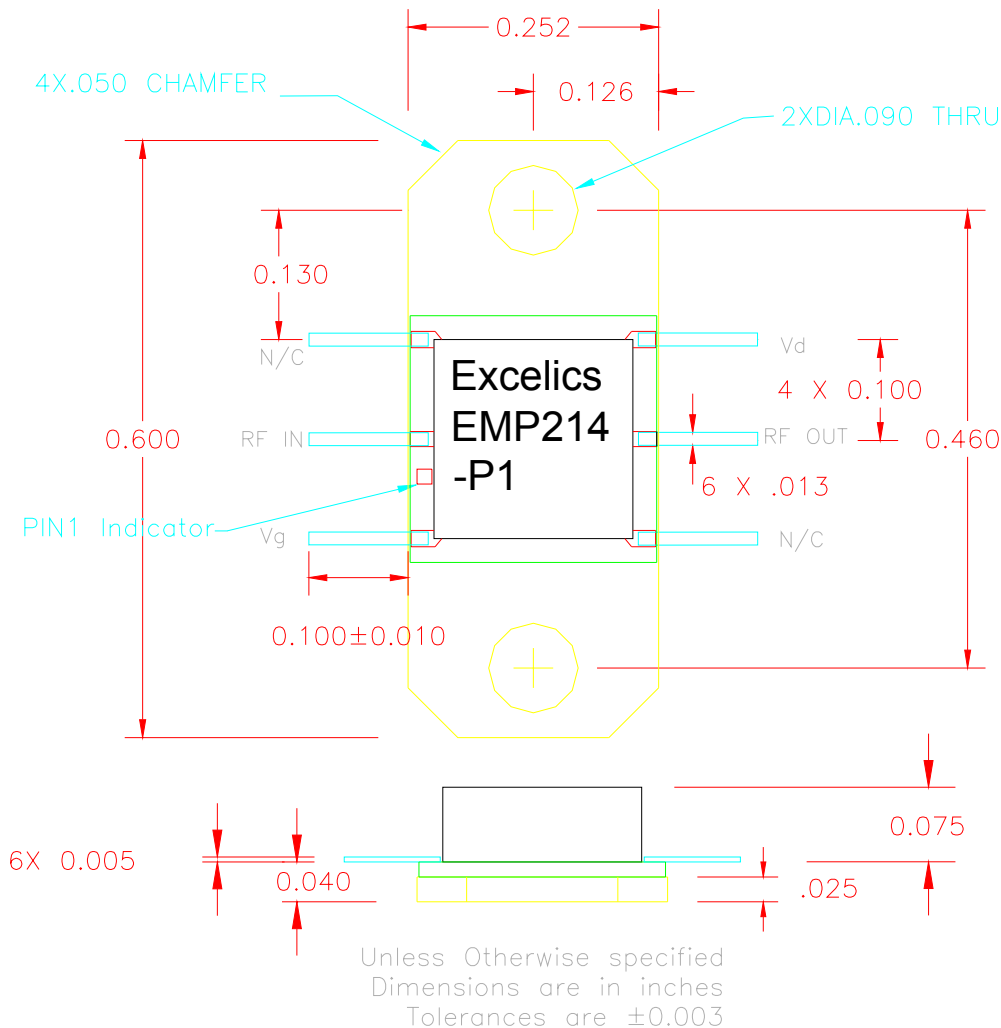

Ordering Information

Part Number	Frequency (GHz)
EMP214-P1	12.50-15.50 GHz
EMP214H-P1	13.50-15.50 GHz
EMP214L-P1	12.50-14.50 GHz

Notes: Contact factory for military and hi-rel grades.