

Dual N-channel MOSFET (common drain)

ELM18816BA-S

General description

ELM18816BA-S uses advanced trench technology to provide excellent $R_{ds(on)}$ and low gate charge.

Features

- $V_{ds}=30V$
- $I_d=8A$ ($V_{gs}=10V$)
- $R_{ds(on)} < 15m\Omega$ ($V_{gs}=10V$)
- $R_{ds(on)} < 17m\Omega$ ($V_{gs}=4.5V$)
- $R_{ds(on)} < 23m\Omega$ ($V_{gs}=2.5V$)


Maximum absolute ratings

Parameter		Symbol	Limit	Unit	Note
Drain-source voltage		V_{ds}	30	V	
Gate-source voltage		V_{gs}	± 12	V	
Continuous drain current	$T_a=25^{\circ}C$	I_d	8	A	1
	$T_a=70^{\circ}C$		6		
Pulsed drain current		I_{dm}	30	A	2
Power dissipation	$T_a=25^{\circ}C$	P_d	1.5	W	1
	$T_a=70^{\circ}C$		1.0		
Junction and storage temperature range		T_j, T_{stg}	-55 to 150	$^{\circ}C$	

Thermal characteristics


Parameter		Symbol	Typ.	Max.	Unit	Note
Maximum junction-to-ambient	$t \leq 10s$	$R\theta_{ja}$	64	83	$^{\circ}C/W$	1
Maximum junction-to-ambient	Steady-state		89	120	$^{\circ}C/W$	
Maximum junction-to-lead	Steady-state	$R\theta_{jl}$	53	70	$^{\circ}C/W$	3

Pin configuration



Pin No.	Pin name
1	DRAIN1/DRAIN2
2	SOURCE1
3	SOURCE1
4	GATE1
5	GATE2
6	SOURCE2
7	SOURCE2
8	DRAIN1/DRAIN2

Circuit



Dual N-channel MOSFET (common drain)

ELM18816BA-S

Electrical characteristics

Ta=25°C

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
STATIC PARAMETERS						
Drain-source breakdown voltage	BV _{dss}	I _d =250 μ A, V _{gs} =0V	30			V
Zero gate voltage drain current	I _{dss}	V _{ds} =24V V _{gs} =0V			1	μ A
		T _j =55°C			5	
Gate-body leakage current	I _{gss}	V _{ds} =0V, V _{gs} = $\pm$ 12V			$\pm$ 100	nA
Gate threshold voltage	V _{gs(th)}	V _{ds} =V _{gs} , I _d =250 μ A	0.6	1.0	1.4	V
On state drain current	I _{d(on)}	V _{gs} =4.5V, V _{ds} =5V	30			A
Static drain-source on-resistance	R _{ds(on)}	V _{gs} =10V I _d =8A		12.2	15.0	m Ω
		T _j =125°C		17.0	21.0	
		V _{gs} =4.5V, I _d =5A		13.0	17.0	m Ω
		V _{gs} =2.5V, I _d =4A		17.6	23.0	m Ω
Forward transconductance	G _{fs}	V _{ds} =5V, I _d =8A		23		S
Diode forward voltage	V _{sd}	I _s =1A, V _{gs} =0V		0.73	1.00	V
Max. body-diode continuous current	I _s				2.5	A
DYNAMIC PARAMETERS						
Input capacitance	C _{iss}	V _{gs} =0V, V _{ds} =15V, f=1MHz		1130		pF
Output capacitance	C _{oss}			170		pF
Reverse transfer capacitance	C _{rss}			125		pF
Gate resistance	R _g	V _{gs} =0V, V _{ds} =0V, f=1MHz		1.5		Ω
SWITCHING PARAMETERS						
Total gate charge	Q _g	V _{gs} =4.5V, V _{ds} =15V, I _d =8A		14.00		nC
Gate-source charge	Q _{gs}			1.65		nC
Gate-drain charge	Q _{gd}			5.50		nC
Turn-on delay time	t _{d(on)}	V _{gs} =5V, V _{ds} =15V R _L =1.8 Ω , R _{gen} =3 Ω		5.7		ns
Turn-on rise time	t _r			4.8		ns
Turn-off delay time	t _{d(off)}			36.0		ns
Turn-off fall time	t _f			7.0		ns
Body diode reverse recovery time	t _{rr}	I _F =8A, dI/dt=100A/ μ s		23		ns
Body diode reverse recovery charge	Q _{rr}	I _F =8A, dI/dt=100A/ μ s		16		nC

NOTE :

1. The value of R θ _{ja} is measured with the device mounted on 1in² FR-4 board of 2oz. Copper, in still air environment with Ta=25°C. The value in any given applications depends on the user's specific board design. The current rating is based on the t $\leq$ 10s thermal resistance rating.
2. Repetitive rating, pulse width limited by junction temperature.
3. The R θ _{ja} is the sum of the thermal impedance from junction to lead R θ _{jl} and lead to ambient.
4. The static characteristics in Figures 1 to 6 are obtained using 80 μ s pulses, duty cycle 0.5%max.
5. These tests are performed with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with Ta=25°C. The SOA curve provides a single pulse rating.

Dual N-channel MOSFET (common drain)

ELM18816BA-S

Typical electrical and thermal characteristics

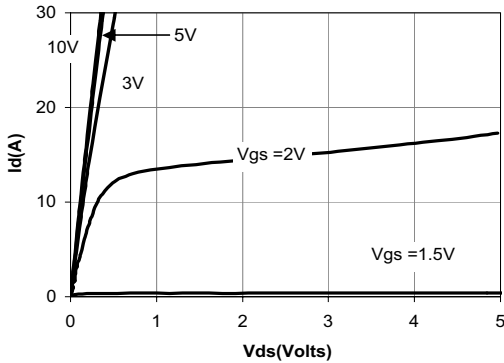


Figure 1: On-Regions Characteristics

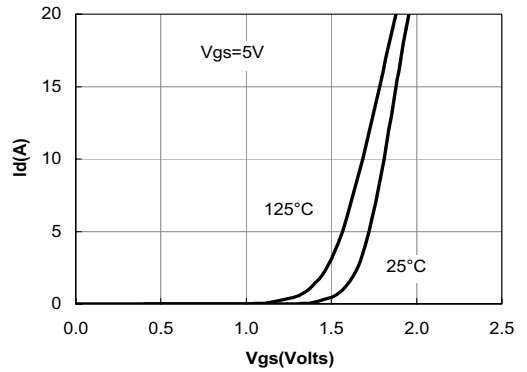


Figure 2: Transfer Characteristics

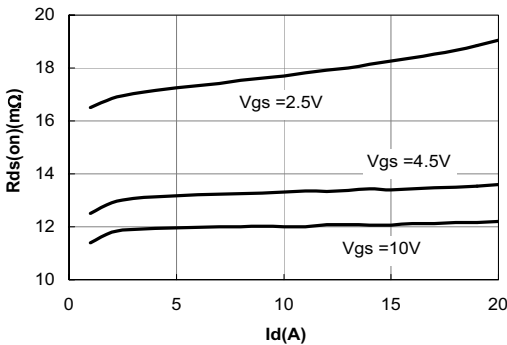


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

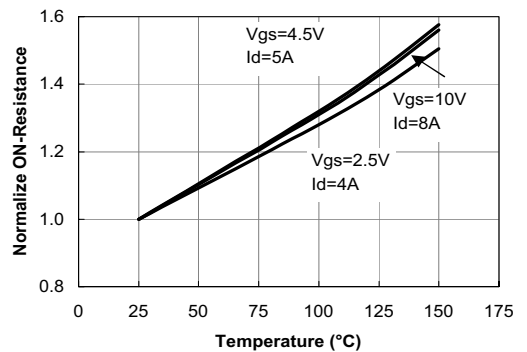


Figure 4: On-Resistance vs. Junction Temperature

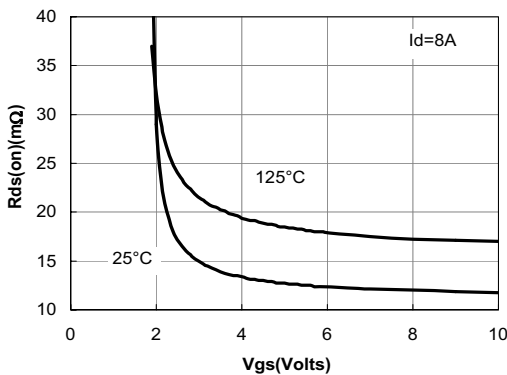


Figure 5: On-Resistance vs. Gate-Source Voltage

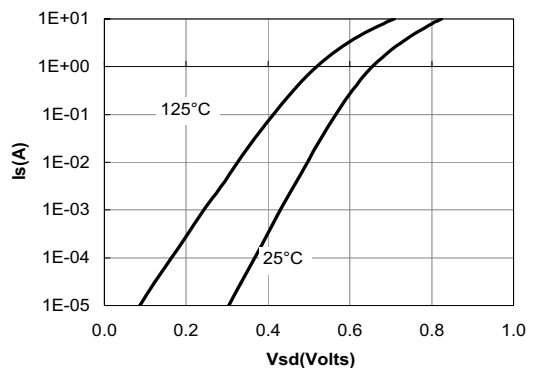


Figure 6: Body-Diode Characteristics

Dual N-channel MOSFET (common drain)

ELM18816BA-S

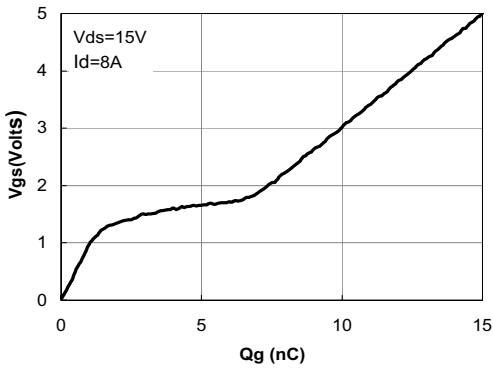


Figure 7: Gate-Charge Characteristics

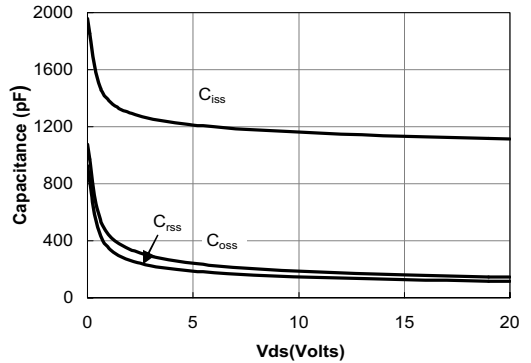


Figure 8: Capacitance Characteristics

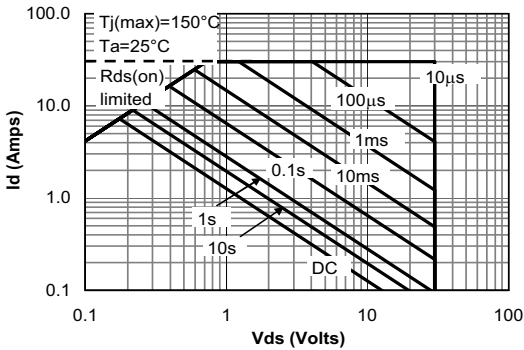


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

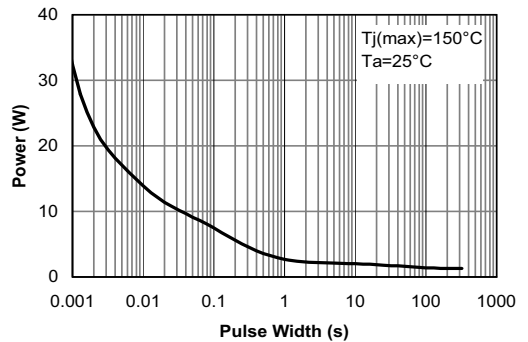


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

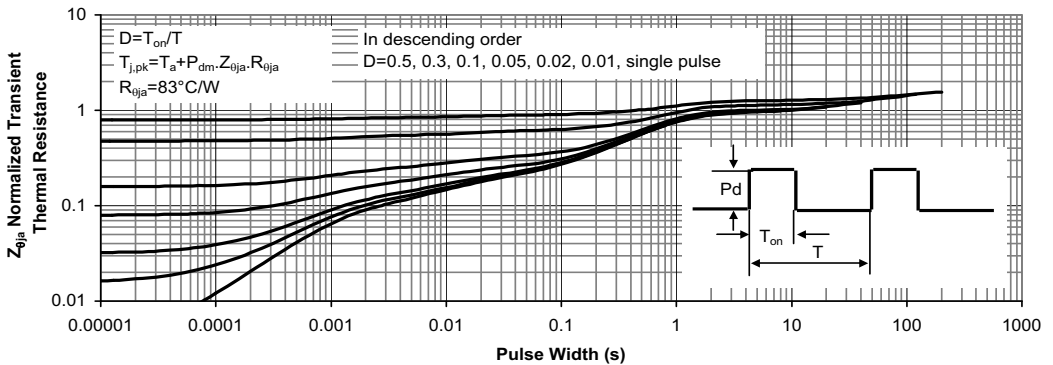


Figure 11: Normalized Maximum Transient Thermal Impedance