

ELLS-405YWA


Page 1 of 2



The ELLS-405 series is a large 10.00 mm (0.39") high seven segment display designed for viewing distances up to 7 meters.



RoHS Compliant
Aug 2004

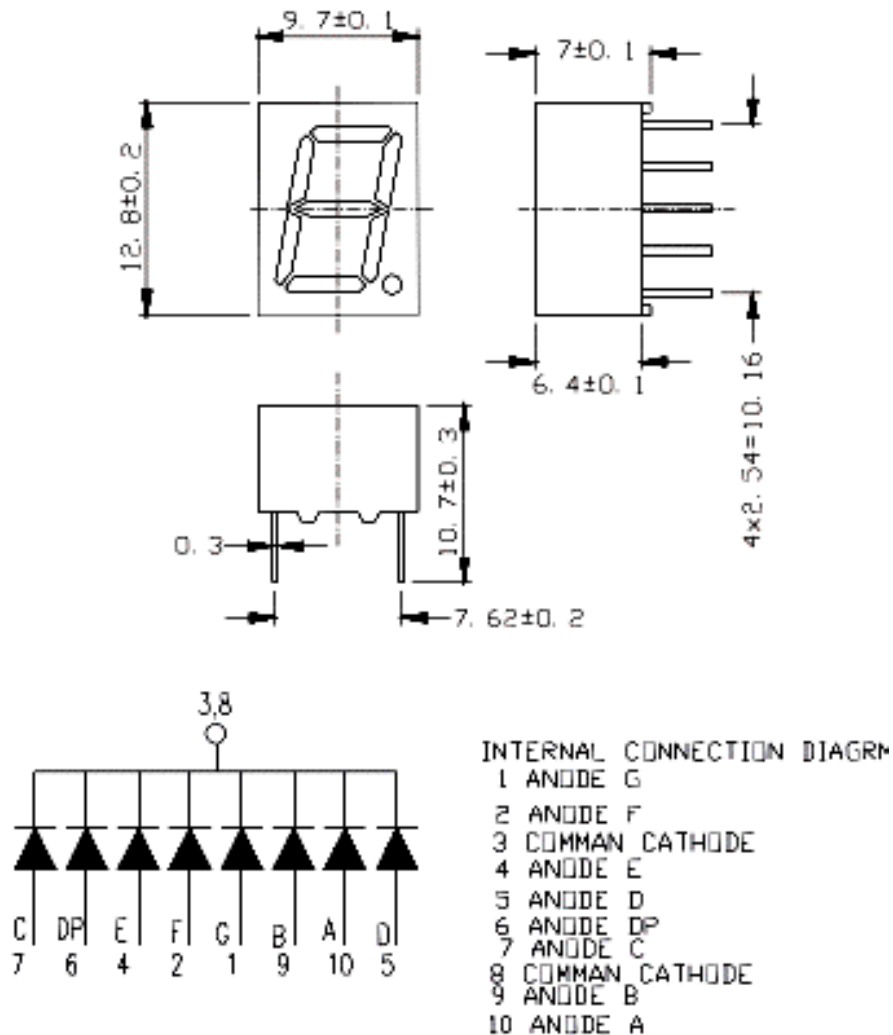

PART NO.	Chip		Face Color
	Material	Emitted Color	
ELLS-405YWA	GaAsP/GaP	Yellow	Gray

* Specifications subject to change without notice. Dimensions are in mm ± 0.25 unless stated otherwise.

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Units
Forward Current	I_F	15	mA
Operating Temperature	T_{opr}	-40 to +85	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +100	$^\circ\text{C}$
Soldering Temperature	T_{sol}	260 (for ≤ 5 sec)	$^\circ\text{C}$
Power Dissipation	P_d	40	mW
Pulse Forward Current (Pulse Width ≤ 10 msec and Duty $\leq 1/10$)	I_{FP}	70	mA
Reverse Voltage	V_R	5	V

Electronic Optical Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Units	Condition
Luminous Intensity	Per segment	I_v	0.18	0.90	—	mcd	$I_F = 10$ mA
	Per decimal point		—	—	—		
Peak Wavelength		λ_p	—	585	—	nm	$I_F = 20$ mA
Dominant Wavelength		λ_d	—	590	—	nm	$I_F = 20$ mA
Spectrum Radiation Bandwidth		$\Delta\lambda$	—	35	—	nm	$I_F = 20$ mA
Forward Voltage		V_F	—	3.0	—	V	$I_F = 20$ mA
Reverse Current		I_R	—		10	μA	$V_R = 5$ V

* Specifications subject to change without notice. Dimensions are in mm ± 0.25 unless stated otherwise.