





• EFM-250




**FEATURES:**

- SMT inside
- Small size
- Sealed type for wave soldering and washable request
- Low current consumption

**DIMENSIONS: (Unit: mm)**

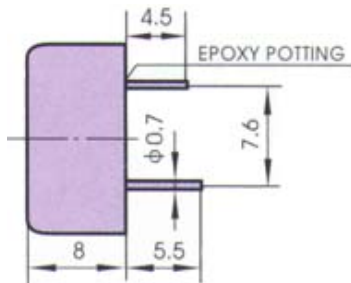

**CHARACTERISTICS:**

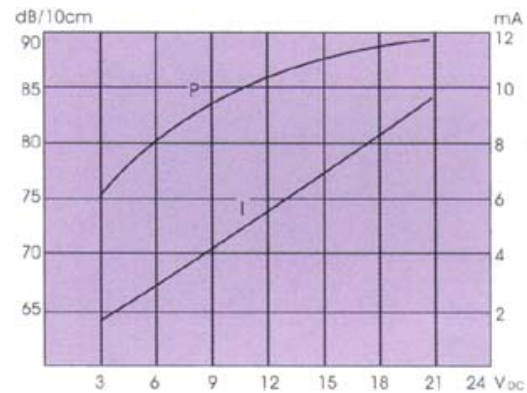

**Note:** EFM-250 is adopted with epoxy potting at the bottom.

**ELECTRICAL SPECIFICATIONS :**

| Model No.                            | EFM-250                     |
|--------------------------------------|-----------------------------|
| Min. Sound Pressure Level (dB)       | 85 /12V <sub>DC</sub> /10cm |
| Rated Voltage (V <sub>DC</sub> )     | 12                          |
| Operating Voltage (V <sub>DC</sub> ) | 6 ~ 16                      |
| Max. Consumption (mA)                | 8 /12V <sub>DC</sub>        |
| Oscillating Frequency (kHz)          | 4.0 ± 0.5                   |
| Tone Nature                          | Continuous                  |
| Operating Temperature (°C)           | -20 ~ +60                   |
| Weight (g)                           | 1.3                         |
| Case Material/Colour                 | PC/Black                    |

**PACKING INFORMATION :**

|               |                            |
|---------------|----------------------------|
| Packing :     | 5000 pcs per export carton |
| Carton Size : | 47 X 30.5 X 33 cm          |
| G. Weight :   | 8 kgs                      |
| N. Weight :   | 6.5 kgs                    |