


Sketch with main dimensions

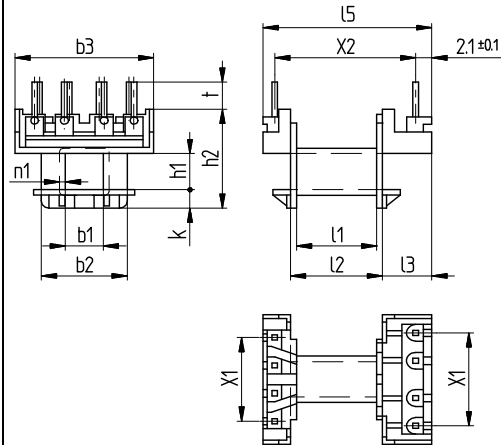


For applications with enlarged creepage distances.

Standard material: Ultramid A3X2G7, natural
Temp. Class B (130°C) UL 94-V0

Creepage distances:

- at long bobbin side = 14,50 mm
- at short bobbin side = 8,12 mm

ST
with molded-in wires □ 0,6 mm



b1 ± 0,1	b2 ± 0,1	b3 ± 0,2	h1 ± 0,1	h2 ± 0,2	k ± 0,1	l1 ± 0,1	l2 ± 0,2	l3 ± 0,2	l5 ± 0,2	n1 + 0,2	t ± 0,2	X1 ± 0,2	X2 ± 0,2	X3 ①	Type	Article- No.
4,9	11,0	17,7	4,9	13,5	2,5	10,2	11,2	6,3	21,0	0,6	3,7	3x3,81 1x5,08 2x3,81	17,78	2x4	EE 16/4,9/1 ST Wz 7927/1 ST	3774