

Photoelectrics Diffuse-reflective Types ED 5502/5506

CARLO GAVAZZI



- Range: 200 or 600 mm
- Adjustable sensitivity
- Modulated, infrared light
- Rated operational voltage: 10 to 30 VDC
- Output: DC 200 mA, NPN or PNP
- Make and break switching function, LED indication
- High immunity to ambient light
- Photoelectric, inductive and capacitive flat pack series in PC housing, IP 67
- Cable or M12 plug versions



Product Description

Diffuse-reflective photoelectric with sensing distance up to 600 mm. Easily adjustable sensitivity with 270° potentiometer. LED indication for output ON. Flat pack housing

size (W x H x D) 35 x 55 x 15 mm made in polycarbonate. Easy mounting with only two M3.5 screws. Ideal for use in conveying and material handling applications

Ordering Key

ED 55 06 NPA P-1

Type	
Housing	
Range	
Output type	
Housing material	
Connection type	

Type Selection

Housing diameter W x H x D	Rated operating dist. (S _n)	Ordering no. NPN/cable Make & break swit.	Ordering no. NPN/plug Make & break swit.	Ordering no. PNP/cable Make & break swit.	Ordering no. PNP/plug Make & break swit.
35 x 55 x 15	200 mm 600 mm	ED 5502 NPAP ED 5506 NPAP	ED 5502 NPAP-1 ED 5506 NPAP-1	ED 5502 PPAP ED 5506 PPAP	ED 5502 PPAP-1 ED 5506 PPAP-1

Specifications


Rated operating dist. (S_n)	ED 5502 Up to 200 mm ED 5506 Up to 600 mm Reference target: Kodak test card R27, white, 90% reflectivity 100 x 100 mm 200 x 200 mm	Protection Reverse polarity, short-circuit, transients
Adjustable range	ED 5502 50 to 200 mm ED 5506 150 to 600 mm	Transient voltage Max. 1 kV/0.5 J
Temperature drift	0.5%/°C	Sensitivity Adjustable, 270° turn potentiometer
Hysteresis (H) (Differential travel)	< 20%	Light source GaAlAs LED, 880 nm
Rated operational volt. (U_B)	10 to 30 VDC (ripple included)	Light type Infrared, modulated, synchronized
Ripple (U_{rp})	≤ 10%	Sensing angle ± 25° at 1/2 range
Output current	Continuous (I _a) ≤ 200 mA Short-time (I) 200 mA Max. load capacity 100 nF	Ambient light Max. 10,000 lux
No load supply current (I_o)	≤ 30 mA,	Operating frequency (f)
Min. load current (I_m)	0.5 mA	ED 5502 500 Hz, light/dark ratio 1:2
OFF-state current (I_i)	≤ 100 μA	ED 5506 100 Hz, light/dark ratio 1:2
Voltage drop (U_d)	≤ 2.5 V	Response time
		OFF-ON (t _{ON}) ED 5502 ≤ 0.67 ms ED 5506 ≤ 4 ms
		ON-OFF (t _{OFF}) ED 5502 ≤ 1.33 ms ED 5506 ≤ 6 ms
		Power ON delay (t_v) Typ. 100 ms
		Indication Output ON LED, yellow (indicates the present of a target or object)
		Environment Overvoltage category III (IEC 60664/664A; 60947-1) Pollution degree 3 (IEC 60664/664A; 60947-1) Degree of protection IP 67 (IEC 60529; 60947-1)



Specifications (cont.)

Temperature		Connection	
Operating	-20° to +60°C (-4° to +140°F)	Cable	Grey, 2 m, oilproof PVC, 4 x 0.34 mm²
Storage	-30° to +70°C (-22° to +158°F)	Note:	Other cable lengths on request
Vibration	10 to 150 Hz, 0.5 mm/7.5 g (IEC 60068-2-6)	Plug (-1)	M12, CONH1A-.. serie
Shock	2 x 1 m & 100 x 0.5 m (IEC 60068-2-32)	Weight	125 g cable version 40 g plug version
Dielectric voltage	500 VAC (rms)	CE-marking	Yes
Housing material	Polycarbonate, black		


Dimensions

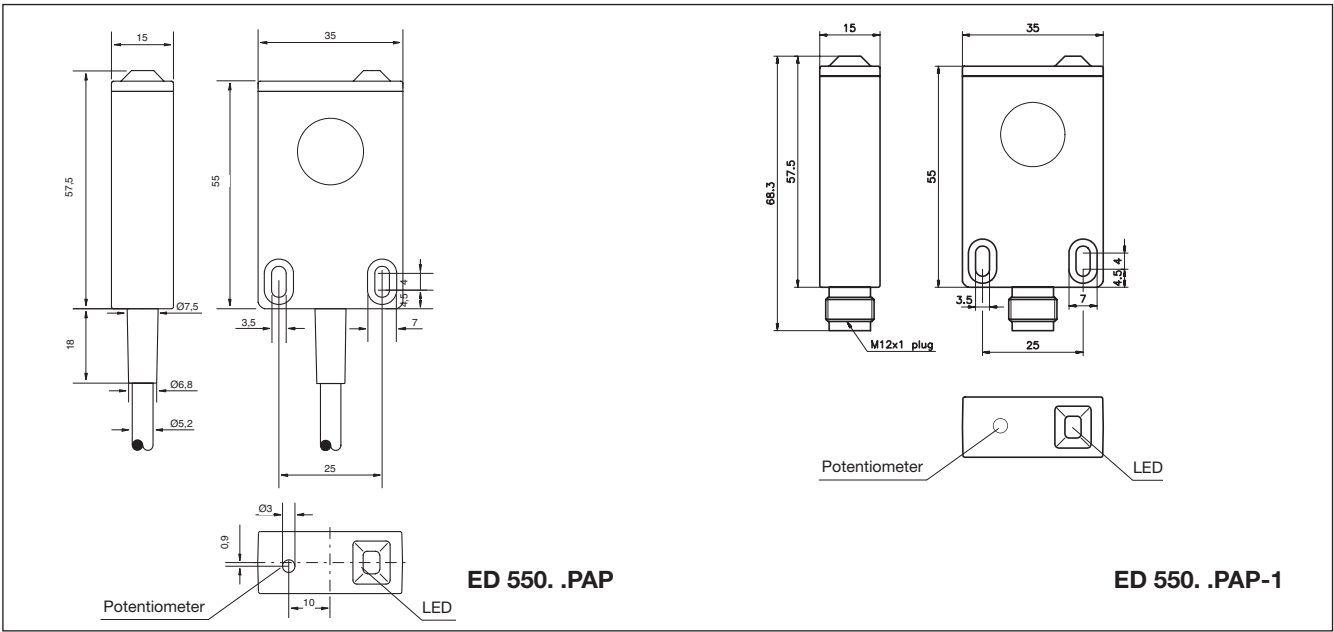

Operation Diagram




Installation Hints

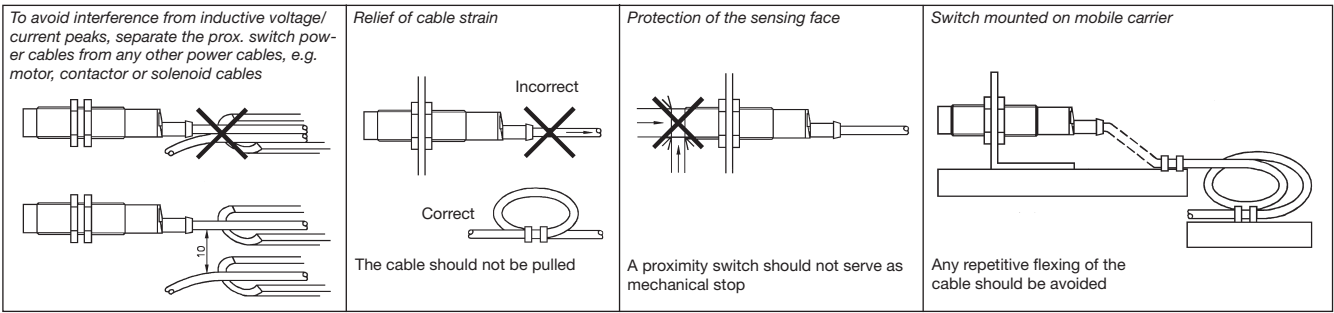

Truth Table

	Make switching		Break switching	
	No	Yes	No	Yes
DC types				
LED	OFF	ON	OFF	ON
Load	Non-active	Active	Active	Non-active
Output NPN	High	Low	Low	High
Output PNP	Low	High	High	Low

Wiring Diagrams

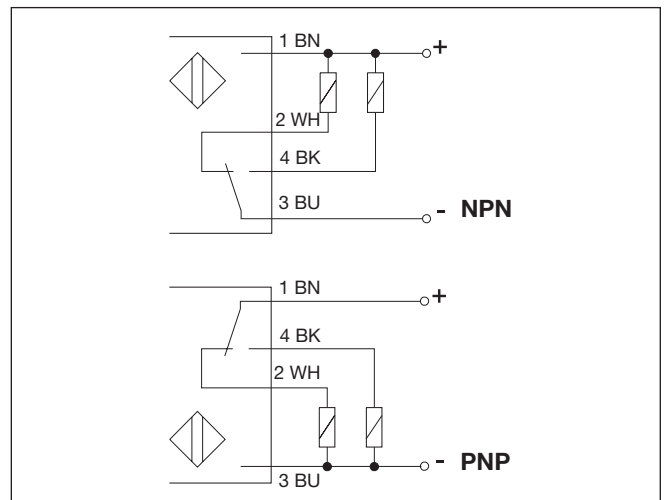

Accessories

- Connector type CON.1A../CON.14NF.. series

Delivery Contents

- Photoelectric switch: ED 550.
- Screw driver
- Packaging: plastic bag