

### INTRODUCTION:

Adam Tech DVI series Digital Visual Interface connectors are the standard digital interface for flat panels, video graphics cards, monitors, and HDTV units. This series includes DVI-D (Digital), DVI-A (Analog) and DVI-I (Integrated Digital/Analog). Their unique crossing ground blades provide high speed performance at low cost. They are available in Straight or Right Angle PCB mount receptacles and mating male cable connectors. They support a data transfer rate of 4.95Gbps with a dielectric withstanding voltage of 500VAC. Each version features our specially designed contacts which improve signal performance and a zinc alloy shield that reduces electromagnetic interference (EMI).

### FEATURES:

- Supports Analog and Digital signals
- Offers excellent EMI/RFI performance
- Plug and Play interface
- Supports high bandwidth up to 2.5 GHz analog signal
- Variety of Mating and mounting options

### MATING CONNECTORS:

Adam Tech DVI connectors and all industry standard DVI connectors.

### SPECIFICATIONS:

#### Material:

Standard insulator: PA66, Glass filled, rated UL94V-0  
Optional Hi-Temp insulator: Nylon 6T rated UL94V-0  
Insulator Color: White, (Black optional)  
Contacts: Phosphor Bronze  
Shell: Steel, Nickel Plated

#### Contact Plating:

Gold Flash over nickel underplate on mating area,  
Tin over Copper underplate on tails

#### Electrical:

Operating Voltage: 250V AC  
Current Rating: 1.5 Amps max.  
Contact Resistance: 20 mΩ max. initial  
Insulation Resistance: 1000 MΩ min.  
Dielectric Withstanding Voltage: 500V AC for 1 minute

#### Mechanical:

Insertion force: 10 lb max.  
Withdrawal force: 2.2 lb. min.  
Durability: 100 cycles

#### Temperature Rating:

Operating Temperature: -55°C to +85°C  
Soldering process temperature:  
Standard insulator: 235°C  
Hi-Temp insulator: 260°C

### PACKAGING:

Anti-ESD plastic trays


### APPROVALS AND CERTIFICATIONS:

UL Recognized File No. E224053  
CSA Certified File No. LR1578596

**HI-TEMP**  
INSULATOR  
AVAILABLE



### ORDERING INFORMATION

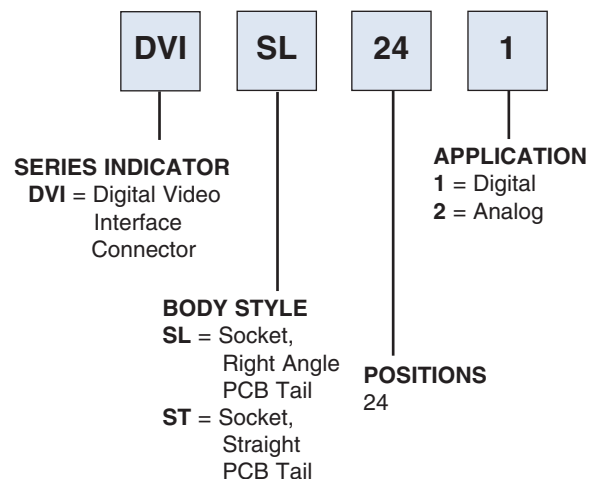

### OPTIONS:

Add designator(s) to end of part number

**BK** = Insulator color black

**JS** = Jackscrews Installed

**HT** = Hi-Temp insulator for Hi-Temp soldering processes up to 260°C