



Bias Resistor Transistor NPN Silicon

Pb Lead(Pb)-Free



SOT-723

Maximum Ratings (TA=25°C unless otherwise noted)

Rating	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	50	V
Collector Current-Continuous	I_C	100	mA

Thermal Characteristics

Characteristics	Symbol	Max	Unit
Total Device Dissipation FR-5 Board FR-4 Board ⁽¹⁾ TA=25°C Derate above 25°C	P_D	260 2.0	mW mW/°C
Thermal Resistance, Junction to Ambient ⁽¹⁾	$R_{\theta JA}$	480	°C/W
Total Device Dissipation FR-5 Board FR-4 Board ⁽²⁾ TA=25°C Derate above 25°C	P_D	600 4.8	mW mW/°C
Thermal Resistance, Junction to Ambient ⁽²⁾	$R_{\theta JA}$	205	°C/W
Junction Temperature Range	T_J	+150	°C
Storage Temperature Range	T_{stg}	-55 to +150	°C

1. FR-4 @ Minimum pad

2. FR-4 @ 1.0 x 1.0 Inch pad

Device Marking and Resistor Values

Device	Marking	R1(K)	R2(K)
DTC114EM	8A	10	10
DTC124EM	8B	22	22
DTC144EM	8C	47	47
DTC114YM	8D	10	47
DTC114TM	94	10	∞
DTC143TM	8F	4.7	∞
DTC123EM	8H	2.2	2.2

Device	Marking	R1(K)	R2(K)
DTC143EM	8J	4.7	4.7
DTC143ZM	8K	4.7	47
DTC124XM	8L	22	47
DTC123JM	8M	2.2	47
DTC115EM	8N	100	100
DTC144WM	8P	47	22
DTC144TM	8T	47	∞

Electrical Characteristics ($T_A=25^\circ\text{C}$ Unless Otherwise noted)

Characteristics	Symbol	Min	Typ	Max	Unit
-----------------	--------	-----	-----	-----	------

Off Characteristics

Collector-Emitter Breakdown Voltage ⁽¹⁾ $I_C=2.0\text{mA}$, $I_B=0$		$V_{(BR)CEO}$	50	-	-	V
Collector-Base Breakdown Voltage $I_C=10\mu\text{A}$, $I_E=0$		$V_{(BR)CBO}$	50	-	-	V
Collector-Base Cutoff Voltage $V_{CB}=50\text{V}$, $I_E=0$		I_{CBO}	-	-	100	nA
Collector-Emitter Cutoff Current $V_{CE}=50\text{V}$, $I_B=0$		I_{CEO}	-	-	500	nA
Emitter-Base Cutoff Current $V_{EB}=6.0\text{V}$, $I_C=0$	DTC114EM	I_{EBO}	-	-	0.5	mA
	DTC124EM		-	-	0.2	
	DTC144EM		-	-	0.1	
	DTC114YM		-	-	0.2	
	DTC114TM		-	-	0.9	
	DTC143TM		-	-	1.9	
	DTC123EM		-	-	2.3	
	DTC143EM		-	-	1.5	
	DTC143ZM		-	-	0.18	
	DTC124XM		-	-	0.13	
	DTC123JM		-	-	0.2	
	DTC115EM		-	-	0.05	
	DTC144WM		-	-	0.13	
	DTC144TM		-	-	0.2	

3. Pulse Test: Pulse Width < 300us, Duty Cycle < 2.0%

Electrical Characteristics (TA=25°C Unless Otherwise noted)

Characteristics	Symbol	Min	Typ	Max	Unit
-----------------	--------	-----	-----	-----	------

On Characteristics⁽³⁾

DC Current Gain V _{CE} =10V, I _C =5.0mA	DTC114EM	h _{FE}	35	60	-	-	
	DTC124EM		60	100	-		
	DTC144EM		80	140	-		
	DTC114YM		80	140	-		
	DTC114TM		160	250	-		
	DTC143TM		160	250	-		
	DTC123EM		8.0	15	-		
	DTC143EM		15	27	-		
	DTC143ZM		80	140	-		
	DTC124XM		80	130	-		
	DTC123JM		80	140	-		
	DTC115EM		80	150	-		
	DTC144WM		80	140	-		
	DTC144TM		160	350	-		
Collector-Emitter Saturation Voltage I _C =10mA, I _B =0.3mA I _C =10mA, I _B =5.0mA I _C =10mA, I _B =1.0mA		V _{CE(sat)}	-	-	0.25	-	
DTC123EM							
DTC143TM / DTC114TM							
DTC143EM / DTC143ZM DTC124XM / DTC144TM							
Output Voltage(on) V _{CC} =5.0V, V _B =2.5V R _L =1.0KΩ V _{CC} =5.0V, V _B =3.5V R _L =1.0KΩ V _{CC} =5.0V, V _B =5.5V R _L =1.0KΩ V _{CC} =5.0V, V _B =4.0V R _L =1.0KΩ		V _{OL}	-	-	0.2	V	
							DTC114EM
							DTC124EM
							DTC114YM
							DTC114TM
							DTC143TM
							DTC123EM
							DTC143EM
							DTC143ZM
							DTC124XM
							DTC123JM
							DTC144EM
							DTC144TM
							DTC115EM
DTC144WM							

3. Pulse Test: Pulse Width < 300us, Duty Cycle < 2.0%


Electrical Characteristics ($T_A=25^{\circ}\text{C}$ Unless Otherwise noted)

Characteristics	Symbol	Min	Typ	Max	Unit
-----------------	--------	-----	-----	-----	------

On Characteristics⁽⁴⁾

Output Voltage(off) $V_{CC}=5.0\text{V}$, $V_B=0.5\text{V}$ $R_L=1.0\text{k}\Omega$ $V_{CC}=5.0\text{V}$, $V_B=0.25\text{V}$ $R_L=1.0\text{k}\Omega$	DTC143TM DTC143ZM DTC114TM DTC144TM	V_{OH}	4.9	-	-	V
Input Resistor	DTC114EM DTC124EM DTC144EM DTC114YM DTC114TM DTC143TM DTC123EM DTC143EM DTC143ZM DTC124XM DTC123JM DTC115EM DTC144WM DTC144TM	R_1	7.0 15.4 32.9 7.0 7.0 3.3 1.5 3.3 3.3 15.4 15.4 70 32.9 32.9	10 22 47 10 10 4.7 2.2 4.7 4.7 22 2.2 100 47 47	13 28.6 61.1 13 13 6.1 2.9 6.1 6.1 28.6 2.86 130 61.1 61.1	$\text{k}\Omega$
Resistor Ratio	DTC114EM / DTC124EM DTC144EM / DTC115EM DTC114YM DTC143TM / DTC114TM / DTC144TM DTC123EM / DTC143EM DTC143ZM DTC124XM DTC123JM DTC144WM	R_1/R_2	0.8 0.17 - 0.8 0.055 0.38 0.038 1.7	1.0 0.21 - 1.0 0.1 0.47 0.047 2.1	1.2 0.25 - 1.2 0.185 0.56 0.056 2.6	-

4. PulseTest: Pulse Width < 300us, Duty Cycle < 2.0%

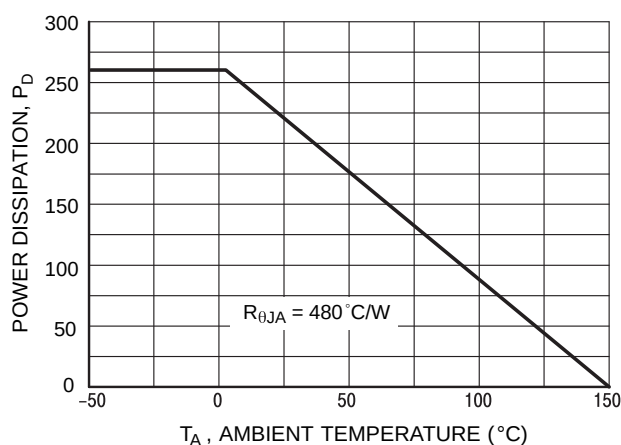**Figure.1 Derating Curve**

TYPICAL ELECTRICAL CHARACTERISTICS - DTC114EM Series

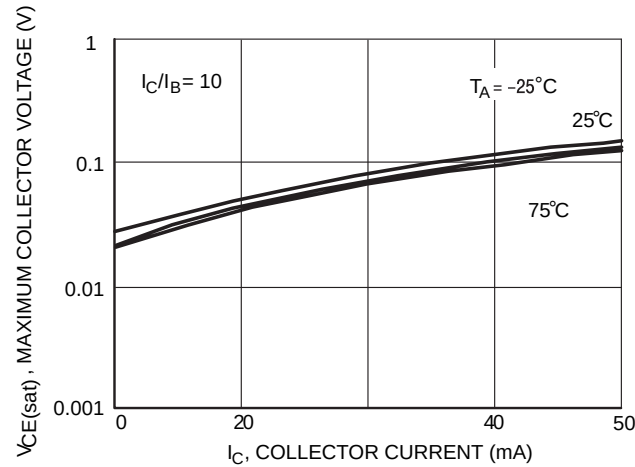


Figure.2 $V_{CE(sat)}$ vs I_C

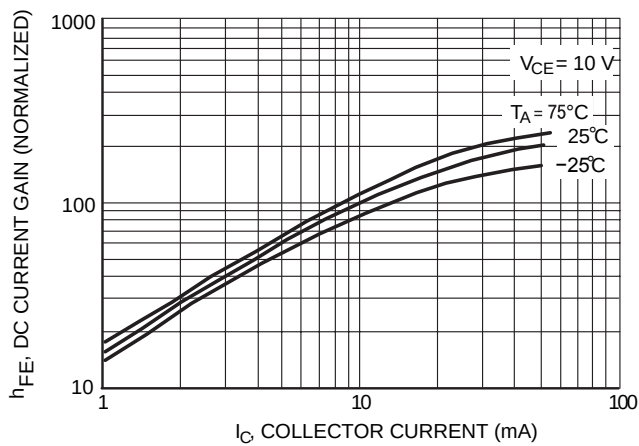


Figure.3 DC Current Gain

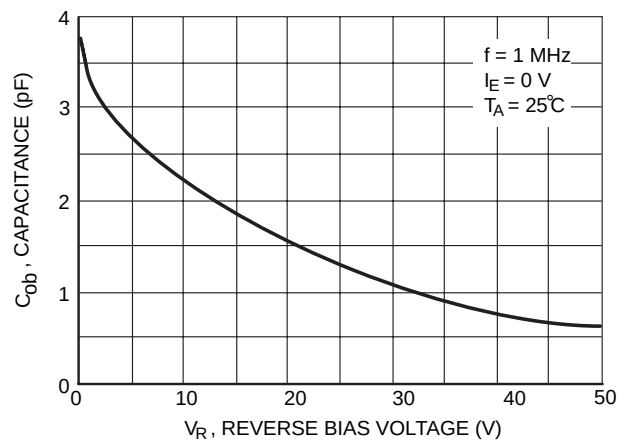


Figure.4 Output Capacitance

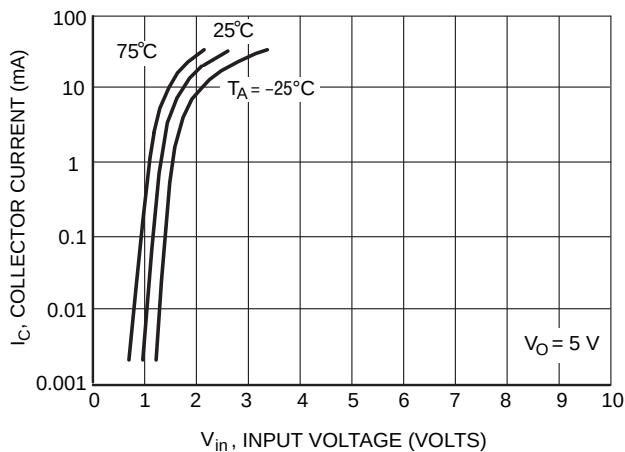


Figure.5 Output Current vs Input Voltage

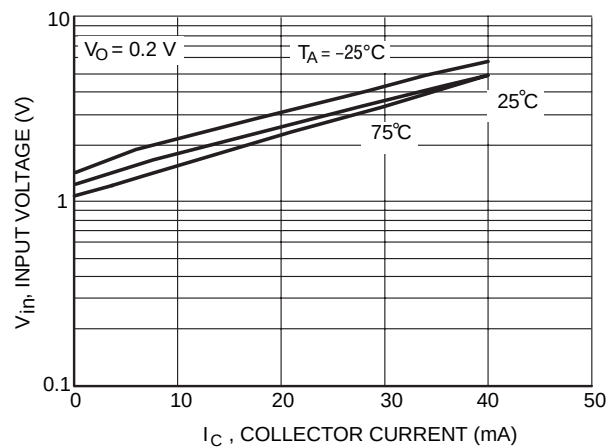


Figure.6 Input Voltage vs Output Current

TYPICAL ELECTRICAL CHARACTERISTICS - DTC124EM

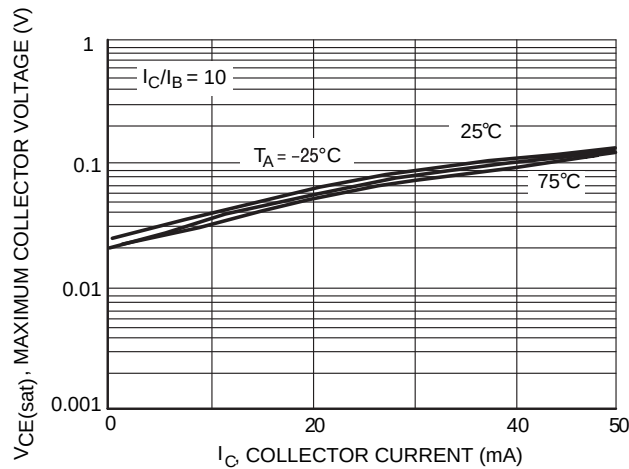
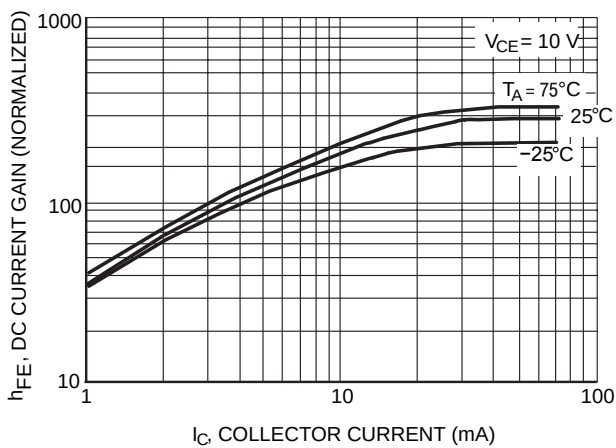
Figure.7 $V_{CE(sat)}$ vs I_C 

Figure 8. DC Current Gain

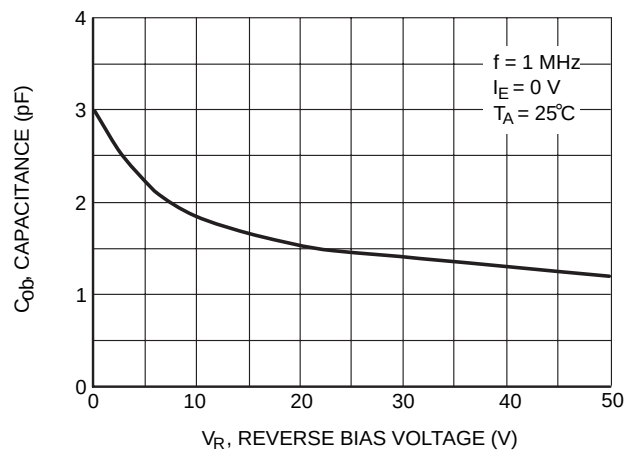


Figure.9 Output Capacitance

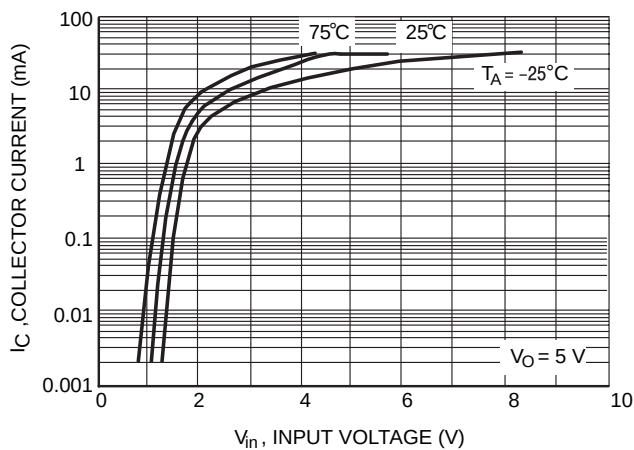


Figure.10 Output Current vs Input Voltage

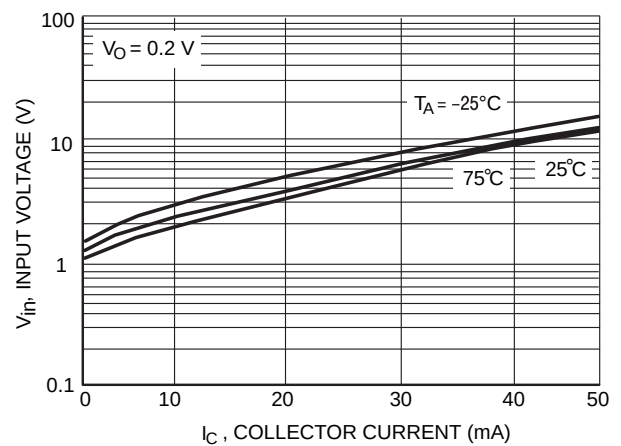


Figure.11 Input Voltage versus Output Current

TYPICAL ELECTRICAL CHARACTERISTICS – DTC144EM

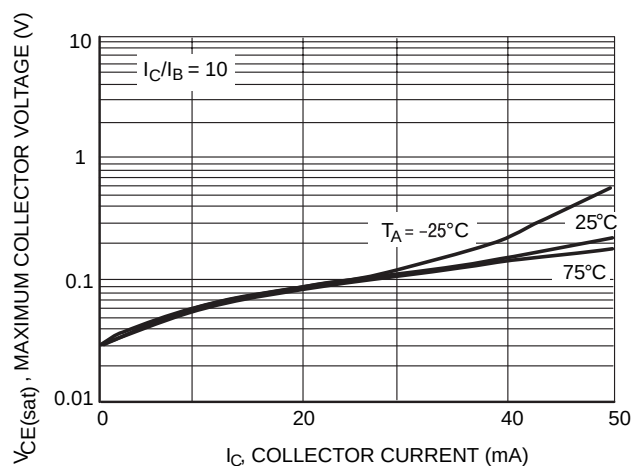


Figure.12 $V_{CE(sat)}$ vs I_C

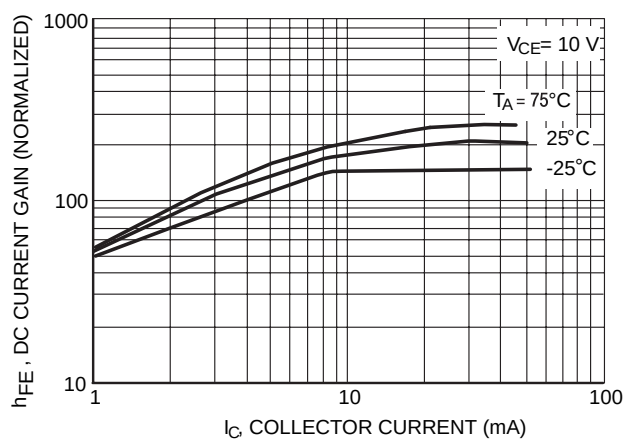


Figure.13 DC Current Gain

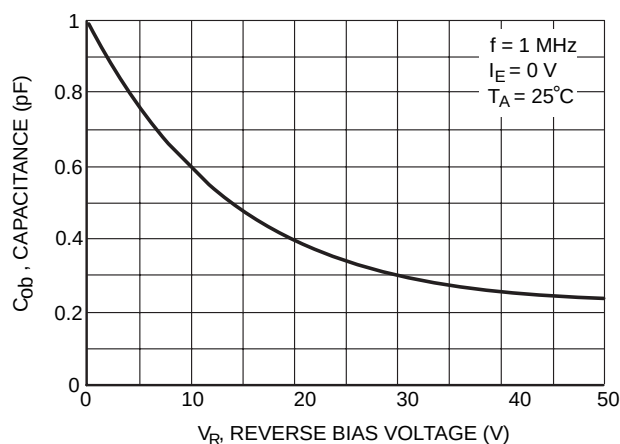


Figure 14. Output Capacitance

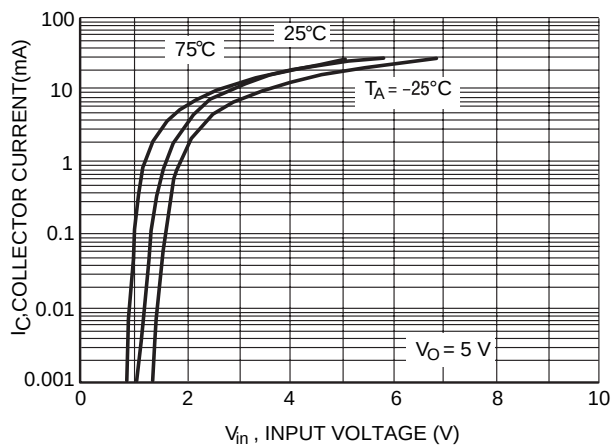


Figure.15 Output Current vs Input Voltage

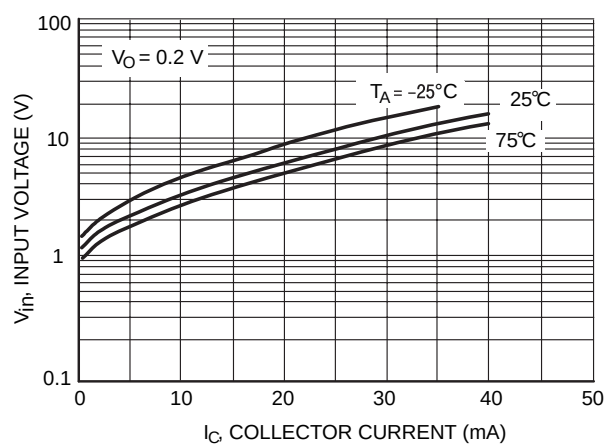


Figure.16 Input Voltage vs Output Current

TYPICAL ELECTRICAL CHARACTERISTICS – DTC114YM

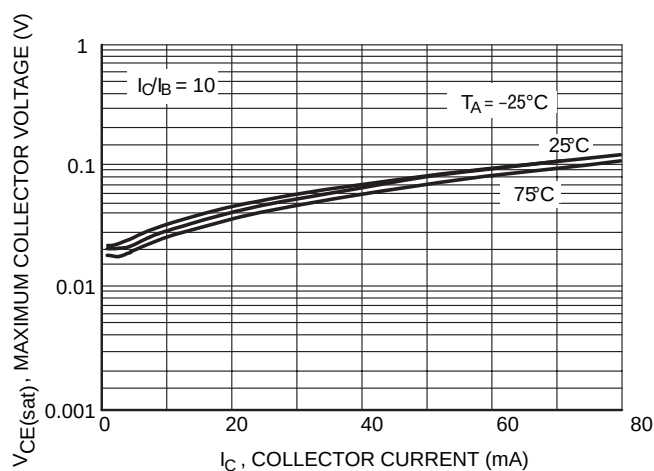


Figure.17 $V_{CE(sat)}$ vs I_C

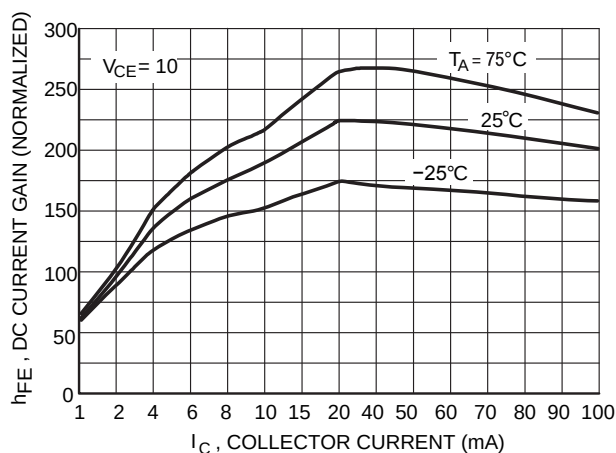


Figure.18 DC Current Gain

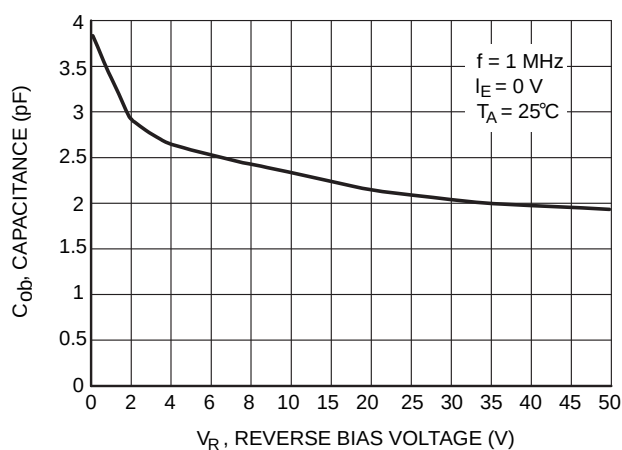


Figure.19 Output Capacitance

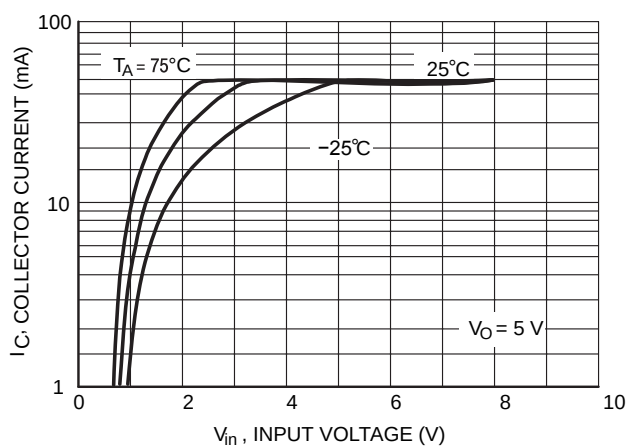


Figure.20 Output Current vs Input Voltage

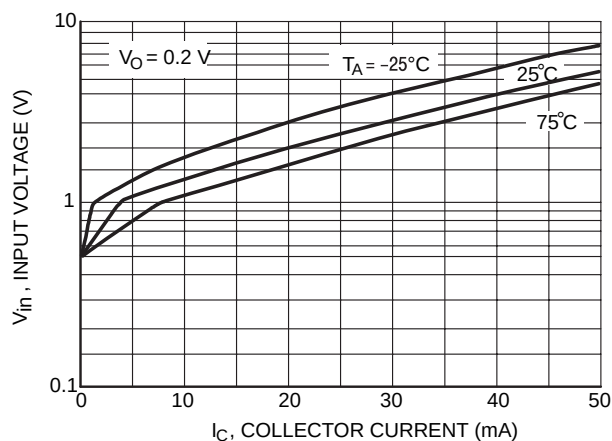


Figure.21 Input Voltage vs Output Current

TYPICAL APPLICATIONS FOR NPN BRTs

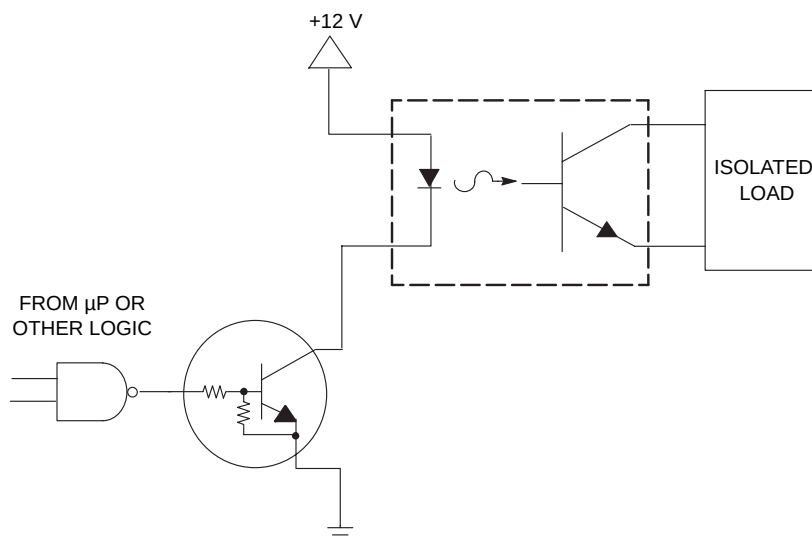


Figure.22 Level Shifter: Connects 12 or 24 Volt Circuits to Logic





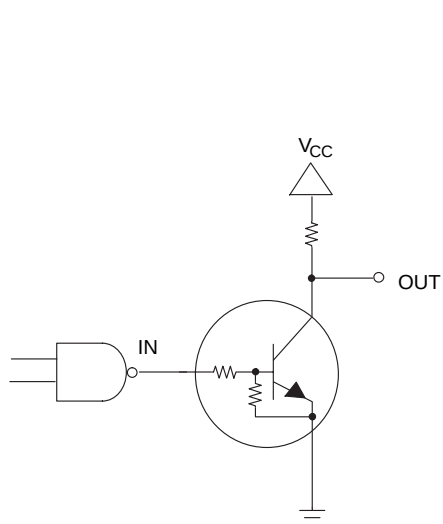
Figure.23 Open Collector Inverter:
Inverts the Input Signal

Figure.24 Inexpensive, Unregulated Current Source

SOT-723 Outline Demensions

Unit:mm

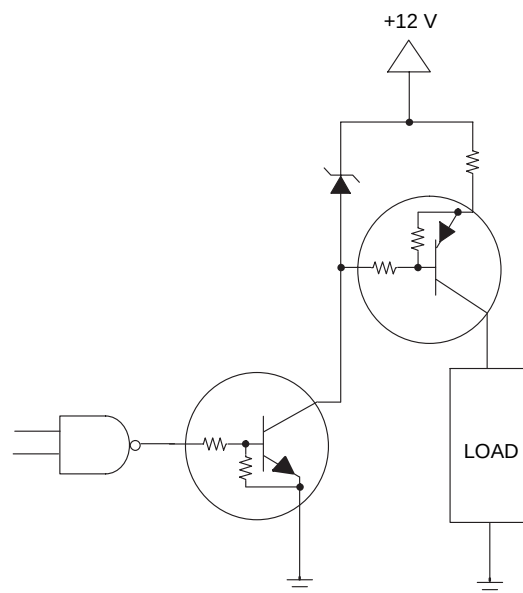

SOT-723			
Dim	Min	Nom	Max
A	0.45	0.50	0.55
b	0.15	0.20	0.27
b1	0.25	0.3	0.35
C	0.07	0.12	0.17
D	1.15	1.20	1.25
E	0.75	0.80	0.85
e	0.40 BSC		
H _E	1.15	1.20	1.25
L	0.15	0.20	0.25

SOLDERING FOOTPRINT

Unit:mm

