



120W Single Output Industrial DIN RAIL Power Supply

DRH-120 series



■ Features :

- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Built-in constant current limiting circuit
- Can be installed on DIN rail TS-35/7.5 or 15
- EN61000-6-2(EN50082-2) industrial immunity level
- 100% full load burn-in test
- Fixed switching frequency at 70KHz
- 3 years warranty




SPECIFICATION


SPECIFICATION			
MODEL		DRH-120-24	DRH-120-48
OUTPUT	DC VOLTAGE	24V	
	DC VOLTAGE	48V	
	RATED CURRENT	5A	
	RATED CURRENT	2.5A	
	CURRENT RANGE	0 ~ 5A	
	CURRENT RANGE	0 ~2.5A	
	RATED POWER	120W	
	RATED POWER	120W	
	RIPPLE & NOISE (max.) Note.2	80mVp-p	
	RIPPLE & NOISE (max.) Note.2	80mVp-p	
VOLTAGE ADJ. RANGE	24 ~ 28V		
VOLTAGE ADJ. RANGE	48 ~ 55V		
VOLTAGE TOLERANCE Note.3	±1.0%		
VOLTAGE TOLERANCE Note.3	±1.0%		
LINE REGULATION	±0.5%		
LINE REGULATION	±0.5%		
LOAD REGULATION	±0.5%		
LOAD REGULATION	±0.5%		
SETUP, RISE, HOLD UP TIME	1700ms, 120ms, 16ms/400VAC 1000ms, 120ms, 30ms/500VAC at full load		
INPUT	VOLTAGE RANGE	340 ~ 550VAC 480 ~ 780VDC	
	VOLTAGE RANGE	340 ~ 550VAC 480 ~ 780VDC	
	FREQUENCY RANGE	47 ~ 63Hz	
	FREQUENCY RANGE	47 ~ 63Hz	
	EFFICIENCY (Typ.)	85%	
	EFFICIENCY (Typ.)	86%	
AC CURRENT	0.65A/400VAC 0.6A/500VAC		
AC CURRENT	0.65A/400VAC 0.6A/500VAC		
INRUSH CURRENT (max.)	COLD START 50A		
INRUSH CURRENT (max.)	COLD START 50A		
LEAKAGE CURRENT	<3.5mA / 530VAC		
LEAKAGE CURRENT	<3.5mA / 530VAC		
PROTECTION	OVERLOAD	105 ~ 160% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed	
	OVERLOAD	105 ~ 160% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed	
	OVER VOLTAGE	30 ~ 36V 59 ~ 66V Protection type : Shut down o/p voltage, re-power on to recover	
	OVER VOLTAGE	30 ~ 36V 59 ~ 66V Protection type : Shut down o/p voltage, re-power on to recover	
OVER TEMPERATURE	85℃ ±5℃ (TSW) detect on heatsink of power switch Protection type : Shut down o/p voltage, recovers automatically after temperature goes down		
OVER TEMPERATURE	85℃ ±5℃ (TSW) detect on heatsink of power switch Protection type : Shut down o/p voltage, recovers automatically after temperature goes down		
ENVIRONMENT	WORKING TEMP.	-20 ~ +60℃ (Refer to output load derating curve)	
	WORKING HUMIDITY	20 ~ 90% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH	
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)	
	VIBRATION	Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting clip: Compliance to IEC60068-2-6	
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL60950-1 approved, IEC60950-1 CB approved by SIQ	
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC	
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC	
	EMI CONDUCTION & RADIATION	Compliance to EN55011 (CISPR11), EN55022 (CISPR22), EN61204-3 Class B	
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61204-3, EN61000-6-2 (EN50082-2), heavy industry level, criteria A	
OTHERS	MTBF	178.7Khrs min. MIL-HDBK-217F (25℃)	
	DIMENSION	65.5*125.2*100mm (W*H*D)	
	PACKING	0.75Kg; 20pcs/16Kg/1.29CUFT	
NOTE	1. All parameters NOT specially mentioned are measured at 400VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.		

Mechanical Specification

Case No.921A Unit:mm

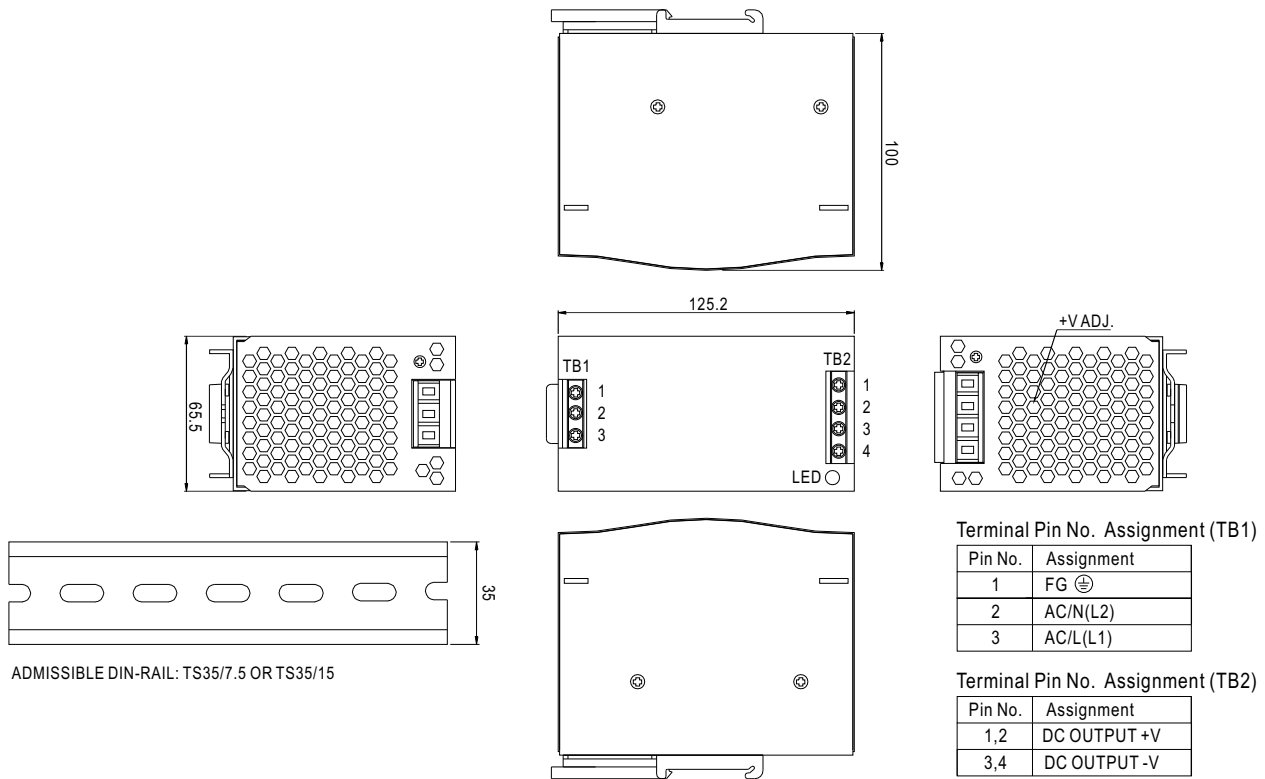

Block Diagram

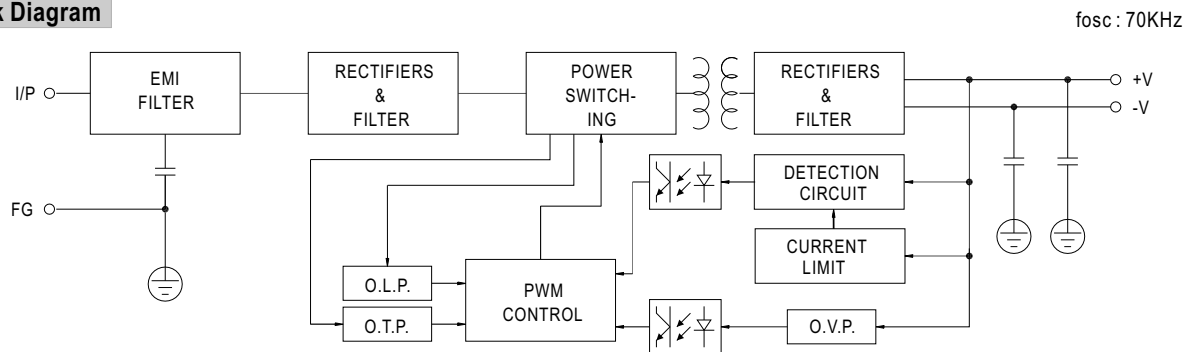

Derating Curve

