

Low Voltage, Dual DPDT and Quad SPDT Analog Switches

DESCRIPTION

The DG2018 and DG2019 are low voltage, single supply analog switches. The DG2018 is a dual double-pole/double-throw (DPDT) with two control inputs that each controls a pair of single-pole/double-throw (SPDT). The DG2019 uses one control pin to operate four independent SPDT switches.

When operated on a + 3 V supply, the DG2018's control pins are compatible with 1.8 V digital logic. The DG2019 has an available feature of a V_L pin that allows a 1.0 V threshold for the control pin when V_L is powered with 1.5 V.

Built on Vishay Siliconix's low voltage submicron CMOS process, the DG2018 and DG2019 are ideal for high performance switching of analog signals; providing low on-resistance ($6\ \Omega$ at + 2.7 V), fast speed (T_{on} , T_{off} at 42 ns and 16 ns), and a bandwidth that exceeds 180 MHz.

The DG2018 and DG2019 were designed to offer solutions that extend beyond audio/video functions, to providing the performance required for today's demanding mixed-signal switching in portable applications.

An epitaxial layer prevents latch-up. Brake-before-make is guaranteed for all SPDT's. All switches conduct equally well in both directions when on, and blocks up to the power supply level when off.

FEATURES

- Low voltage operation (1.8 V to 5.5 V)
- Low on resistance
 - $R_{DS(on)}$: $6\ \Omega$ at 2.7 V
- Low voltage logic compatible
 - DG2019: $V_{INH} = 1\text{ V}$
- High bandwidth: 180 MHz
- QFN-16 package

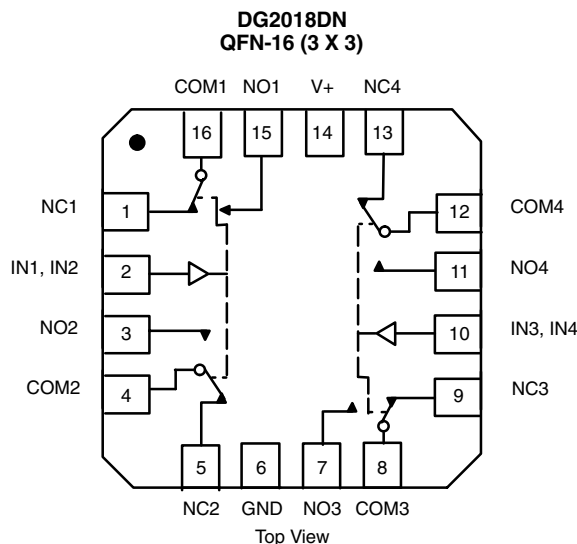
BENEFITS

- Ideal for both analog and digital signal switching
- Reduced power consumption
- High accuracy
- Reduced PCB space
- Fast switching
- Low leakage

APPLICATIONS

- Cellular phones
- Audio and video signal routing
- PCMCIA cards
- Battery operated systems
- Portable instrumentation

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION



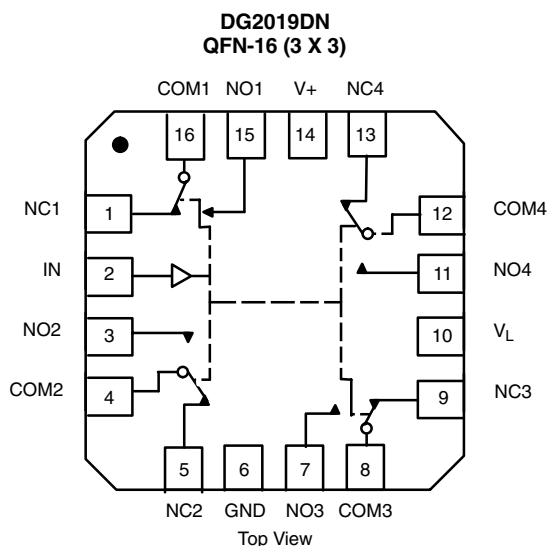
TRUTH TABLE

IN1, IN2		
Logic	NC1 and NC2	NO1 and NO2
0	ON	OFF
1	OFF	ON
IN3, IN4		
Logic	NC3 and NC4	NO3 and NO4
0	ON	OFF
1	OFF	ON

ORDERING INFORMATION

Temp. Range	Package	Part Number
- 40 °C to 85 °C	QFN-16 (3 x 3 mm)	DG2018DN

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION



TRUTH TABLE

Logic	NC1, 2, 3 and 4	NO1, 2, 3 and 4
0	ON	OFF
1	OFF	ON

ORDERING INFORMATION

Temp. Range	Package	Part Number
- 40 °C to 85 °C	QFN-16 (3 x 3 mm)	DG2019DN

ABSOLUTE MAXIMUM RATINGS

Parameter	Limit	Unit
Reference V+ to GND	- 0.3 to + 6	V
IN, COM, NC, NO	- 0.3 to (V+ + 0.3)	
Continuous Current (Any terminal)	± 50	mA
Peak Current (Pulsed at 1 ms, 10 % Duty Cycle)	± 100	
Storage Temperature (D Suffix)	- 65 to 150	°C
Power Dissipation (Packages) ^b	QFN-16 (3 x 3 mm) ^c	850
		mW

Notes:

a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

b. All leads welded or soldered to PC board.

c. Derate 4.0 mW/°C above 70 °C.



SPECIFICATIONS V+ = 3 V							
Parameter	Symbol	Test Conditions Otherwise Unless Specified V+ = 3 V, ± 10 %, (DG2018 Only) VIN = 0.5 or 1.4 V ^e (DG2019 Only) VL = 1.5 V, VIN = 0.4 or 1.0 V ^e	Temp. ^a	Limits - 40 °C to 85 °C			Unit
				Min. ^b	Typ. ^c	Max. ^b	
Analog Switch							
Analog Signal Range ^d	VNO, VNC, VCOM		Full	0		V+	V
On-Resistance	RON	V+ = 2.7 V, VCOM = 0.2 V/1.5 V INO, INC = 10 mA	Room Full		6	12 15	Ω
RON Flatness	RON Flatness	V+ = 2.7 V VCOM = 0 to V+, INO, INC = 10 mA	Room		0.5	2	
RON Match Between Channels	ΔRON		Room		0.6	3	
Switch Off Leakage Current	INO(off) INC(off)	V+ = 3.3 V, VNO, VNC = 0.3 V/3 V VCOM = 3 V/0.3 V	Room Full	- 1 - 10	0.3	1 10	nA
	ICOM(off)		Room Full	- 1 - 10	0.3	1 10	
Channel-On Leakage Current	ICOM(on)	V+ = 3.3 V, VNO, VNC = VCOM = 0.3 V/3 V	Room Full	- 1 10	0.3	1 10	
Digital Control							
Input High Voltage	VINH		DG2018	Full	1.4		V
		VL = 1.5 V	DG2019	Full	1.0		
Input Low Voltage	VINL		DG2018	Full		0.5	
		VL = 1.5 V	DG2019	Full		0.4	
Input Capacitance	Cin	f = 1 MHz	Full		9		pF
Input Current	INIL or INIH	VIN = 0 or V+	Full	- 1		1	μA
Dynamic Characteristics							
Turn-On Time	tON	VNO or VNC = 2.0 V, RL = 300 Ω, CL = 35 pF	Room Full		42	55 65	ns
Turn-Off Time	tOFF		Room Full		16	25 35	
Break-Before-Make Time	td	VNO or VNC = 2.0 V, RL = 50 Ω, CL = 35 pF	Full	1			
Charge Injection ^d	QINJ	CL = 1 nF, VGEN = 0 V, RGEN = 0 Ω	Room		- 1.46		pC
Off-Isolation ^d	OIRR	RL = 50 Ω, CL = 5 pF, f = 1 MHz	Room		- 67		dB
Crosstalk ^d	XTALK		Room		- 72		
Bandwidth ^d	BW		Room		180		MHz
NO, NC Off Capacitance ^d	CNO(off)	VIN = 0 or V+, f = 1 MHz	Room		9		pF
	CNC(off)		Room		9		
Channel-On Capacitance ^d	CNO(on)		Room		30		
	CNC(on)		Room		30		
Power Supply							
Power Supply Current	I+	VIN = 0 or V+	Full		0.01	1.0	μA

Notes:

a. Room = 25 °C, Full = as determined by the operating suffix.

b. Typical values are for design aid only, not guaranteed nor subject to production testing.

c. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.

d. Guarantee by design, nor subjected to production test.

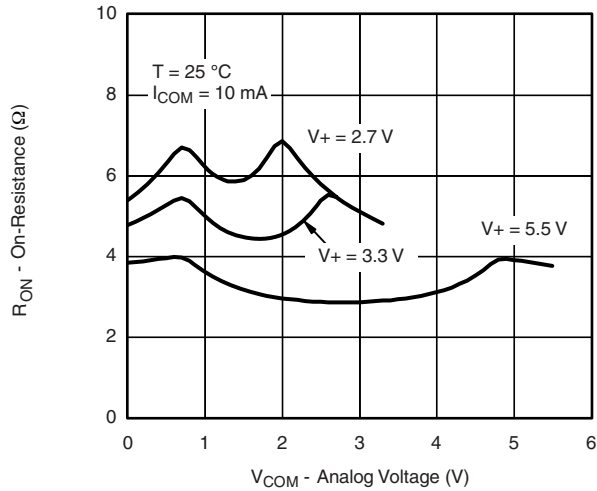
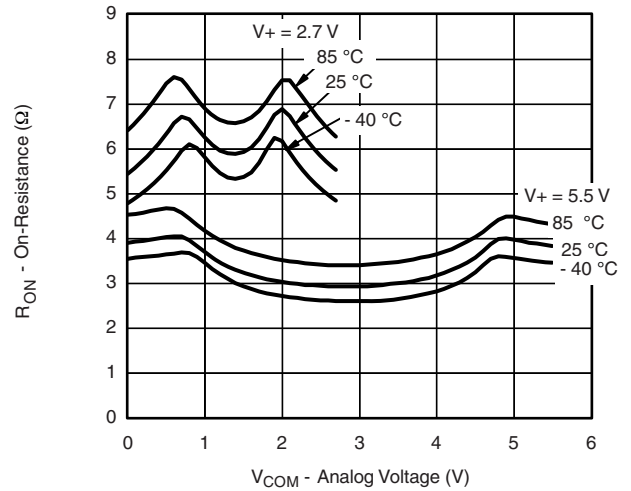
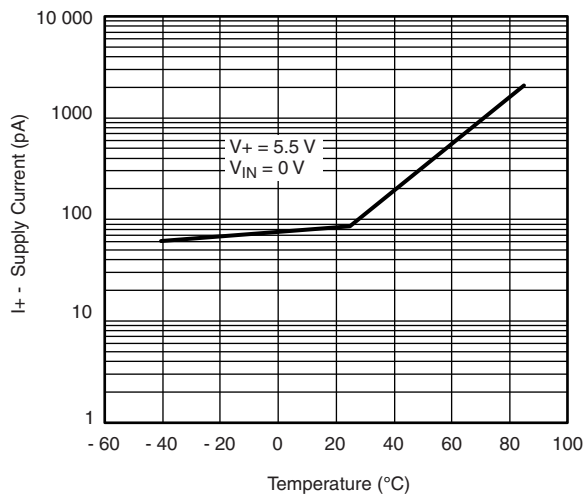
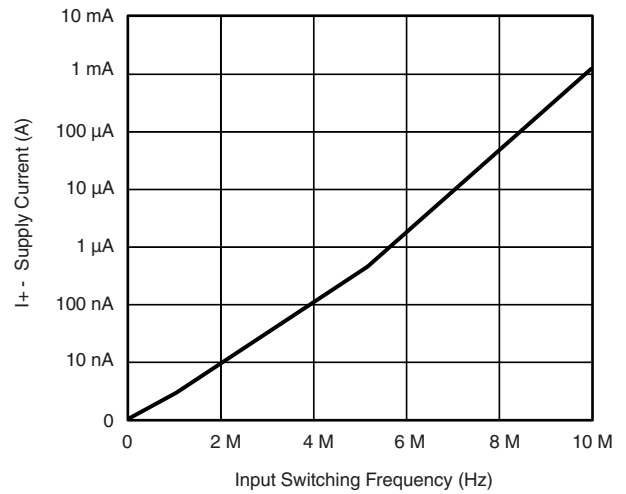
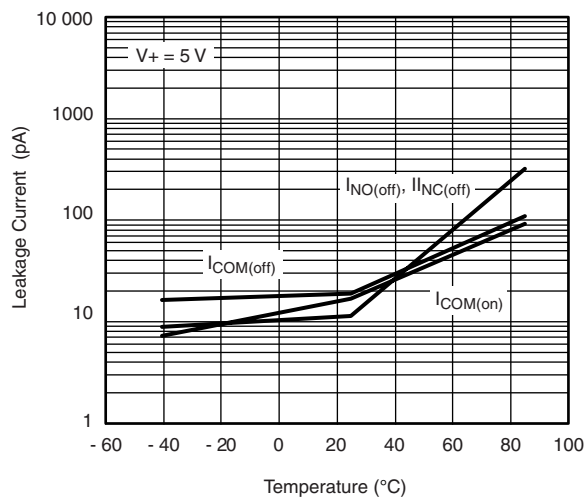
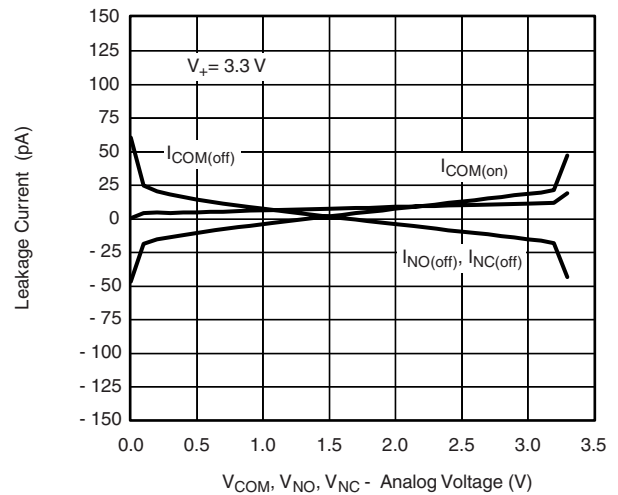
e. V_{IN} = input voltage to perform proper function.

SPECIFICATIONS $V_+ = 5\text{ V}$								
Parameter	Symbol	Test Conditions Otherwise Unless Specified $V_+ = 5\text{ V}, \pm 10\%$, (DG2018 Only) $V_{\text{IN}} = 0.8$ or 1.8 V^e (DG2019 Only) $V_{\text{L}} = 1.5\text{ V}, V_{\text{IN}} = 0.4$ or 1.0 V^e		Temp. ^a	Limits - 40 °C to 85 °C			Unit
					Min. ^b	Typ. ^c	Max. ^b	
Analog Switch								
Analog Signal Range ^d	$V_{\text{NO}}, V_{\text{NC}}, V_{\text{COM}}$			Full	0		V_+	V
On-Resistance	R_{ON}	$V_+ = 4.5\text{ V}, V_{\text{COM}} = 3\text{ V}, I_{\text{NO}}, I_{\text{NC}} = 10\text{ mA}$		Room Full		4	8 10	Ω
R_{ON} Flatness	R_{ON} Flatness	$V_+ = 4.5\text{ V}$ $V_{\text{COM}} = 0$ to $V_+, I_{\text{NO}}, I_{\text{NC}} = 10\text{ mA}$		Room		0.6	1.2	
R_{ON} Match Between Channels	ΔR_{ON}			Room		0.6	1.2	
Switch Off Leakage Current ^f	$I_{\text{NO(off)}}$ $I_{\text{NC(off)}}$	$V_+ = 5.5\text{ V}$ $V_{\text{NO}}, V_{\text{NC}} = 1\text{ V}/4.5\text{ V}, V_{\text{COM}} = 4.5\text{ V}/1\text{ V}$		Room Full	- 1 - 10	0.03	1 10	nA
	$I_{\text{COM(off)}}$			Room Full	- 1 - 10	0.03	1 10	
Channel-On Leakage Current ^f	$I_{\text{COM(on)}}$	$V_+ = 5.5\text{ V}, V_{\text{NO}}, V_{\text{NC}} = V_{\text{COM}} = 1\text{ V}/4.5\text{ V}$		Room Full	- 1 - 10	0.03	1 10	
Digital Control								
Input High Voltage	V_{INH}		DG2018	Full	1.8			V
		$V_{\text{L}} = 1.5\text{ V}$	DG2019	Full	1.0			
Input Low Voltage	V_{INL}		DG2018	Full			0.8	
		$V_{\text{L}} = 1.5\text{ V}$	DG2019	Full			0.4	
Input Capacitance	C_{in}			Full		9		pF
Input Current	I_{INL} or I_{INH}	$V_{\text{IN}} = 0$ or V_+		Full	1		1	μA
Dynamic Characteristics								
Turn-On Time	t_{ON}	V_{NO} or $V_{\text{NC}} = 3\text{ V}, R_{\text{L}} = 300\ \Omega, C_{\text{L}} = 35\text{ pF}$		Room Full		44	48 52	ns
Turn-Off Time	t_{OFF}			Room Full		19	33 35	
Break-Before-Make Time	t_{d}	V_{NO} or $V_{\text{NC}} = 3\text{ V}, R_{\text{L}} = 50\ \Omega, C_{\text{L}} = 35\text{ pF}$		Full	1			
Charge Injection ^d	Q_{INJ}	$C_{\text{L}} = 1\text{ nF}, V_{\text{GEN}} = 0\text{ V}, R_{\text{GEN}} = 0\ \Omega$		Room		- 2.46		pC
Off-Isolation ^d	OIRR	$R_{\text{L}} = 50\ \Omega, C_{\text{L}} = 5\text{ pF}, f = 1\text{ MHz}$		Room		- 67		dB
Crosstalk ^d	X_{TALK}			Room		- 72		
Bandwidth ^d	BW			Room		180		MHz
Source-Off Capacitance ^d	$C_{\text{NO(off)}}$	$V_{\text{IN}} = 0$ or $V_+, f = 1\text{ MHz}$		Room		7.5		pF
	$C_{\text{NC(off)}}$			Room		7.5		
Channel-On Capacitance ^d	$C_{\text{NO(on)}}$			Room		30		
	$C_{\text{NC(on)}}$			Room		30		
Power Supply								
Power Supply Range	V_+				1.8		5.5	V
Power Supply Current	I_+	$V_{\text{IN}} = 0$ or V_+		Full		0.01	1.0	μA

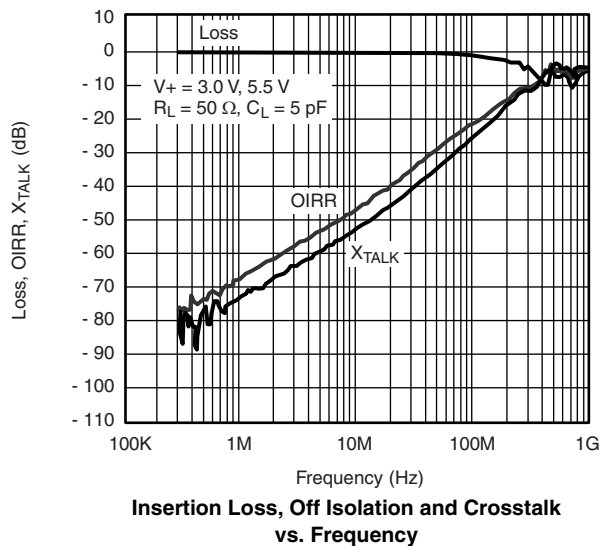
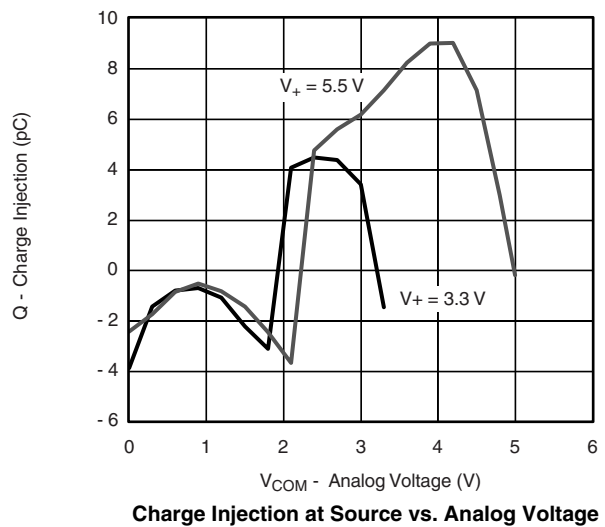
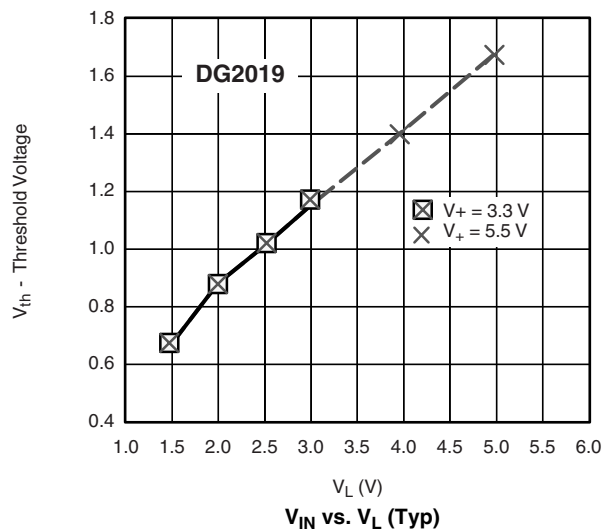
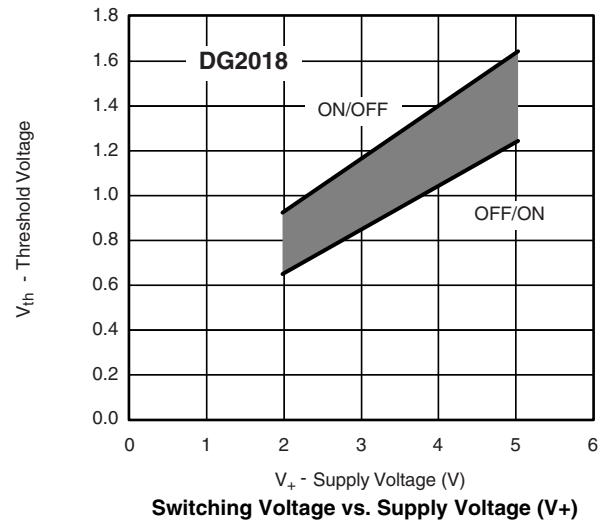
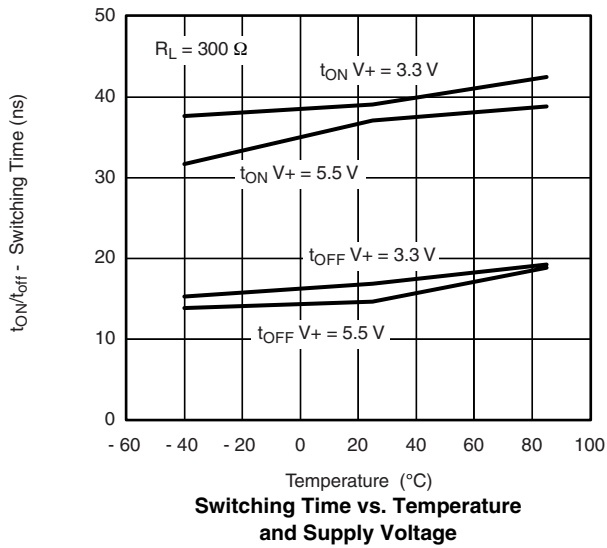
Notes:

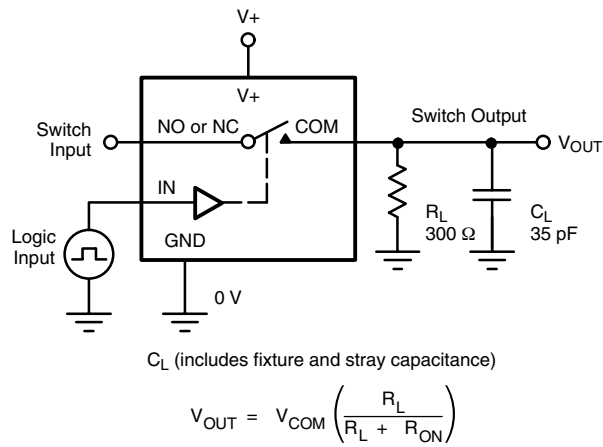
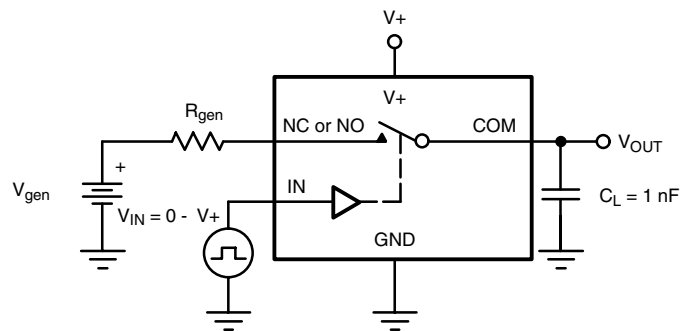
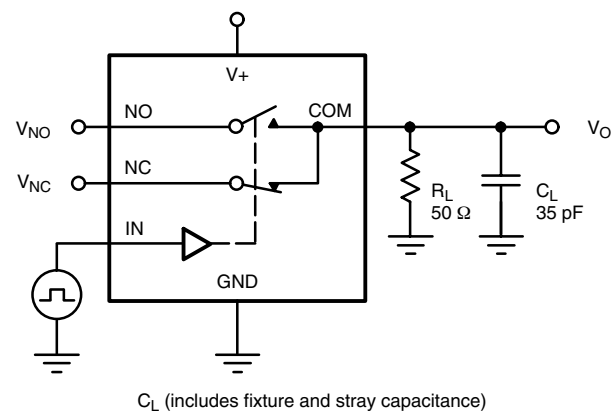
- a. Room = 25 °C, Full = as determined by the operating suffix.
b. Typical values are for design aid only, not guaranteed nor subject to production testing.
c. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
d. Guarantee by design, nor subjected to production test.
e. V_{IN} = input voltage to perform proper function.
f. Not production tested.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

 R_{ON} vs. V_{COM} and Supply Voltage

 R_{ON} vs. Analog Voltage and Temperature

Supply Current vs. Temperature

Supply Current vs. Input Switching Frequency

Leakage Current vs. Temperature

Leakage vs. Analog Voltage

TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted



TEST CIRCUITS

Figure 1. Switching Time

Figure 2. Charge Injection

Figure 3. Break-Before-Make Interval

TEST CIRCUITS

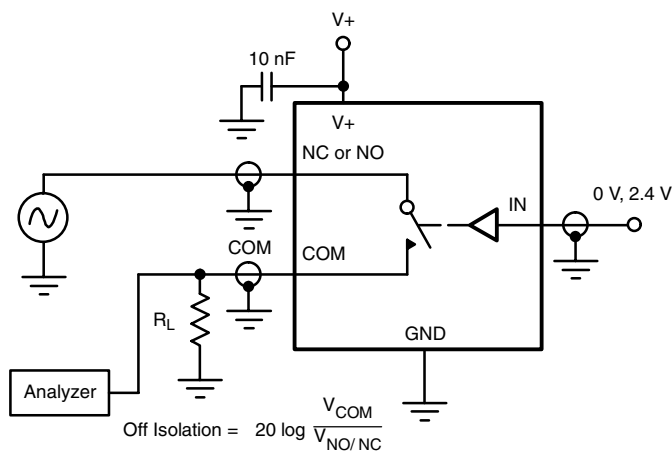


Figure 4. Off-Isolation

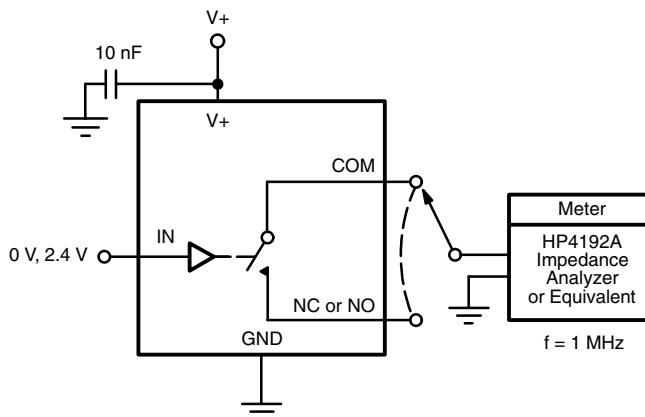


Figure 5. Channel Off/On Capacitance

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <http://www.vishay.com/ppg?72342>.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.