


## PIN HEADERS

- Industry Compatible
- Competitively priced
- Various plated contacts available
- 2.54mm pitch
- Various pin lengths available

## DUAL BODY SINGLE ROW

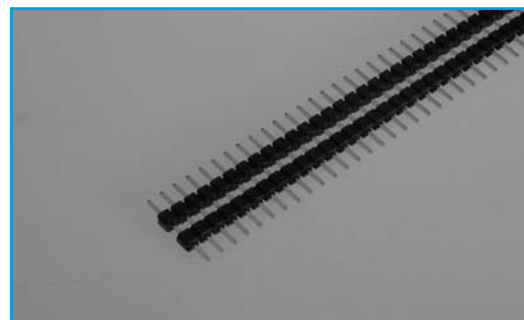

SECTION 8


## SPECIFICATION

### Material & Finish


<b>Contact Material:</b>	Brass
<b>Insulator Material:</b>	PBT & Glass-Fibre Reinforced UL94V-0
<b>Current Rating:</b>	1 A DC
<b>Contact Resistance:</b>	30M $\Omega$ Max at 6V DC 0.3A
<b>Insulator Resistance:</b>	1000M $\Omega$ Min at 500V DC
<b>Dielectric Withstanding Voltage:</b>	500V AC for One Minute

**Operating Temperature:** -40°C to + 105°C

## OUTLINE DRAWING

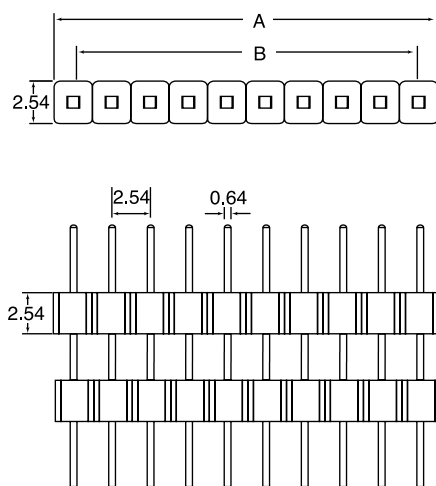

A	2.54 * Position No.
B	2.54 * (Position No.-1)



## ORDERING INFORMATION

DBC	PH	C19	32	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	No. of Ways	Contact Material	Contact Plating	Colour	Unique Special Code
			02= 2ways Thro to 40 = 40ways	A= Brass	G= Gold Flash T= Tin Plated S= Selective	1= Black	*See below

\*Dubilier will allocate a special code to distinguish the pins lengths E, F, H and G