

IDC

- Industry compatible
- Competitively priced
- Black or grey
- Long or short latch
- Gold plated contacts
- 2.54mm pitch

SHROUDED LATCHED HEADER - RIGHT ANGLED





SPECIFICATION

Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL-94V-0
Current Rating:	2 A DC
Contact Resistance:	30M Ω Max
Insulator Resistance:	3000M Ω Min
Dielectric Withstanding Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

Position	A	B	C	D	E
10	32.30	10.16	27.68	21.70	18.25
14	37.38	15.24	32.73	26.78	23.33
16	39.92	17.78	35.27	29.32	25.87
20	45.00	22.86	40.35	34.40	30.95
24	50.08	27.94	45.43	39.48	36.03
26	52.62	30.48	47.97	42.02	38.57
30	57.70	35.56	53.50	47.10	43.65
34	62.78	40.64	58.58	52.18	48.73
40	70.40	48.26	66.20	59.80	56.35
44	75.48	53.34	71.28	64.88	61.43
50	83.10	60.96	78.90	72.26	69.05
60	95.80	73.66	91.60	84.96	81.75
64	100.88	78.74	96.88	90.04	86.83

OUTLINE DRAWING

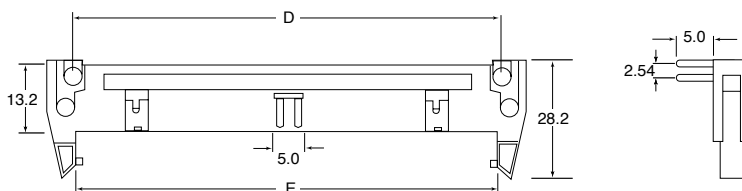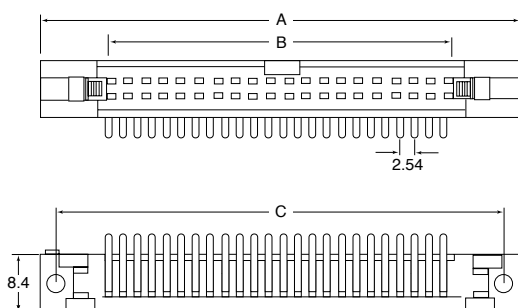

ORDERING INFORMATION

DBC	IDC	C2	10	A	S	A	1
Dubilier Connectors	IDC Connector	Series	N° of Ways	Contact Material	Contact Plating	Features	Colour
			10=10way	A=Brass	S=Selective Gold	A=Long Latch	1=Black
			14=14way		G= Gold Flash	B=Short Latch	2=Grey
			16=16way				
			20=20way				
			24=24way				
			26=26way				
			30=30way				
			34=34way				
			40=40way				
			44=44way				
			50=50way				
			60=60way				
			64=64way				