


FEMALE HEADERS

- Industry compatible
- Competitively priced
- Single or dual row
- No. of contacts 02-80
- Gold plated contacts
- 2.54mm pitch

FEMALE HEADERS RIGHT ANGLE - 8.4mm PROFILE

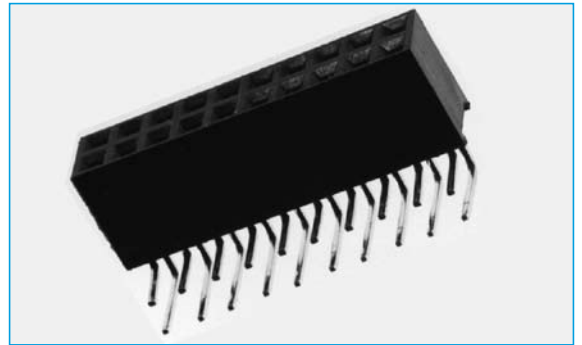

SECTION 8

SPECIFICATION



Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL-94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max
Insulator Resistance:	3000M Ω Min


Dielectric Withstanding

Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

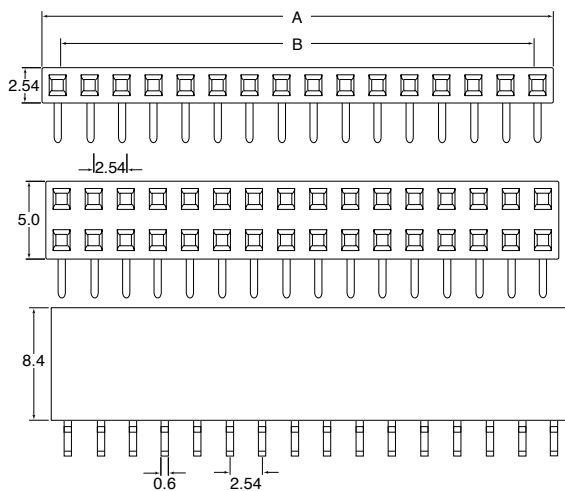

A = 2.54mm x N° of Contacts
B = (2.54mm x N° of Contacts) -1

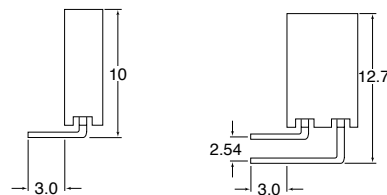

ORDERING INFORMATION

DBC	IDC	B7	S	04	A	G	1
Dubilier Connectors	IDC Connector	Series	N° of Rows	N° of Contacts/per row	Contact Material	Contact Plating	Colour
			S = Single Row D = Dual Row	02=2way Thro to 43=43way	A=Brass	G= Gold Flash	1=Black