

FEMALE HEADERS

- Industry compatible
- Competitively priced
- Single or dual row
- No. of contacts 02-80
- Selective Gold plated contacts
- 2.54mm pitch


SPECIFICATION

Material & Finish

Contact Material:	Phosphor Bronze
Insulator Material:	PBT & Glass-Fibre Reinforced UL-94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max
Insulator Resistance:	3000M Ω Min



Dielectric Withstanding

Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

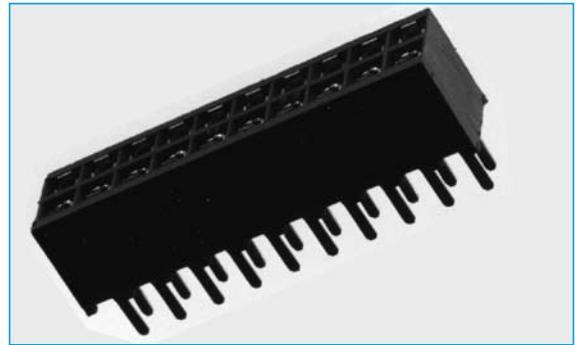

SECTION 8

OUTLINE DRAWING

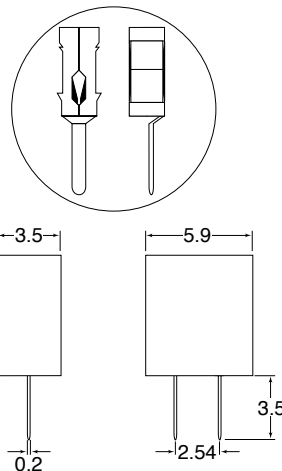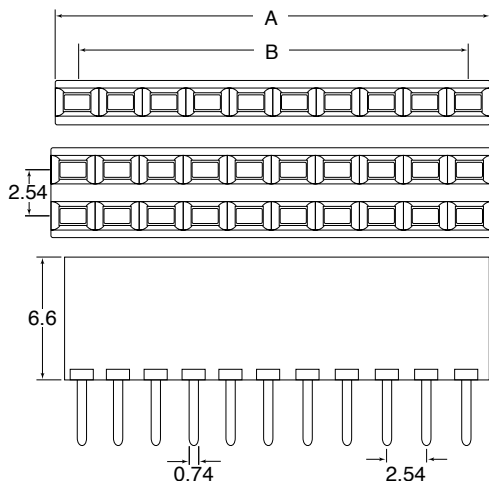

A = 2.54mm x N° of Contacts
B = (2.54mm x N° of Contacts) -1

ORDERING INFORMATION

DBC	IDC	B5	S	04	B	S	1
Dubilier Connectors	IDC Connector	Series	N° of Rows	N° of Contacts/per row	Contact Material	Contact Plating	Colour
			S = Single Row D = Dual Row	02=2way Thro to 45=45way	B=Bronze	S=Selective Plating	1=Black