

CTRJM Series

CHARACTERISTICS


Options: 1x2, 1x4, 1x6 & 1x8 Port
 Meets or exceeds IEEE 802.3 standard for 10/100 Base-TX
 350 μ H minimum OCL with 8mA DC bias current
 Available with or without LEDs
 Minimum 1500Vrms isolation per IEEE 802.3 requirement
 Operating temperature 0°C to +70°C
 Storage temperature -40°C to +85°C

RoHS Compliant

Transformer electrical specifications @ 25°C

MATERIAL SPECIFICATION

Metal Shell: Copper Alloy , Finish: 50 μ " Nickel
Housing: Thermoplastic , UL 94V-0, Color Black
Insert: Thermoplastic , UL 94V-0, Color Black
 Contact Terminal / Phosphor Bronze, 15 μ " Gold on Contact Area,
 100 μ " Tin on Solder, Both over 50 μ ", Nickel Under-Plated
Coil Base: Phenolic/LCP, UL 94V-0, Color Black

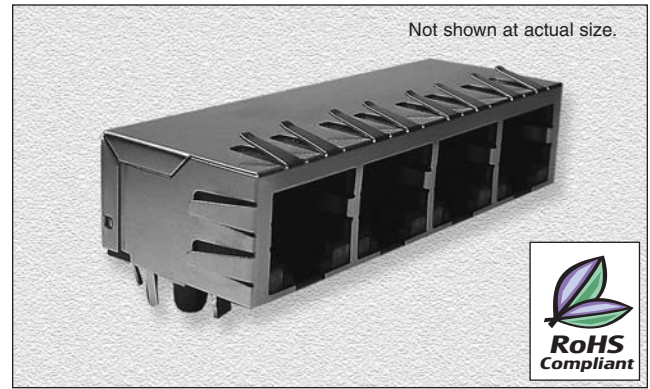

PART NUMBER CONFIGURATION

Series	Size Code	Layers	Port (Each Layer)	LED (L/R)	Tab	Schematic
CTRJM	22 26	S = Single	1 2 4 6 8	N = None G = Green Y = Yellow O = Orange	N = N/A D = Down U = Up	0811A, 0812A 0826A, 0811B 0812B, 0826B 0812C, 0826C

CTRJM 26 S 1 GY U 1001A

LED CONFIGURATION

Schematic	Standard LED	Wavelength (λ)	V / IF=20 mA		Image
			Max.	Typ.	
0811A 0812A 0826A	Yellow	585nm	2.5V	2.1V	Left LED: P9, P10 Right LED: P12, P11
	Green	570nm	2.5V	2.1V	
	Orange	605nm	2.5V	2.1V	
0811B 0812B 0826B	Yellow	585nm	2.5V	2.1V	Left LED: P9, P10 Right LED: P12, P11
	Green	570nm	2.5V	2.1V	
0812C 0826C	Yellow	585nm	2.5V	2.1V	Left LED: P12, P11 Right LED: P10, P9
	Green	570nm	2.5V	2.1V	
	Orange	605nm	2.5V	2.1V	

12.01.06

CTRJM Series

ORDERING INFO

Part Number	Turns Ratio TX/RX	EMI Fingers	LEDs (L/R)	Insertion Loss (dB max.)	Return Loss 100Ω ± 15Ω (dB min.)					Cross Talk (dB min.)				C.M.R. (dB min)		Hi-pot (Vrms) 60HZ/1 min.
					1-100 MHz	1-30 MHz	1-60 MHz	60-80 MHz	80-100 MHz	1-30 MHz	1-60 MHz	30-60 MHz	60-100 MHz	1-60 MHz	60-100 MHz	
CTRJM22S1NND0811A	1CT:1CT	NO	N/N	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1GYD0811A	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1GGD0811A	1CT:1CT	YES	G/G	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1YGD0811A	1CT:1CT	YES	Y/G	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1NND0812A	1CT:1CT	NO	N/N	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1GYD0812A	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1GGD0812A	1CT:1CT	YES	G/G	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1YGD0812A	1CT:1CT	YES	Y/G	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1NND0826A	1CT:1CT	NO	N/N	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1GYD0826A	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1GGD0826A	1CT:1CT	YES	G/G	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S1YGD0826A	1CT:1CT	YES	Y/G	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM22S2NND0811B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S2GYD0811B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S2NND0812B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S2GYD0812B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S2NND0826B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S2GYD0826B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S4NND0811B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S4GYD0811B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S4NND0812B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S4GYD0812B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S4NND0826B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S4GYD0826B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S6NND0811B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S6GYD0811B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S6NND0812B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S6GYD0812B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S6NND0826B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S6GYD0826B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S8NND0811B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S8GYD0811B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S8NND0812B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S8GYD0812B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S8NND0826B	1CT:1CT	YES	N/N	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM22S8GYD0826B	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-10	-40	-35	-	-30	-40	-30	1500	
CTRJM26S1NNU0812C	1CT:1CT	NO	N/N	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM26S1GYU0812C	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM26S1GGU0812C	1CT:1CT	YES	G/G	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM26S1YGU0812C	1CT:1CT	YES	Y/G	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM26S1NNU0826C	1CT:1CT	NO	N/N	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM26S1GYU0826C	1CT:1CT	YES	G/Y	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM26S1GGU0826C	1CT:1CT	YES	G/G	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	
CTRJM26S1YGU0826C	1CT:1CT	YES	Y/G	-1.0	-18	-16	-12	-	-40	-	-35	-30	-40	-30	1500	

12.01.06



Manufacturer of Passive and Discrete Semiconductor Components

800-684-5322 Inside US **949-453-1811** Outside US


Copyright © 2006 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice


CTRJM Series

SCHEMATICS


0811A

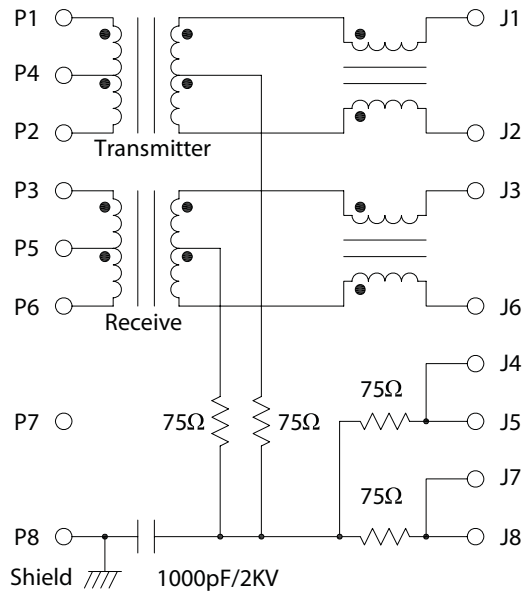


0812A

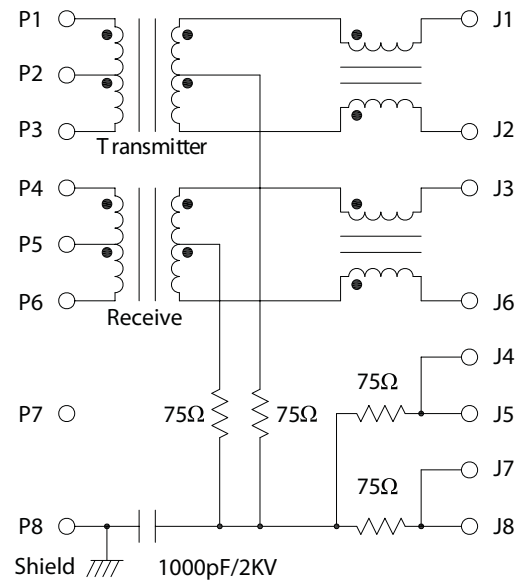

0826A

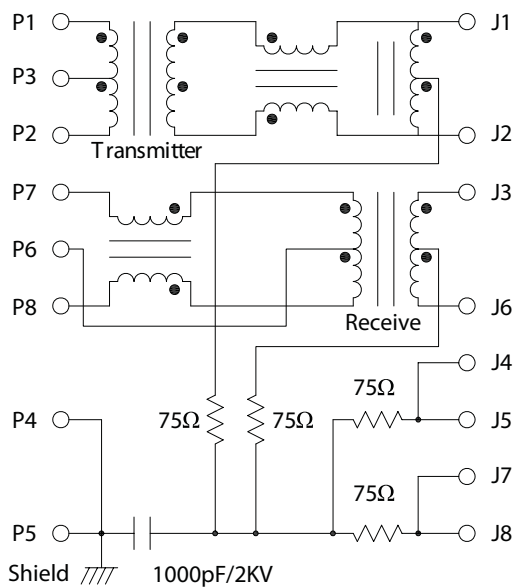

0811B

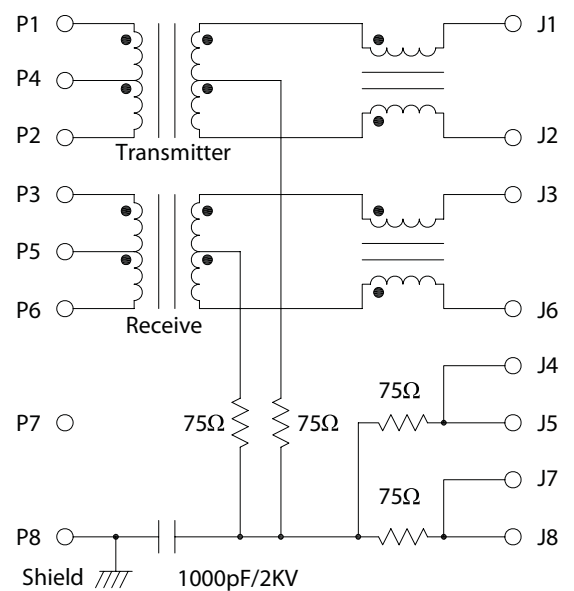


12.01.06


CTRJM Series

SCHEMATICS


0812B

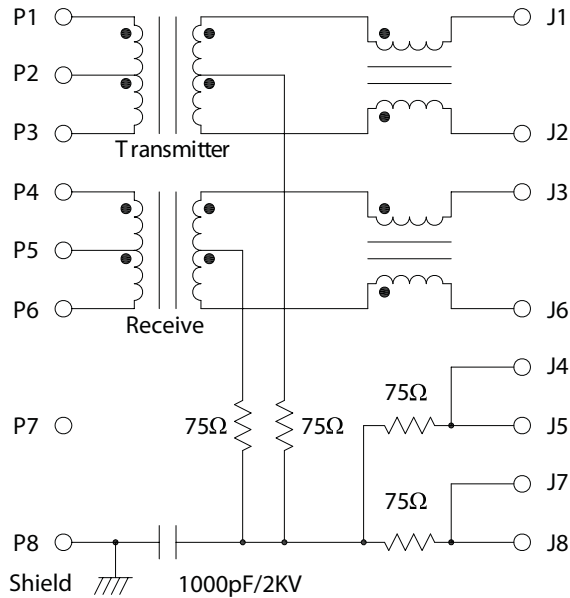


0826B

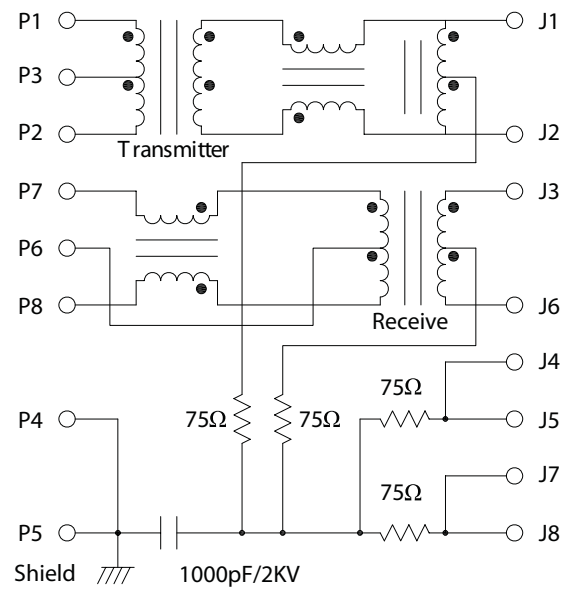

0812C

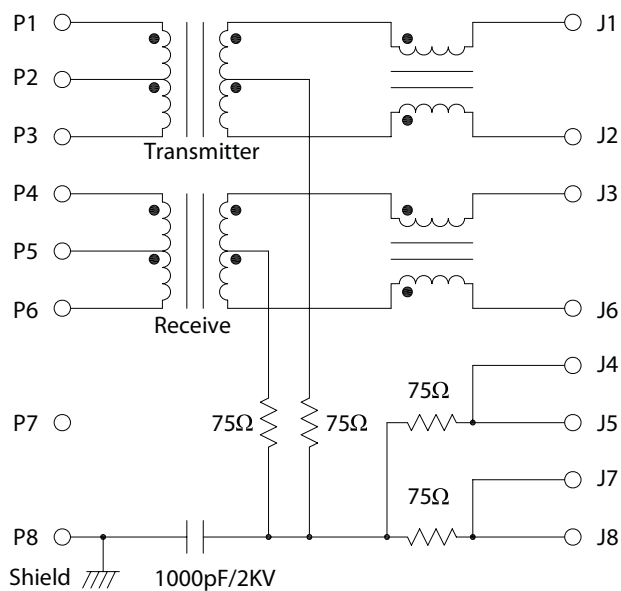

0826C

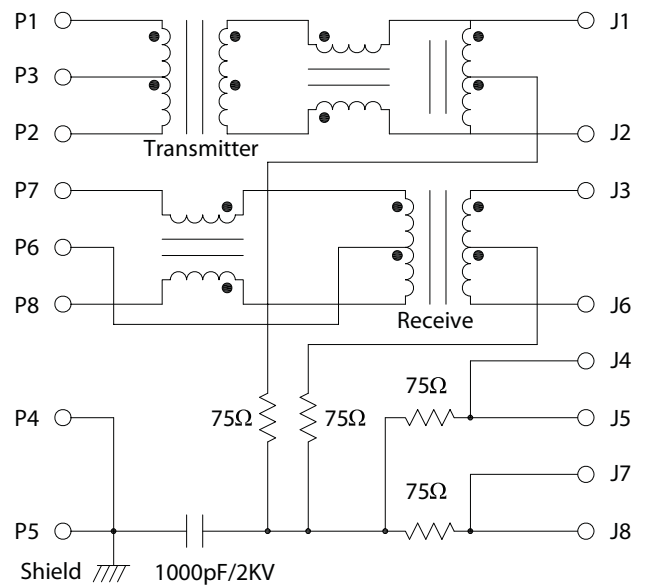


12.01.06

CTRJM Series

MECHANICAL


CTRJM22S1xxxxxxx

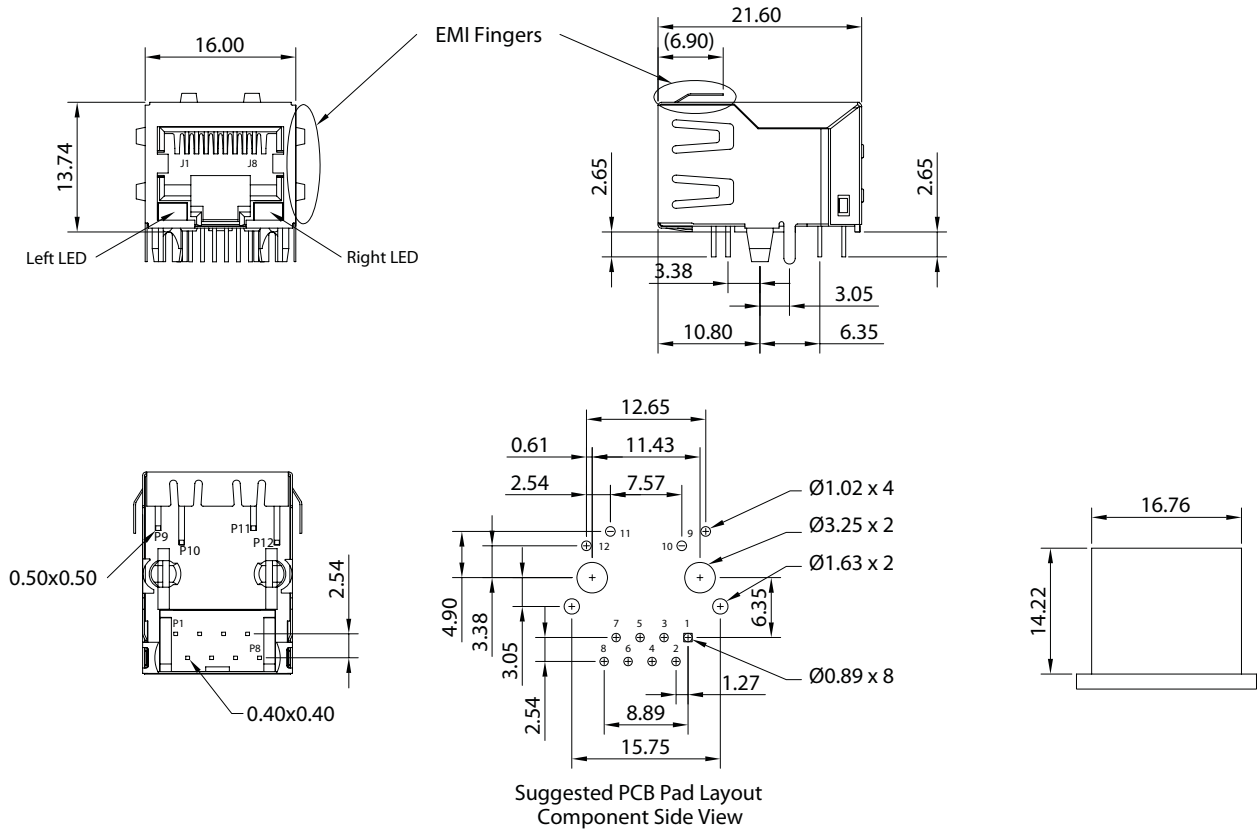


- NOTES : 1. Tolerance : PCB $\pm 0.05\text{mm}$
 Connector $\pm 0.25\text{mm}$
 2. Connector dimensions comply with FCC 68.5 dimension requirements

12.01.06


PANEL CUTOUT



NOTES : 1. Tolerance : PCB $\pm 0.05\text{mm}$
 Connector $\pm 0.25\text{mm}$
 2. Connector dimensions comply with FCC 68.5 dimension requirements

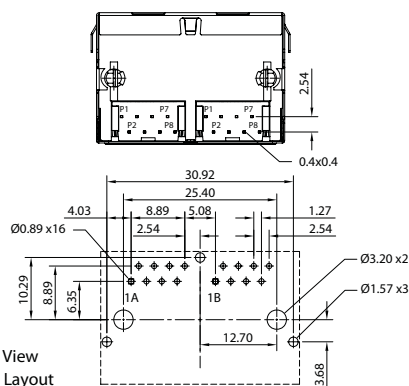

Component Side View
Suggested PCB Pad Layout


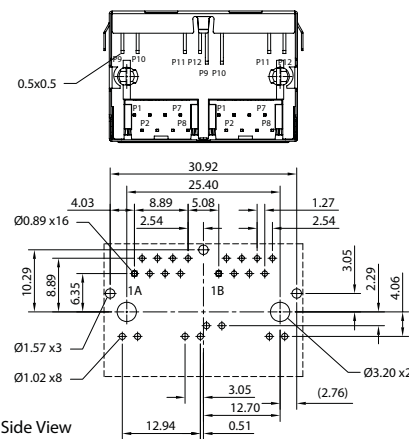


Component Side View
Suggested PCB Pad Layout

CTRJM Series



MECHANICAL

CTRJM22S4xxxxxx

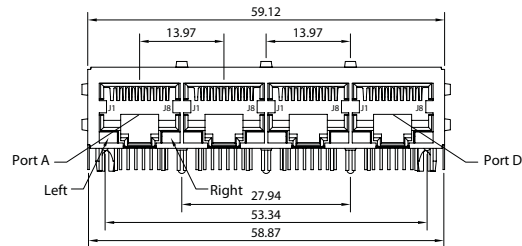



- NOTES : 1. Tolerance : PCB $\pm 0.05\text{mm}$
Connector $\pm 0.25\text{mm}$
2. Connector dimensions comply with FCC 68.5 dimension requirements

CTRJM22S4NNxxxxB

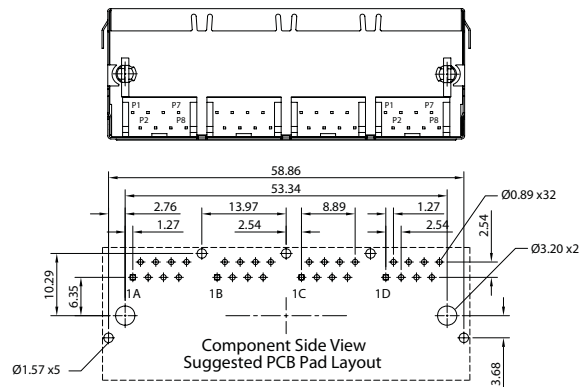

CTRJM22S4GYxxxxB

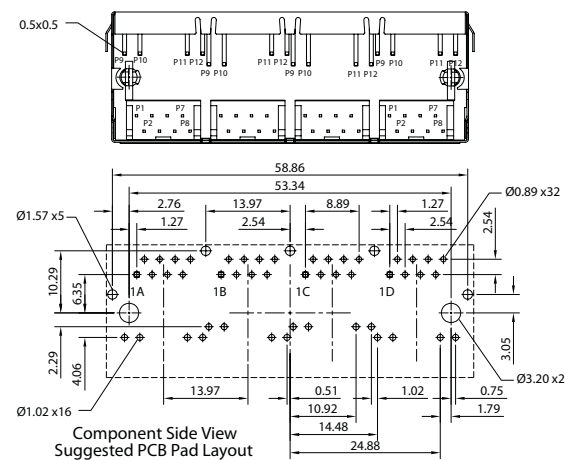



12.01.06

CTRJM Series



MECHANICAL

CTRJM22S6xxxxxxx

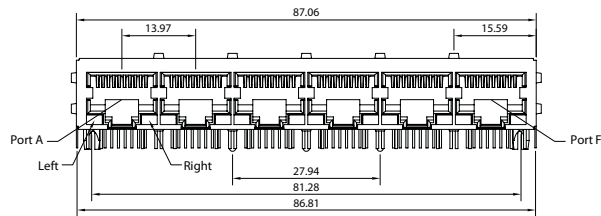



- NOTES : 1. Tolerance : PCB $\pm 0.05\text{mm}$
Connector $\pm 0.25\text{mm}$
2. Connector dimensions comply with FCC 68.5 dimension requirements

CTRJM22S6NNxxxxB

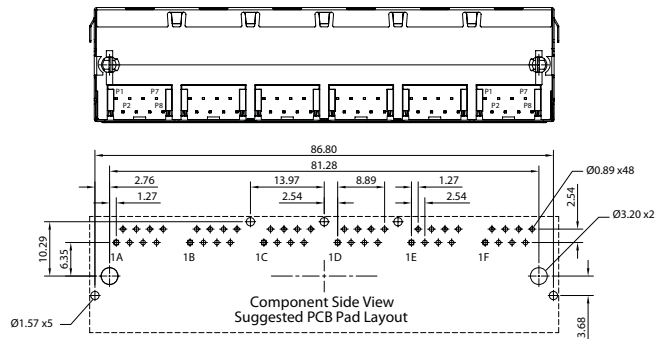

CTRJM22S6GYxxxxB

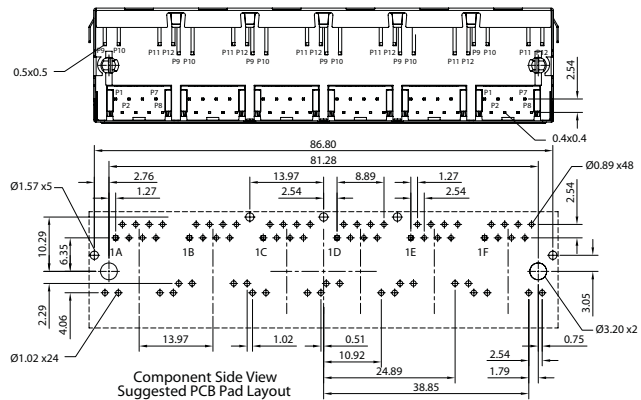


12.01.06

CTRJM Series


MECHANICAL

CTRJM22S8xxxxxx

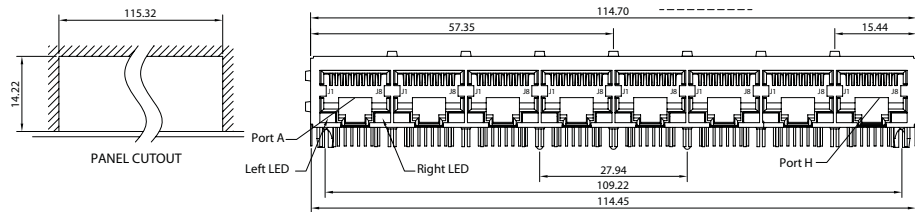


- NOTES : 1. Tolerance : PCB $\pm 0.05\text{mm}$
Connector $\pm 0.25\text{mm}$
2. Connector dimensions comply with FCC 68.5 dimension requirements

CTRJM22S8NNxxxxB

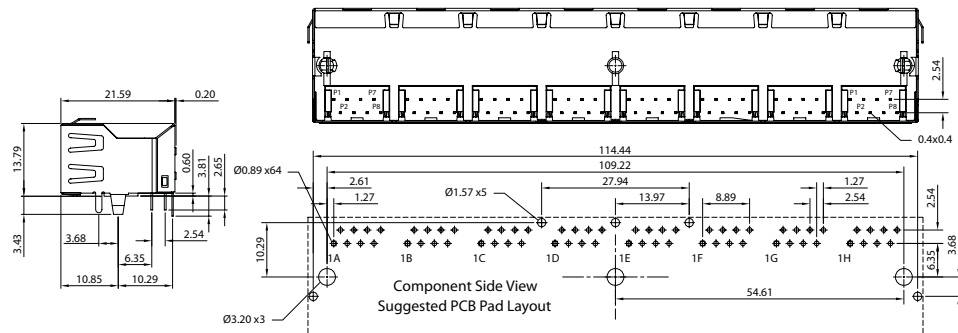

CTRJM22S8GYxxxxB

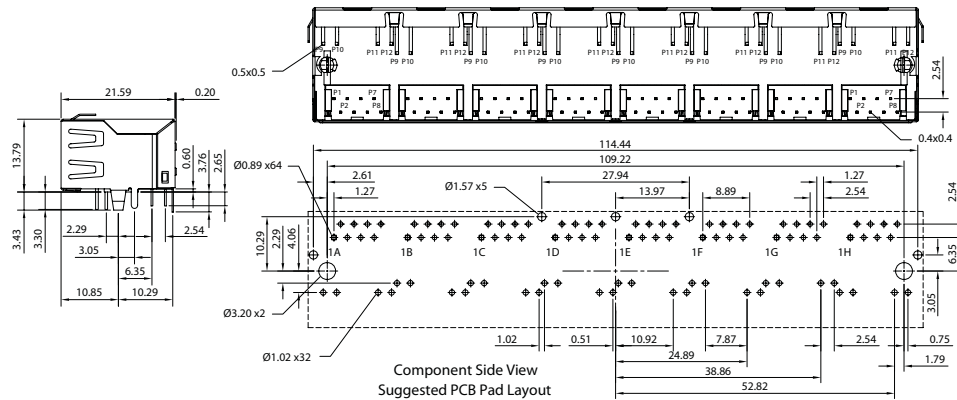


12.01.06

CTRJM Series

MECHANICAL

CTRJM26S1xxxxxxx

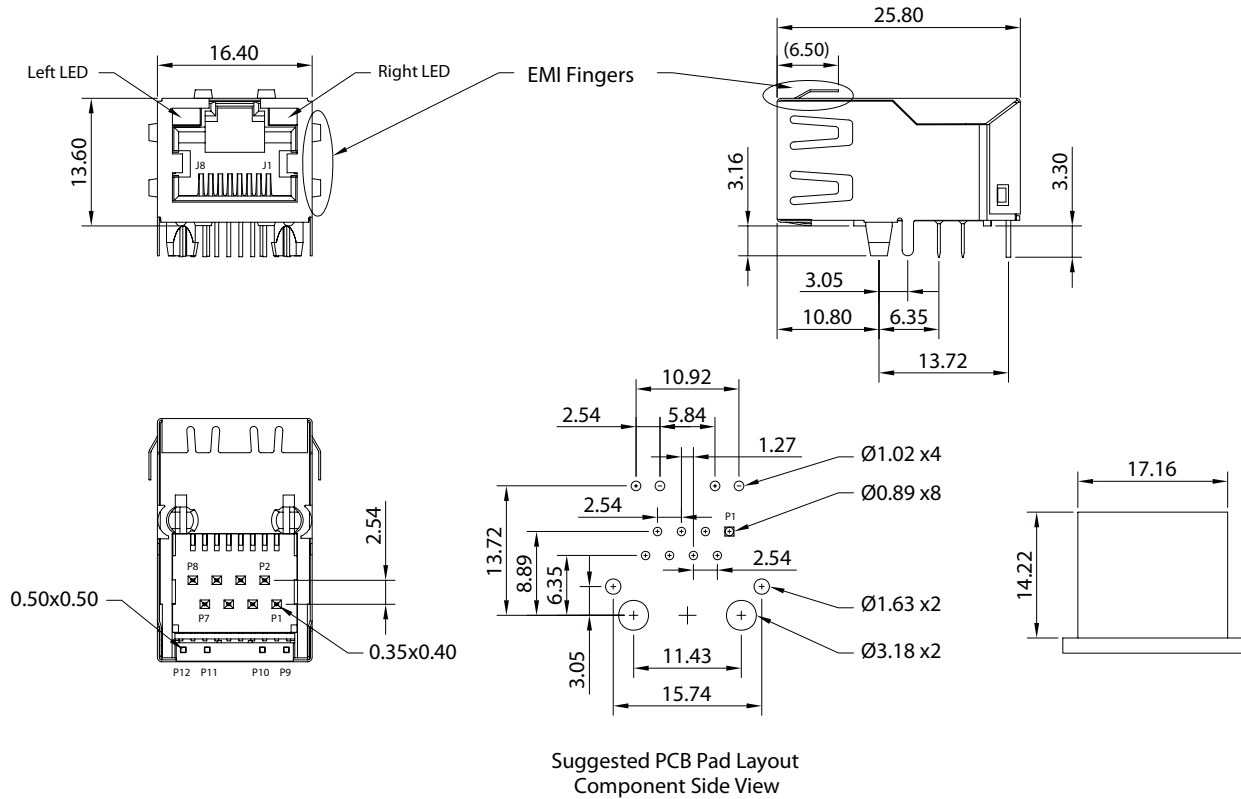

- NOTES : 1. Tolerance : PCB $\pm 0.05\text{mm}$
 Connector $\pm 0.25\text{mm}$
 2. Connector dimensions comply with FCC 68.5 dimension requirements

12.01.06