

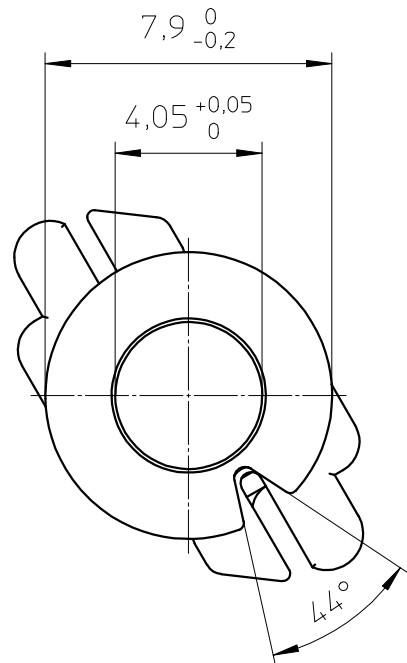
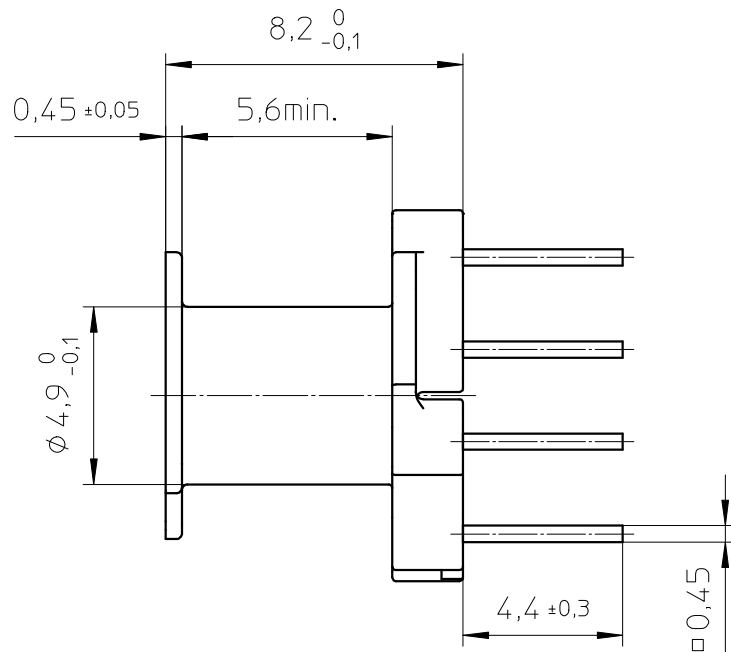
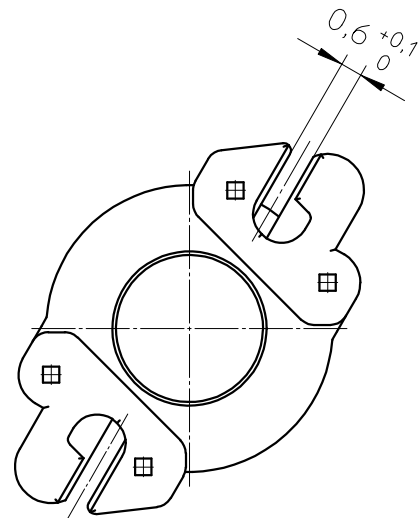





HOLE PATTERN:

ground points

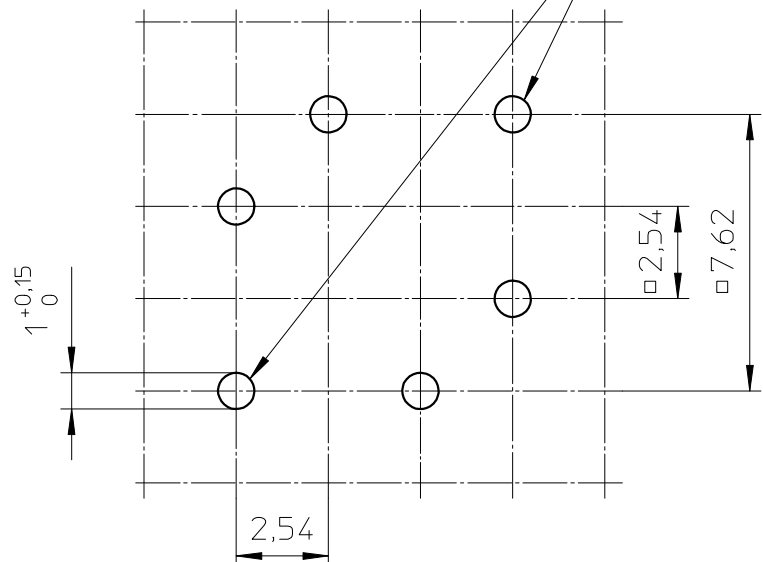

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429(M) - UL94V-0.

Pin material: Copper-clad steel, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 35s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s

Min. winding area: 7,8 mm².

Mean length of turn: 19,8 mm.



CLASS.NO.		CSV-RM4-1S-4P-TZ				4322 021 06471				2005-08-11					
										2005-09-15					
NAME NAAM		M.Veekens		SUPERS. VERV.		001		SH BL		112 - 001		069		A3	
MPA		CHECK CONTR.		DAT.		2005-08-11		Property of Eigendom van		© FERROXCUBE 2000					