

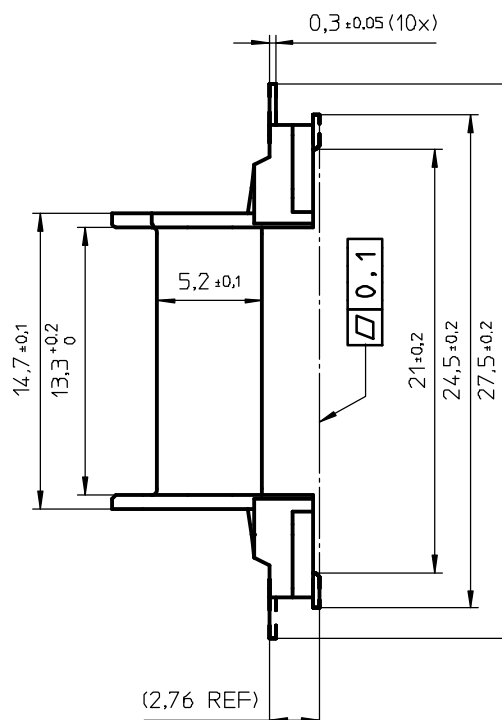
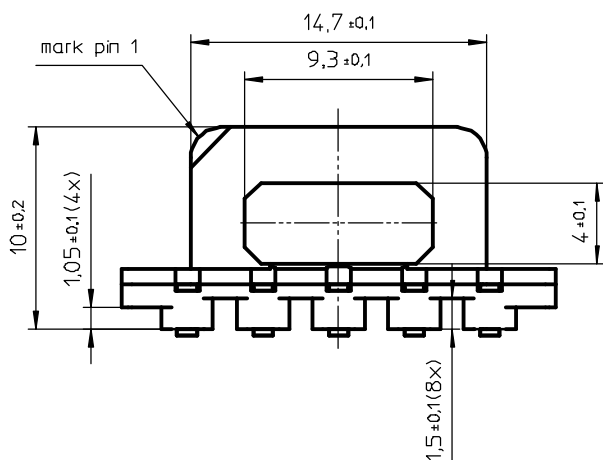


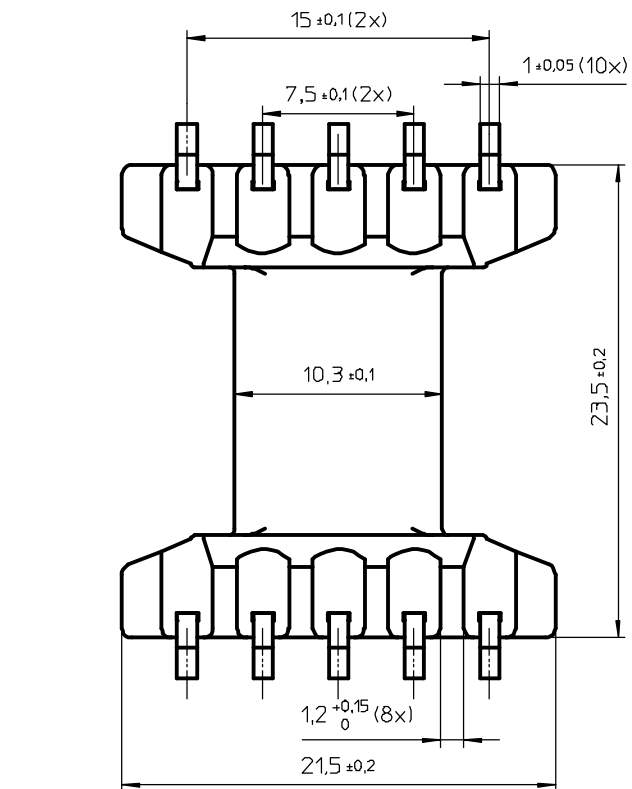

PROPOSED PAD ARRANGEMENT:

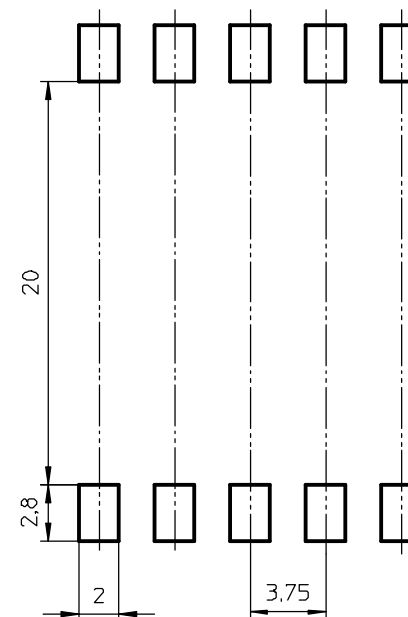

Coil former material:

Sumikon PM-9630 (PF), glass-reinforced,
UL file number E41429 - UL94V-0.

Pin material:

CuSn, Sn plated.

Max. operating temp.:

acc. to IEC 60085 class H, 180°C

Resistance to soldering heat:

acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5 s.

Solderability:


acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2s

Min. winding area:

27,2 mm²

Mean length of turn:

34,9 mm.



CLASS NO.		03-02-20	
CSHS-EFD20-1S-10P-Z		4322 021 06091	
NAME	J. Jon	SUPERS	001
VER.		VER.	112 - 001
MPA	CHECK	DAT.	03-02-20
CONTR.		069	
Property of		© FERROXCUBE 2000	
Eigenaar van		A3	