

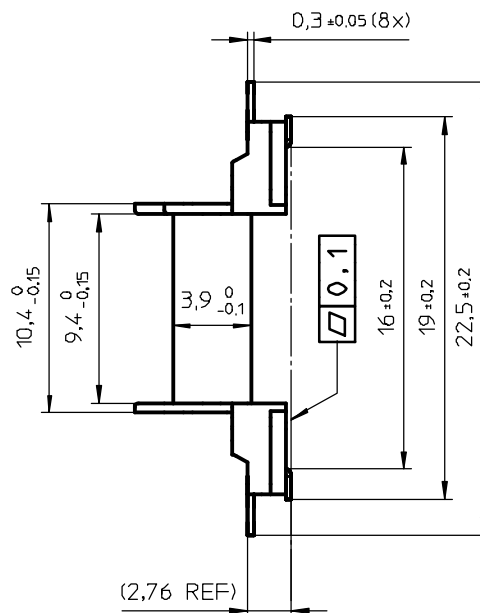
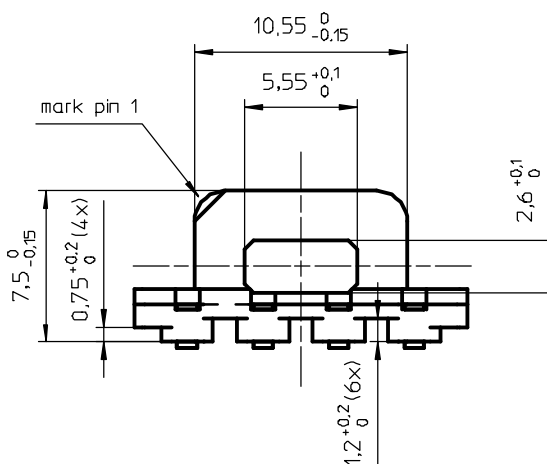


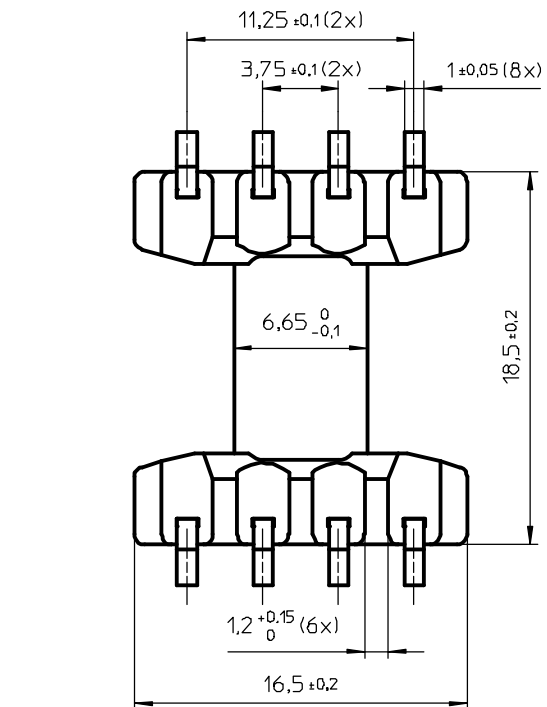

PROPOSED PAD ARRANGEMENT:

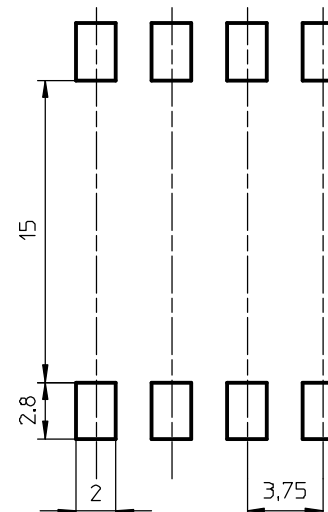

Coil former material: Sumikon PM-9630 (PF), glass-reinforced
UL file number E41429 - UL94V-0.

Pin material: CuSn, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class H, 180°C

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5 s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.

Min. winding area: 15,1 mm²

Mean length of turn: 24,1 mm.



CLASS NO.	CSHS-EFD15-1S-8P-ZA		4322 021 06081	03-02-20
NAME	J. Tjon	SUPERS	001	112 - 001
MAKING	CHECK	DATE	03-02-20	069
MPA	CONTR.	PROPERTY of	© FERROXCUBE 2000	A3