
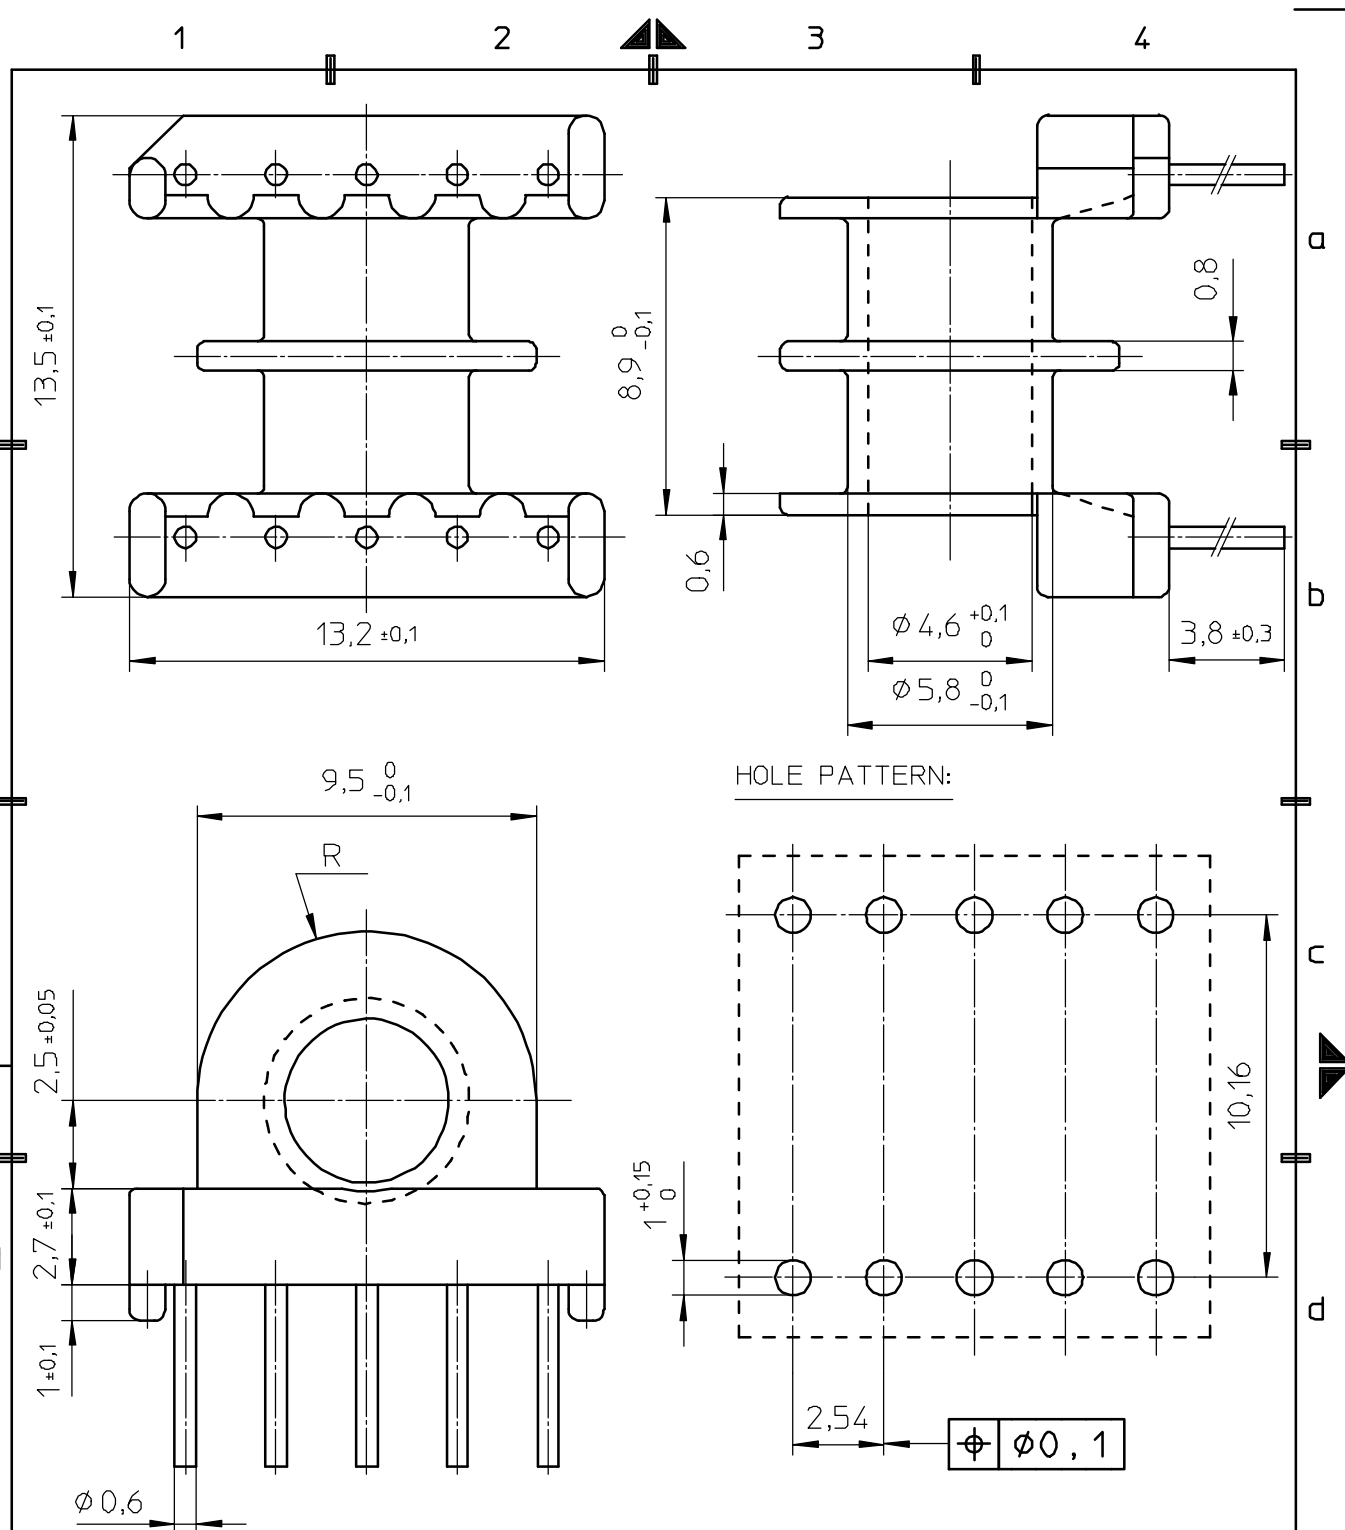





Coil former material: Sumikon PM9820 (PF), glass-reinforced.

UL file number: E41429 - UL94V-0.

Pin material: Copper-clad steel, Sn plated.

Max. operating temp.: 180°C.

Resistance to soldering heat: upto 500°C.

Solderability: IEC 60 068-2-20 Part 2, Test Ta, method 1.

Winding area: $12,6 \text{ mm}^2 \cdot (2 \times 6,3)$

Mean length of turn: 23,1mm.

CLASSNO.		CSH-EP13-2S-10P		4322 021 35061		92-06-25	
						94-02-22	
						99-10-06	
						2004-09-28	
NAME NAAM	M.Veekens	SUPERS. VERV.	1 SH SH 112 - 001		010		A4
MPA		CHECK CONTR	DAT.	92-06-25	Property of Eigendom van	© FERROXCUBE 2000	