



Parameter	Rating	Units
Breakdown Voltage - BV_{CEO}	30	V_P
Current Transfer Ratio	200	%
Saturation Voltage	0.5	V
Input Control Current	0.2	mA

Features

- Small 4-pin Package
- Low Drive Power Requirements (TTL/CMOS Compatible)
- No Moving Parts
- High Reliability
- Arc-Free With No Snubbing Circuits
- 5000V_{rms} Input/Output Isolation
- No EMI/RFI Generation
- Machine Insertable, Wave Solderable

Applications

- Sensor Circuitry
- Instrumentation
- Multiplexers
- Data Acquisition
- Electronic Switching
- I/O Subsystems
- Meters (Watt-Hour, Water, Gas)
- Medical Equipment: Patient/Equipment Isolation
- Aerospace
- Industrial Controls

Description

The CPC1303 is a unidirectional input optocoupler with a single-transistor output, which uses optically coupled technology to provide an enhanced 5000V_{rms} isolation barrier between the input and the output. The optically coupled output is controlled by a highly efficient GaAlAs infrared LED.

This optocoupler satisfies the PD output requirements of the CPC1466.


Approvals

- UL Pending
- EN/IEC 60950-1 Compliant
- CSA Certified Component: Certificate # 043639

Ordering Information

Part Number	Description
CPC1303G	4-Pin DIP (100/Tube)
CPC1303GR	4-Pin Surface Mount (100/Tube)
CPC1303GRTR	4-Pin Surface Mount (1000/Reel)

Pin Configuration



Absolute Maximum Ratings

Parameter	Ratings	Units
Breakdown Voltage	30	V_P
Reverse Input Voltage	5	V
Input Control Current	50	mA
Peak (10ms)	1	A
Power Dissipation ²		
Input ¹	150	mW
Phototransistor ²	150	
Isolation Voltage, Input to Output	5000	V_{rms}
Operating Temperature	-40 to +85	$^{\circ}C$
Storage Temperature	-40 to +125	$^{\circ}C$

¹ Derate Linearly 1.33 mW/ $^{\circ}C$

² Derate Linearly 2.00 mW/ $^{\circ}C$



Electrical absolute maximum ratings are at 25 $^{\circ}C$

Electrical Characteristics












Parameters	Conditions	Symbol	Min	Typ	Max	Units
Output Characteristics @ 25$^{\circ}C$						
Phototransistor Breakdown Voltage	$I_{CEO}=10\mu A$	BV_{CEO}	30	-	-	V_P
Phototransistor Output (Dark) Current	$V_{CEO}=5V, I_F=0mA$	I_{CEO}	-	25	500	nA
Saturation Voltage	$I_C=0.4mA, I_F=0.2mA$	V_{CEsat}	-	0.1	0.45	V
	$I_C=10mA, I_F=10mA$		-	0.12	0.5	V
Current Transfer Ratio	$I_F=0.2mA, V_{CE}=0.5V$	CTR	200	1000	2500	%
Output Capacitance	$V_{CEO}=25V, f=1MHz$	C_{OUT}	-	6	-	pF
Input Characteristics @ 25$^{\circ}C$						
Input Control Current	$I_C=0.4mA, V_{CE}=0.5V$	I_F	-	-	0.2	mA
Input Voltage Drop	$I_F=5mA$	V_F	0.9	1.2	1.4	V
Input Reverse Current	$V_R=5V$	I_R	-	-	10	μA
Common Characteristics @ 25$^{\circ}C$						
Input to Output Capacitance	-	$C_{I/O}$	-	3	-	pF

Switching Characteristics @ 25 $^{\circ}C$

Characteristic	Symbol	Test Condition	Typ	Units
Turn-On Time	t_{ON}	$V_{CC}=5V, I_F=1mA, R_L=500\Omega$	2	μs
Turn-Off Time	t_{OFF}		8	

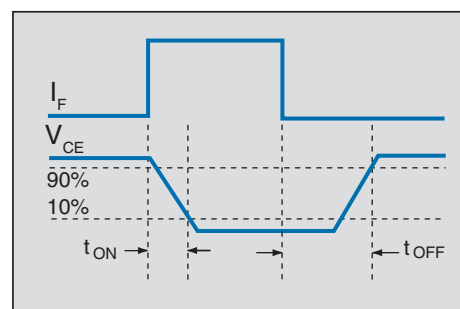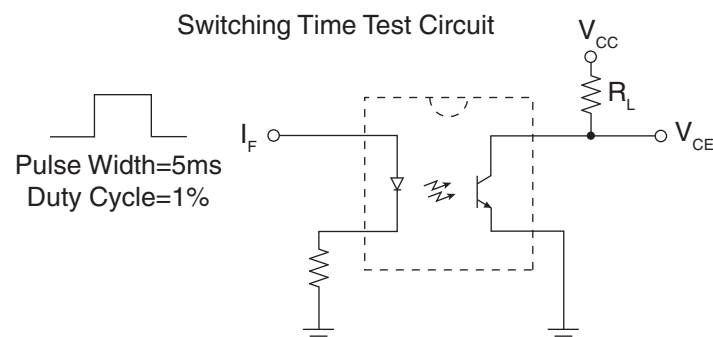

PERFORMANCE DATA*

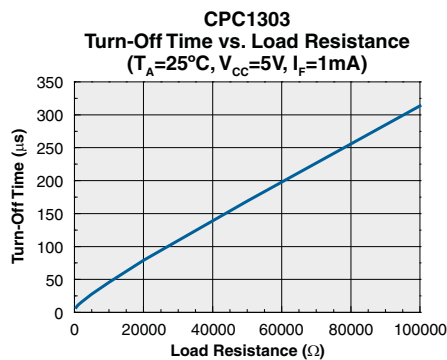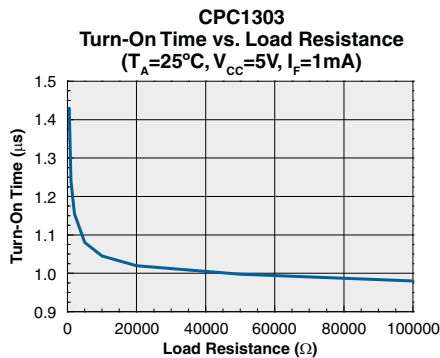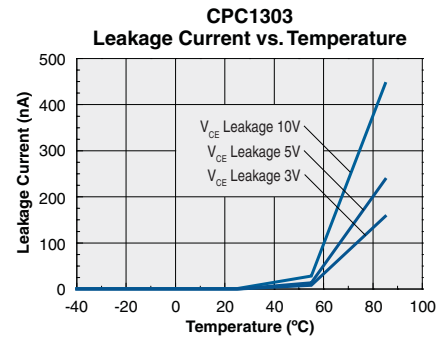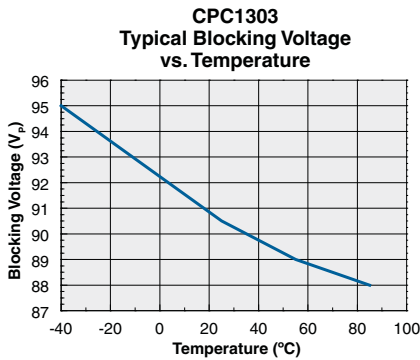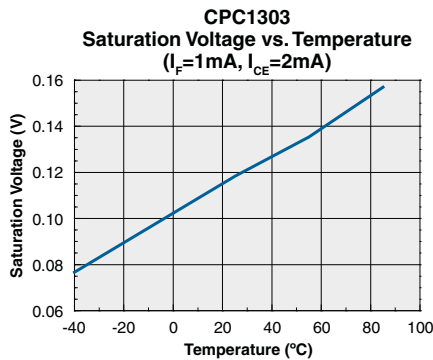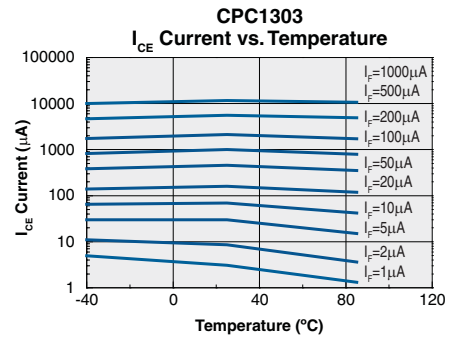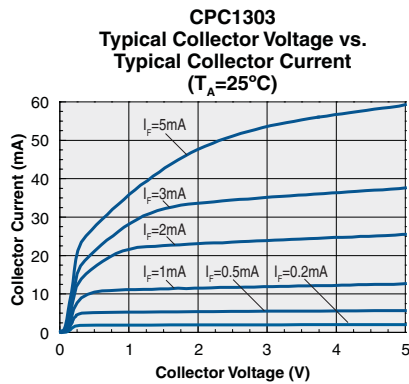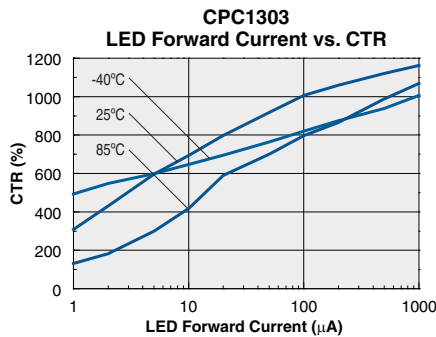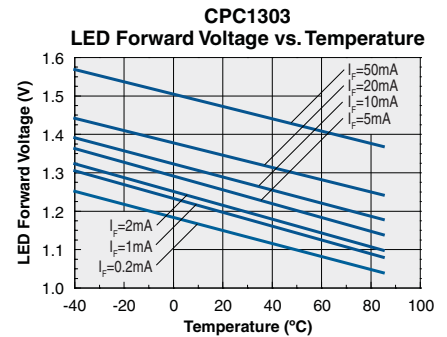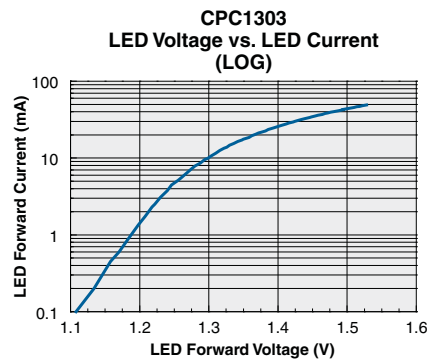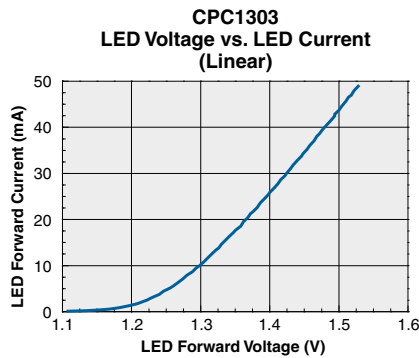

*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

Manufacturing Information

Soldering

For proper assembly, the component must be processed in accordance with the current revision of IPC/JEDEC standard J-STD-020. Failure to follow the recommended guidelines may cause permanent damage to the device resulting in impaired performance and/or a reduced lifetime expectancy.


Washing

Clare does not recommend ultrasonic cleaning or the use of chlorinated solvents.




MECHANICAL DIMENSIONS

4-Pin DIP ("G" Suffix)

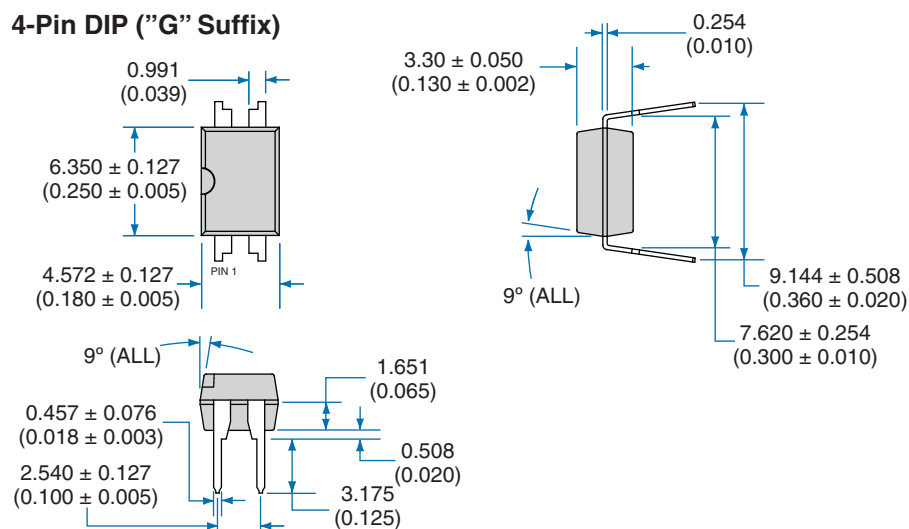


PC Board Pattern (Top View)

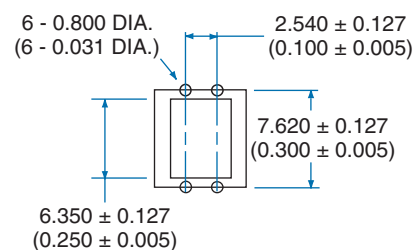


Dimensions
mm
(inches)

4-Pin Surface Mount ("GR" Suffix)



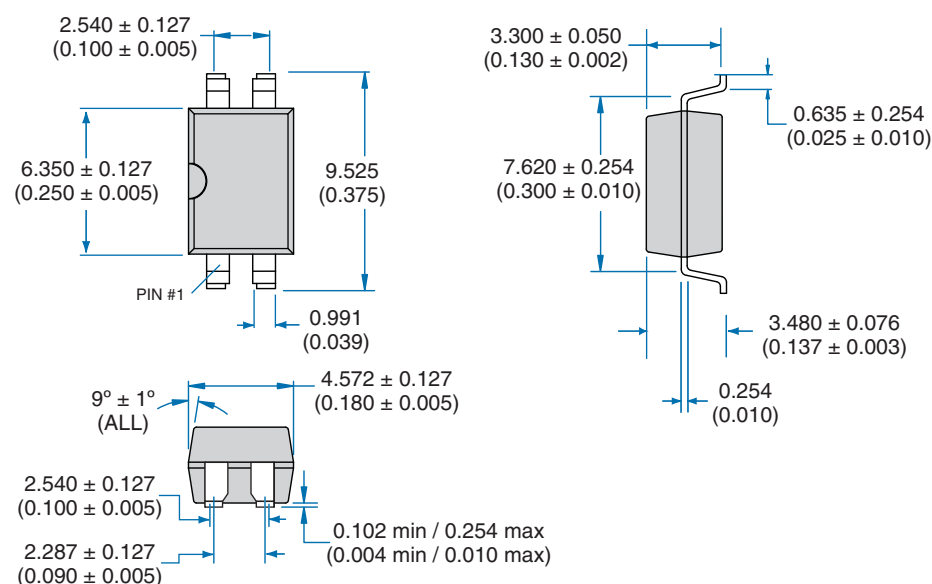


Recommended PCB Land Pattern



Dimensions
mm
(inches)

Tape and Reel Packaging for 4-Pin Surface Mount Package

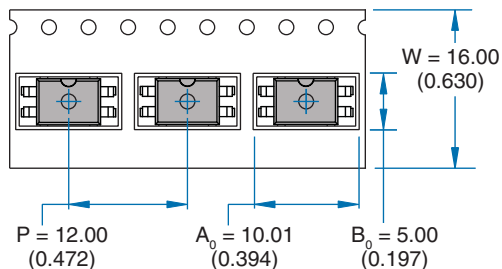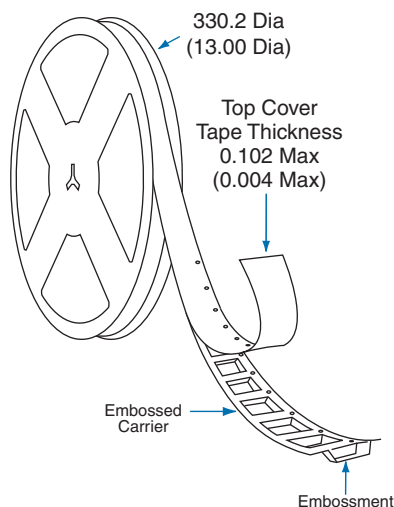

Dimensions
mm
(inches)

NOTE: Tape dimensions not shown comply with JEDEC Standard EIA-481-2

For additional information please visit our website at: www.clare.com

Clare, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in Clare's Standard Terms and Conditions of Sale, Clare, Inc. assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of Clare's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. Clare, Inc. reserves the right to discontinue or make changes to its products at any time without notice.