



Fixed Frequency

- Low cost
- Standard Waveguide output
- Rugged, Reliable Construction
- Low Power Consumption
- High Sensitivity

The MDU (Motion Detector Unit) is an X-Band microwave transceiver that utilizes the Doppler shift phenomenon to "sense" motion.

Applications

- Traffic Control
- Automatic Door Openers
- Speed Measurement
- Direction of motion detection
- Energy Management Systems
- Sports Radar Guns

This document only gives a general description of the product and shall not form part of any contract. Microwave Solutions pursue a policy of continuous product improvement and reserve the right from time to time to amend the specifications of products.

MDU19xx Series

Operation

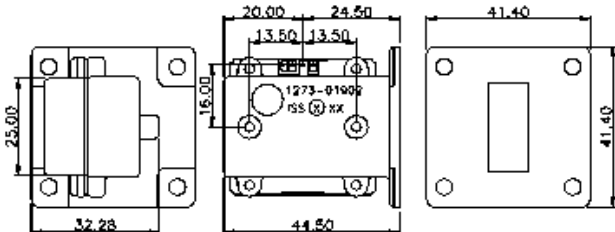
The basic principle of operation consists of detecting the frequency shift between a transmitted and a received signal reflected back from a moving object within the field of view of the unit.

The MDU1900 unit produces two low level output signals which can be amplified and processed to provide an audible or visual alarm. These signals are nominally orthogonal in phase and the direction of the detected target can be ascertained from the lead/lag between the two outputs

The MDU1910 unit produces a single low level output signal which can be amplified and processed to provide an audible or visual alarm.

The MST1950 unit includes the transmitter only and can be used with a separate receiver as one end of a microwave link.

All the units employ low cost surface mount manufacturing techniques which are field proven as being rugged

<u>Electrical Characteristics</u> <u>Transmitter</u> Operating Voltage : +5V ±0.25V Operating Current (CW) : 60mA max. : 50mA typ. Frequency : see table Frequency Setting Accuracy : 3MHz Frequency Pushing (Max) : 3MHz/V Power Output MDU1900/MDU1910 : +7dBm (Typ) MDU1900/MDU1910 : +10dBm (Typ) Power Variation : 3dB/v (Max) Harmonic Emissions : < -7dBm <u>Pulse Mode Operation</u> Average Current (5% DC) : 2mA typ. Pulse Width (Min.) : 5µSec Duty Cycle (Min.) : 1% <u>Receiver</u> Output Signal* : >1000µV p-p Noise : <150µV p-p (Both in 3Hz to 80Hz bandwidth) * With standard test system <u>Output Connection</u> Waveguide : WG16 WR90/R100 Waveguide Flange : UBR100			<u>Mechanical Characteristics</u> Weight : 85 grams Tab Connections : 0.1" spacing <u>Environmental Characteristics</u> Power Drift (over operating temp. range) : 3dB Frequency Drift (over operating temp. range) : 10MHz Operating Temperature : -10°C to +55°C Storage Temperature : -30°C to +70°C NOTES Detection range is dependent on size and reflectivity of target and S/N ratio Doppler shift at 10.587GHz is 31Hz/m.p.h. Unit functions over -30°C to +70°C with reduced performance		
			<u>Outline Drawing</u> 		
<u>Model</u>	<u>Application</u>	<u>Order Code</u>	<u>Frequency</u>	<u>Comments</u>	
MDU1900	Dual Orthogonal Mixers	C950503 C950501	10.525GHz 10.587GHz	Holland, Belgium, Italy, USA UK	
MDU1910	Single Mixer	C960503 C960501	10.525GHz 10.587GHz	Holland, Belgium, Italy, USA UK	
MST1950	Transmit Only	C970503 C970501	10.525GHz 10.587GHz	Holland, Belgium, Italy, USA UK	