


Thyristor/Diode and Thyristor/Thyristor, 27A (ADD-A-PAK Power Modules)



ADD-A-PAK


FEATURES

- High voltage
- Electrically isolated by DBC ceramic (Al_2O_3)
- 3000 V_{RMS} isolating voltage
- Industrial standard package
- High surge capability
- Glass passivated chips
- Modules uses high voltage power thyristor/diodes in two basic configurations
- Simple mounting
- UL approved file E320098 
- Compliant to RoHS 
- Designed and qualified for multiple level

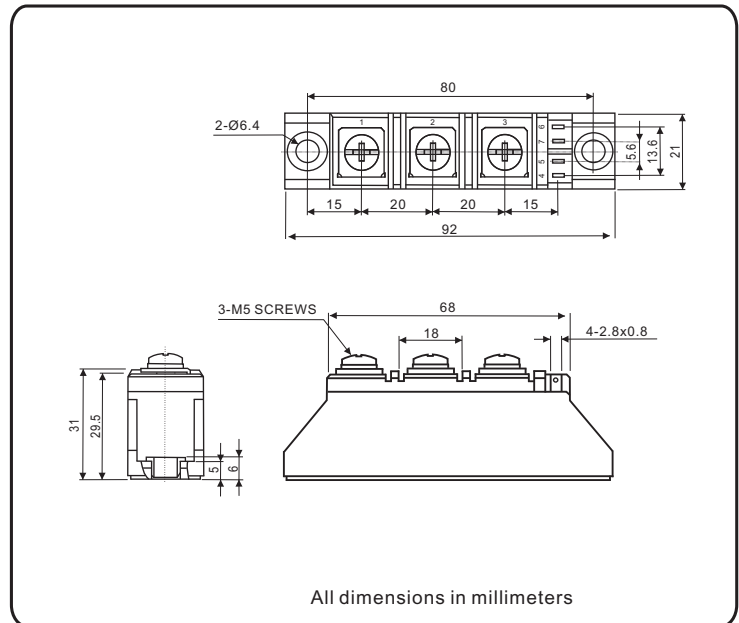

APPLICATIONS

- DC motor control and drives
- Battery charges
- Welders
- Power converters
- Lighting control
- Heat and temperature control

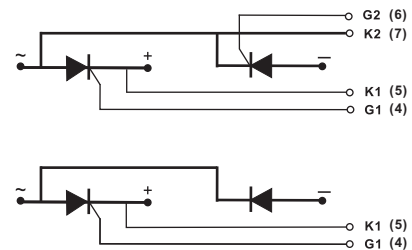

NKT

NKH

PRODUCT SUMMARY

$I_{T(AV)}$	27 A
-------------	------

MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	VALUE	UNITS
$I_{T(AV)}$	85 °C	27	A
$I_{T(RMS)}$	85 °C	60	A
I_{TSM}/I_{FSM}	50 Hz	520	
	60 Hz	546	kA^2s
I^2t	50 Hz	1.35	
	60 Hz	1.23	$\text{kA}^2\sqrt{\text{s}}$
$I^2\sqrt{t}$		13.5	
$V_{\text{DRM}} / V_{\text{RRM}}$	Range	400 to 1600	V
T_J	Range	-40 to 125	°C

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V_{RRM}/V_{DRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V_{RSM}/V_{DSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I_{RRM}/I_{DRM} AT 125 °C mA
NKT26..A NKH26..A	04	400	500	8
	08	800	900	
	12	1200	1300	
	14	1400	1500	
	16	1600	1700	

FORWARD CONDUCTION							
PARAMETER	SYMBOL	TEST CONDITIONS			VALUE	UNITS	
Maximum average on-state current at case temperature	I _{T(AV)}	180° conduction, half sine wave ,50Hz			27	A	
					85	°C	
Maximum RMS on-state current	I _{T(RMS)}	180° conduction, half sine wave ,50Hz ,T _C = 85°C			60	A	
Maximum peak, one-cycle, on-state non-repetitive surge current	I _{TSM}	t = 10 ms	No voltage reappplied	Sine half wave, initial T _J = T _J maximum	520		
		t = 8.3 ms			546		
Maximum I ² t for fusing	I ² t	t = 10 ms	100% V _{RRM} reappplied		1.35		kA ² s
		t = 8.3 ms			1.23		
		t = 10 ms			0.95		
		t = 8.3 ms		0.86			
Maximum I ² √t for fusing	I ² √t	t = 0.1 ms to 10 ms, no voltage reappplied			13.5	kA ² √s	
Maximum on-state voltage drop	V _{TM}	I _{TM} =80A , T _J = 25 °C, 180° conduction			1.6	V	
Maximum forward voltage drop	V _{FM}	I _{FM} =80A, T _J = 25 °C, 180° conduction			1.3		
Maximum holding current	I _H	Anode supply = 6 V,resistive load T _J = 25 °C			150	mA	
Maximum latching current	I _L	Anode supply = 6 V resistive load, T _J = 25 °C			400		

BLOCKING				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum peak reverse and off-state leakage current	I_{RRM} I_{DRM}	$T_J = 125^{\circ}\text{C}$	8	mA
RMS isolation Voltage	V_{ISO}	50 Hz, circuit to base, all terminals shorted	2500 (1min) 3000 (1s)	V
Critical rate of rise of off-state voltage	dV/dt	$T_J = T_J$ maximum, exponential to 67 % rated V_{DRM}	500	V/ μs

TRIGGERING					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum peak gate power	P _{GM}	t _p ≤ 5 ms, T _J = T _J maximum		10	W
Maximum average gate power	P _{G(AV)}	f = 50 Hz, T _J = T _J maximum		3	
Maximum peak gate current	I _{GM}	t _p ≤ 5 ms, T _J = T _J maximum		3	A
Maximum peak negative gate voltage	- V _{GT}			10	V
Maximum required DC gate voltage to trigger	V _{GT}	T _J = 25 °C	Anode supply = 6 V, resistive load; R _a = 1 Ω	0.7~1.5	
Maximum required DC gate current to trigger	I _{GT}			20~100	mA
Maximum gate voltage that will not trigger	V _{GD}	T _J = T _J maximum, 66.7% V _{DRM} applied		0.25	V
Maximum gate current that will not trigger	I _{GD}			10	mA
Maximum rate of rise of turned-on current	dI/dt	T _J = 25°C ,I _{GM} = 1.5A ,t _r ≤ 0.5 μs		150	A/μs

THERMAL AND MECHANICAL SPECIFICATIONS					
PARAMETER		SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum junction operating temperature range		T _J		- 40 to 125	°C
Maximum storage temperature range		T _{Stg}		- 40 to 150	
Maximum thermal resistance, junction to case per junction		R _{thJC}	DC operation	0.7	°C/W
Maximum thermal resistance, case to heatsink per module		R _{thCS}	Mounting surface, smooth , flat and greased	0.19	
Mounting torque ± 10 %	AAP to heatsink, M6 busbar to AAP, M5		A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.	4	N.m
Approximate weight				120	g
				4.23	oz.
Case style				ADD-A-PAK	

ORDERING INFORMATION TABLE

Device code

NK	T	26	/	16	A
①	②	③		④	⑤

- ① - Module type
- ② - Circuit configuration
- ③ - Current rating: $I_{T(AV)}$
- ④ - Voltage code $\times 100 = V_{RRM}$
- ⑤ - Assembly type, "A" for soldering type

Fig.1 Peak On-state Voltage vs. Peak On-state Current

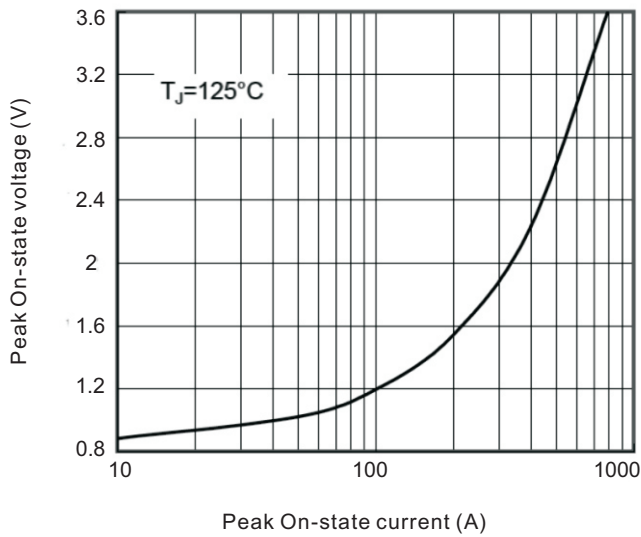


Fig.2 Max. Junction To case Thermal Impedance Vs. Time

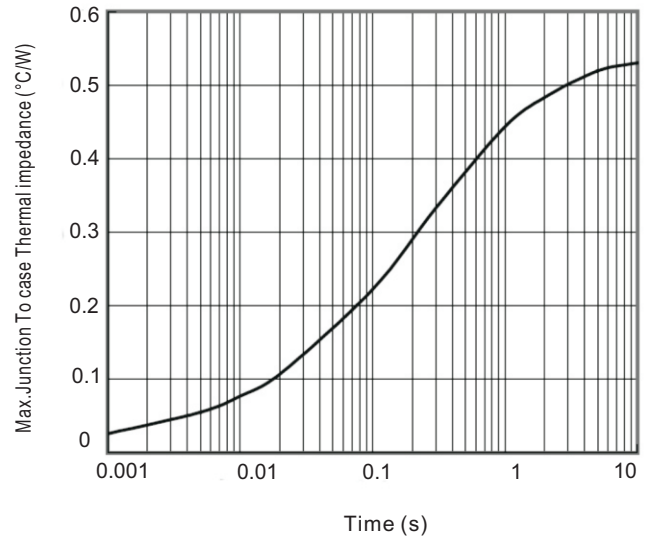


Fig.3 Power Dissipation Vs. Average On-state Current

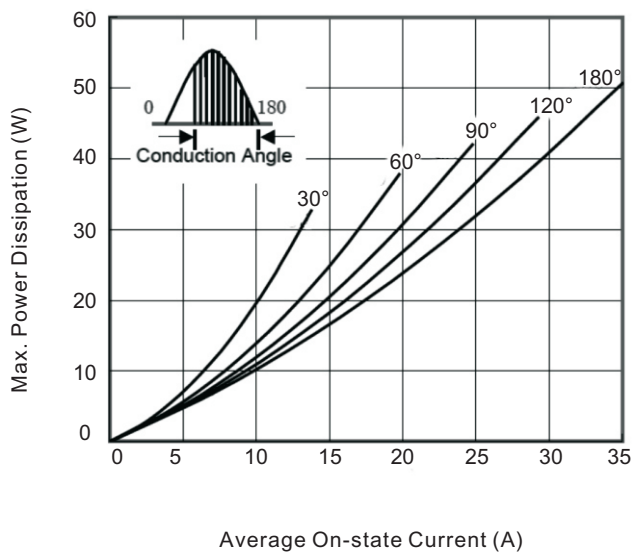


Fig.4 Case Temperature Vs. Average On-state Current

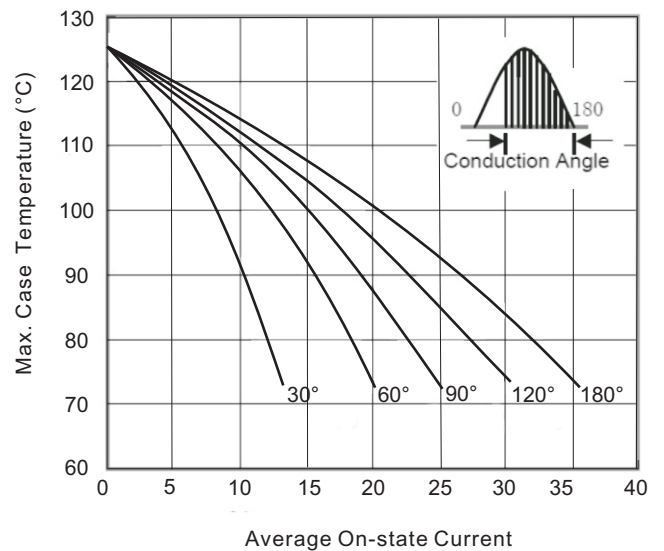


Fig.5 Surge On-state Current Vs. Cycles

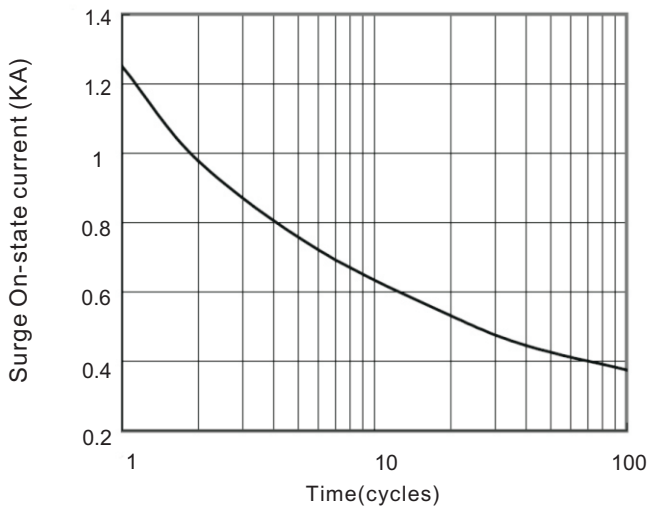


Fig.6 Gate characteristics

