

ISC Silicon NPN Power Transistor

BUW132H

DESCRIPTION

- High Switching Speed
- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)}=450V$

APPLICATIONS



- Designed for use in very fast switching applications in inductive circuits.

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	MAX	UNIT
V_{CES}	Collector- Emitter Voltage ($V_{BE}=0$)	850	V
V_{CEO}	Collector-Emitter Voltage	450	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	8	A
I_{CM}	Collector Current-Peak	16	A
I_B	Base Current	6	A
I_{BM}	Base Current-Peak	12	A
P_C	Collector Power Dissipation @ $T_c=25^{\circ}C$	125	W
T_j	Junction Temperature	200	$^{\circ}C$
T_{stg}	Storage Temperature Range	-65~200	$^{\circ}C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.0	$^{\circ}C/W$

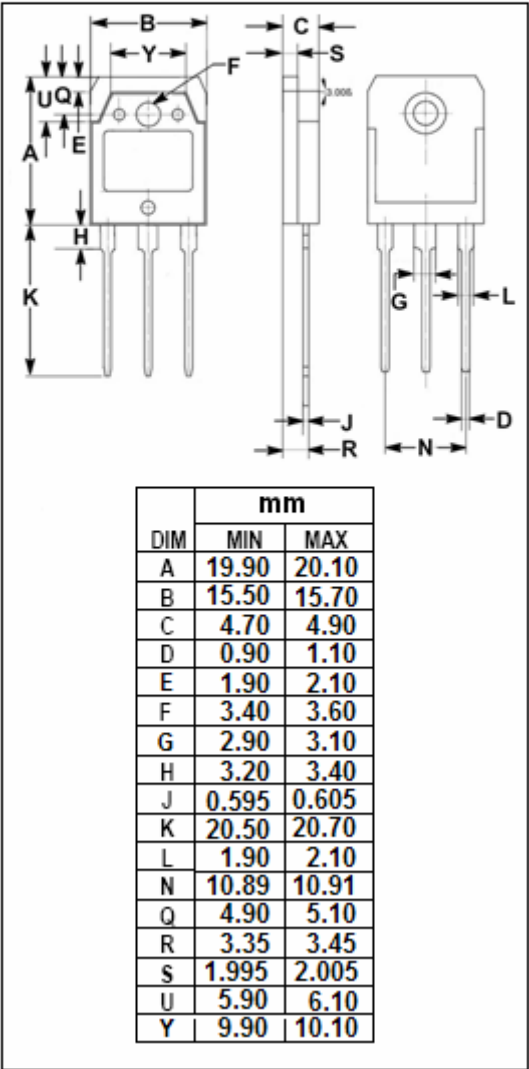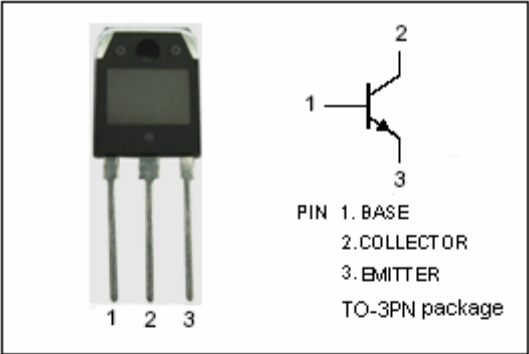

ISC Silicon NPN Power Transistor

BUW132H

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C = 0.1\text{A}$; $I_B = 0$; $L = 10\text{mH}$	450			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C = 3\text{A}$; $I_B = 0.3\text{A}$			2.5	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C = 5\text{A}$; $I_B = 0.5\text{A}$			3.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = 5\text{A}$; $I_B = 0.5\text{A}$			1.5	V
I_{CEV}	Collector Cutoff Current	$V_{CE}=V_{CESMmax}$; $V_{BE}=-1.5\text{V}$ $V_{CE}=V_{CESMmax}$; $V_{BE}=-1.5\text{V}$; $T_J=100^{\circ}\text{C}$			0.25 1.5	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = 6\text{V}$; $I_C = 0$			1	mA
h_{FE}	DC Current Gain	$I_C = 8\text{A}$; $V_{CE} = 5\text{V}$	7			
C_{OB}	Output Capacitance	$I_E = 0$; $V_{CB} = 10\text{V}$; $f_{test} = 1\text{kHz}$			350	pF

Switching Times , Resistive Load

t_{on}	Turn-On Time	$I_C = 5\text{A}$; $I_{B1} = 0.5\text{A}$; $I_{B2} = -1\text{A}$		0.4		μS
t_{stg}	Storage Time			1.5		μS
t_f	Fall Time			0.1		μS