

BR305 THRU BR310


3.0A BRIDGE RECTIFIERS

Features

- Diffused junction
- High current capability
- High case dielectric strength
- High surge current capability
- Ideal for printed circuit board application
- Plastic material has underwriters laboratory flammability classification 94V-O

Mechanical Data

- **Case:** Molded Plastic
- **Terminals:** Plated leads solderable per MIL-STD-202, Method 208
- **Polarity:** Marked on body

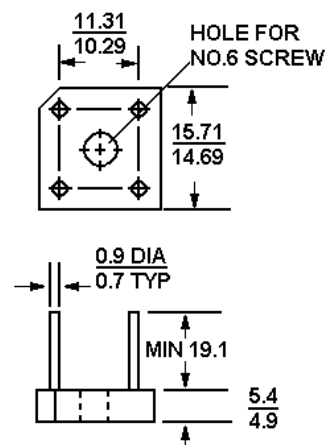

Dimensions in mm

Absolute Maximum Ratings and Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load, For capacitive load, derate current by 20%.


	Symbols	BR 305	BR 31	BR 32	BR 34	BR 36	BR 38	BR 310	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Average rectified output current (note1) at $T_C = 50^\circ C$	I_O	3.0							A
Non-repetitive Peak forward surge current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							A
Maximum instantaneous forward voltage drop per leg at 1.5A	V_F	1.2							V
Maximum DC reverse current $T_C = 25^\circ C$ at rated DC blocking voltage per leg $T_C = 100^\circ C$	I_R	10 1.0							uA mA
Rating for fusing ($t < 8.3ms$)(note 2)	I^2t	10							A ² s
Typical junction capacitance(note3)	C_j	55							pF
Typical thermal resistance per leg (note 4)	$R_{\theta JC}$	25							K/W
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +125							°C

Notes: 1. Mounted on metal chassis

2. Non-repetitive, for $t > 1ms$ and $< 8.3ms$


3. Measured at 1.0MHz and applied reverse voltage of 4.0V.DC

4. Thermal resistance junction to case per element



SEMTECH ELECTRONICS LTD.


(Subsidiary of Semtech International Holdings Limited, acompany
listed on the Hong Kong Stock Exchange, Stock Code: 724)




Dated : 11/12/2003

BR305 THRU BR310


Forward Current Derating Curve

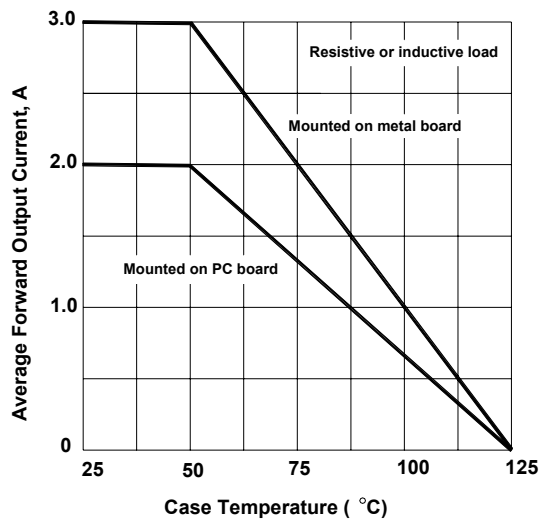



Typical Forward Characteristics, per element

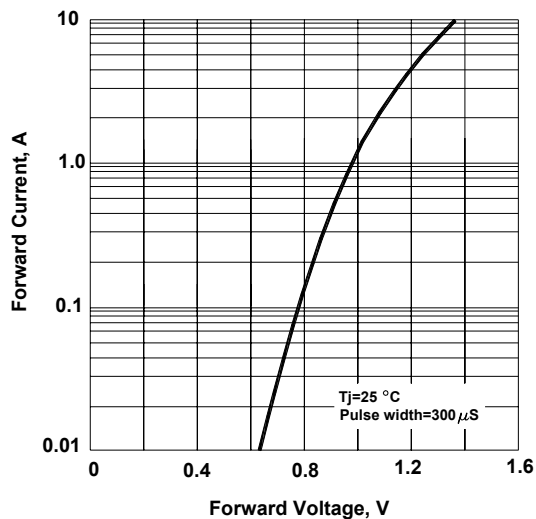

Max Non-repetitive Peak Forward Surge Current

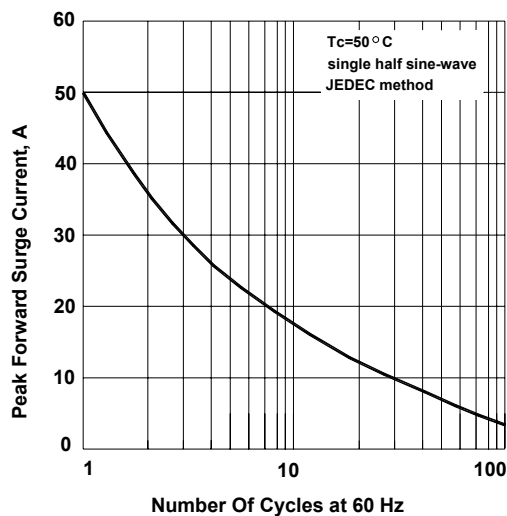


Typical Reverse Characteristics, per element

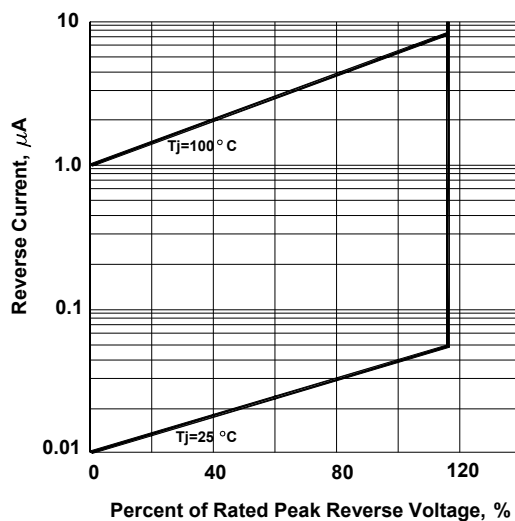

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001
Certificate No. 7116



ISO 9001 : 2000
Certificate No. 6559-1999-40-800-Int

Dated : 11/12/2003