


NEGATIVE ADJUSTABLE VOLTAGE REGULATOR

IP137SMD05 / LM137SMD05
IP137ASMD05 / LM137ASMD05
IP137HVSMD05 / LM137HVSMD05
IP137AHVSMD05/ LM137AHVSMD05



FEATURES

- 1.5A Output Current Guaranteed
- Internal Thermal Overload Protection
- Output Short Circuit Protected
- Hermetic Ceramic Surface Mount Package
- Screening Options Available

APPLICATIONS

- Adjustable Power Supplies
- System Power Supplies
- Precision Voltage / Current Regulators

DESCRIPTION

The 137 Series regulators are adjustable 3 terminal voltage regulators capable of supplying in excess of -1.5A over an output voltage range of -1.2V to -37V (HV Series, -47V). The regulators are exceptionally easy to apply requiring only 2 external resistors to set the output voltage and 1 output capacitor for frequency compensation.

Every effort has been made to make these devices easy to use and difficult to damage. Internal current limiting and power limiting coupled with true thermal limiting prevents damage due to overloads or shorts, even if the regulators are not fastened to a heat sink.

ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

$V_I - V_O$	Input – Output Voltage Differential	Standard	40V
		HV Series	50V
I_O	Output Current	Internally Limited	
P_D	Power Dissipation	Internally Limited	
T_J	Operating Junction Temperature Range	-55 to +150°C	
T_{stg}	Storage Temperature Range	-65 to +150°C	

THERMAL PROPERTIES

Symbols	Parameters	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Thermal Resistance, Junction To Case			3.5	°C/W

** This datasheet supersedes document 2831

Semelab Limited reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab Limited

Coventry Road, Lutterworth, Leicestershire, LE17 4JB

Telephone +44 (0) 1455 556565

Fax +44 (0) 1455 552612

Email: sales@semelab-tt.com

Website: <http://www.semelab-tt.com>



A subsidiary of
TT electronics plc.

Document Number 8377

Issue 1

Page 1 of 5

NEGATIVE ADJUSTABLE VOLTAGE REGULATOR

ELECTRICAL CHARACTERISTICS(1)(3) ($T_C = 25^\circ\text{C}$ unless otherwise stated)

LM137, IP137, LM137HV, IP137HV							
Symbols	Parameters	Test Conditions		Min.	Typ	Max.	Units
V _{REF}	Reference Voltage	I _{OUT} = 10mA		-1.225	-1.250	-1.275	V
		10mA ≤ I _{OUT} ≤ I _{MAX} , P ≤ P _{MAX} , 3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX}		• -1.200	-1.250	-1.300	
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation (2)	3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX} , I _{OUT} = 10mA			0.010	0.020	% / V
				•	0.020	0.050	
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation (2)(3)	10mA ≤ I _{OUT} ≤ I _{MAX}	V _{OUT} ≤ 5V		15	25	mV
			V _{OUT} ≥ 5V		0.3	0.5	%
			V _{OUT} ≤ 5V	•	20	50	mV
			V _{OUT} ≥ 5V	•	0.3	1.0	%
	Thermal Regulation	V _{IN} = -7.92V, I _{OUT} = 1.5A, P _D = 10W, T _A = 25°C, 10ms Pulse			0.002	0.02	% / W
	Ripple Rejection	V _{OUT} = -10V f = 120Hz	C _{ADJ} = 0		60		dB
			C _{ADJ} = 10μF	• 66	77		
I _{ADJ}	Adjust Pin Current			•	65	100	μA
ΔI _{ADJ}	Adjust Pin Current Change	10mA ≤ I _{OUT} ≤ I _{MAX}		•	0.5	5	
		3V ≤ (V _{IN} -V _{OUT}) ≤ 40V		•	2	5	
		3V ≤ (V _{IN} -V _{OUT}) ≤ 50V (HV Series)		•	3	6	
I _{MIN}	Minimum Load Current	(V _{IN} - V _{OUT}) ≤ 40V		•	2.5	5	mA
		(V _{IN} - V _{OUT}) ≤ 10V		•	1.2	3	
I _{CL}	Current Limit	(V _{IN} - V _{OUT}) ≤ 15V		• 1.5	2.2	3.2	A
		(V _{IN} - V _{OUT}) = 40V		• 0.24	0.4		
		(V _{IN} - V _{OUT}) = 50V (HV Series)		• 0.2	0.4	0.8	
$\frac{\Delta V_{OUT}}{\Delta TEMP}$	Temperature Stability			•	0.6		%
$\frac{\Delta V_{OUT}}{\Delta TIME}$	Long Term Stability	T _A = 125°C, 1000Hrs			0.3	1.0	
e _n	RMS Output Noise (% of V _{OUT})	T _A = 25°C, 10Hz ≤ f ≤ 10KHz			0.003		

Notes

The • denotes the specifications which apply over the full operating temperature range.

- Test conditions unless otherwise stated: $V_{IN} - V_{OUT} = 5\text{V}$, $I_{OUT} = 0.5\text{A}$, $P_{MAX} = 10\text{W}$, $I_{MAX} = 1.5\text{A}$
- Regulation is measured at constant junction temperature, using pulse testing at a low duty cycle. Changes in output voltage due to heating effects are covered under thermal regulation specifications. Load regulation is measured at the junction of the wide and narrow portion of the output lead.
- $V_{MAX} = 40\text{V}$ for LM137, IP137, LM137A, IP137A
 $V_{MAX} = 50\text{V}$ for LM137HV, IP137HV, LM137AHV, IP137AHV

NEGATIVE ADJUSTABLE VOLTAGE REGULATOR

ELECTRICAL CHARACTERISTICS(1)(3) ($T_C = 25^\circ\text{C}$ unless otherwise stated)

LM137A, IP137A, LM137AHV, IP137AHV								
Symbols	Parameters	Test Conditions		Min.	Typ	Max.	Units	
V _{REF}	Reference Voltage	I _{OUT} = 10mA			-1.238	-1.250	-1.262	V
		10mA ≤ I _{OUT} ≤ I _{MAX} , P ≤ P _{MAX} , 3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX}		●	-1.220	-1.250	-1.280	
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation (2)	3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX} , I _{OUT} = 10mA				0.005	0.010	% / V
				●		0.010	0.030	
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation (2)(3)	10mA ≤ I _{OUT} ≤ I _{MAX}	V _{OUT} ≤ 5V			5	25	mV
			V _{OUT} ≥ 5V			0.1	0.5	%
			V _{OUT} ≤ 5V	●		10	50	mV
			V _{OUT} ≥ 5V	●		0.2	1.0	%
	Thermal Regulation	V _{IN} = -7.92V, I _{OUT} = 1.5A, P _D = 10W, T _A = 25°C, 10ms Pulse				0.002	0.02	% / W
	Ripple Rejection	V _{OUT} = -10V f = 120Hz	C _{ADJ} = 0		60	66		dB
			C _{ADJ} = 10μF	●	70	80		
I _{ADJ}	Adjust Pin Current			●		65	100	μA
ΔI _{ADJ}	Adjust Pin Current Change	10mA ≤ I _{OUT} ≤ I _{MAX}		●		0.2	2	
		3V ≤ (V _{IN} -V _{OUT}) ≤ 40V		●		1.0	5	
		3V ≤ (V _{IN} -V _{OUT}) ≤ 50V (HV Series)		●		2	6	
I _{MIN}	Minimum Load Current	(V _{IN} - V _{OUT}) ≤ 40V		●		2.5	5	mA
		(V _{IN} - V _{OUT}) ≤ 10V		●		1.2	3	
I _{CL}	Current Limit	(V _{IN} - V _{OUT}) ≤ 15V		●	1.5	2.2	3.2	A
		(V _{IN} - V _{OUT}) = 40V		●	0.24	0.4	1.0	
		(V _{IN} - V _{OUT}) = 50V (HV Series)		●	0.2	0.4	0.8	
$\frac{\Delta V_{OUT}}{\Delta TEMP}$	Temperature Stability			●		0.6	1.5	%
$\frac{\Delta V_{OUT}}{\Delta TIME}$	Long Term Stability	T _A = 125°C, 1000Hrs				0.3	1.0	
e _n	RMS Output Noise (% of V _{OUT})	T _A = 25°C, 10Hz ≤ f ≤ 10KHz				0.003		

Notes

The ● denotes the specifications which apply over the full operating temperature range.


- Test conditions unless otherwise stated: $V_{IN} - V_{OUT} = 5\text{V}$, $I_{OUT} = 0.5\text{A}$, $P_{MAX} = 10\text{W}$, $I_{MAX} = 1.5\text{A}$
- Regulation is measured at constant junction temperature, using pulse testing at a low duty cycle. Changes in output voltage due to heating effects are covered under thermal regulation specifications. Load regulation is measured at the junction of the wide and narrow portion of the output lead.
- $V_{MAX} = 40\text{V}$ for LM137, IP137, LM137A, IP137A
 $V_{MAX} = 50\text{V}$ for LM137HV, IP137HV, LM137AHV, IP137AHV

NEGATIVE ADJUSTABLE VOLTAGE REGULATOR

APPLICATIONS INFORMATION

High Stability Regulator


The output stability, load regulation, line regulation, thermal regulation, temperature drift, long term drift, and noise, can be improved by a factor of 6.6 over the standard regulator configuration. This assumes a zener has 20PPM/°C maximum drift and about 10 times lower noise than the regulator.

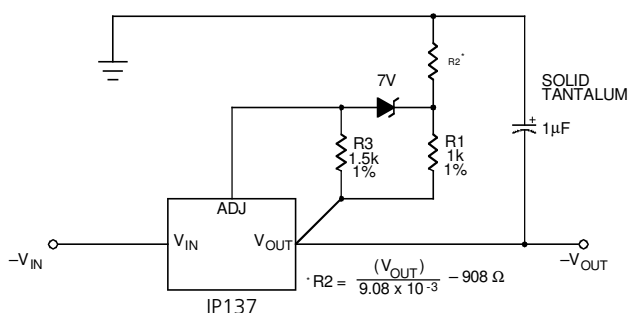


Multiple Tracking Regulators

In the application shown below, regulator #2 to "N" will track regulator #1 to within $\pm 24\text{mV}$ initially, and to $\pm 60\text{mV}$ over all load line, and temperature conditions.

If any regulator output is shorted to ground, all other outputs will drop to -2V. Load regulation of regulators #2 to "N" will be improved by $V_{\text{OUT}} / 1.25\text{V}$ compared to a standard, so regulator #1 should be the one which has the lowest load current.

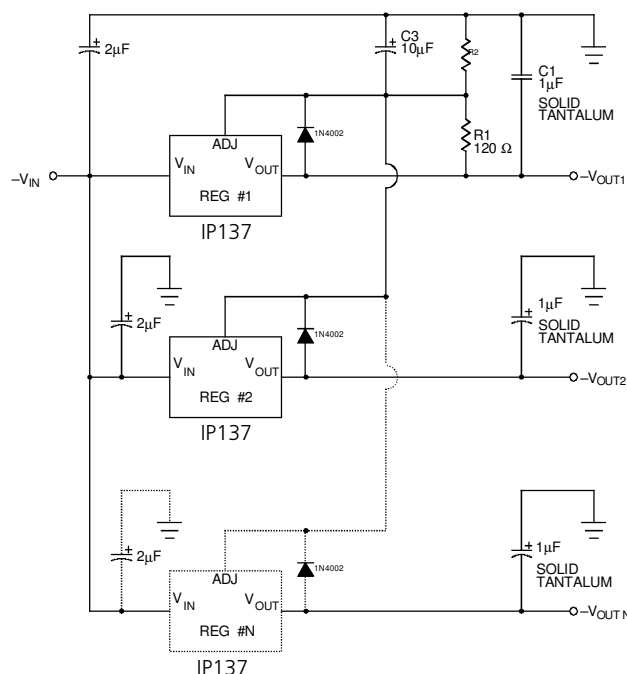


Dual Tracking Supply

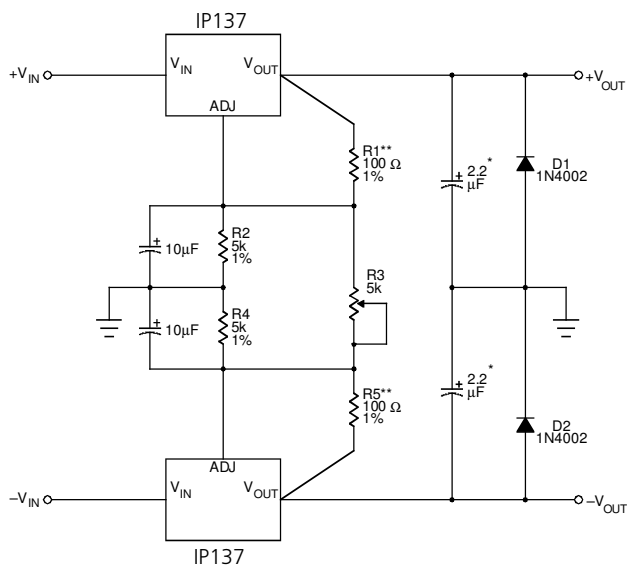

* Solid Tantalum

** R1 & R5 maybe trimmed slightly to improve tracking

Current Regulator

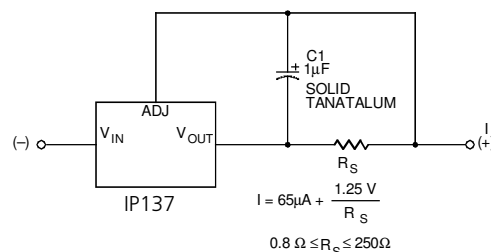

Dimensions in mm (inches)



Document Number 8377
Issue 1
Page 5 of 5