

LED LAMP CLUSTER

BL-CR15AR3G4

Features:

- Shape: Round
- Diameter: 15mm
- High visibility
- Emitting Color: red, green
- No of Built-in 5mm LED Lamps :
- Ultra orange - 3pcs, ultra green – 4pcs
- Waterproof Package With Hood Suitable
- For Outdoor and Indoor Information Boards
- Rohs Compliance



Selection Guide

Part No.	Description
BL-CR15AR3G4	15mm Round Lamp cluster 3 red ,4 green, round packed

Description:

- Color Code & Chip characteristics: (Test Condition: IF=20mA)

Part No.	Built-in Lamp Package	Built-in Lamp Part No. BL-L	Chip		Lens Appearance	Electro-optical Data(At 20mA)			Viewing Angle 2 θ 1/2 (deg)
			Material/ Emitted Color	Peak Wave Length λ _p (nm)		V _f (V)		I _v (mcd)	
						Typ	Max	Typ	
BL-CR15 AR3G4	4x5x7mm 1.0" Lead Oval	563UET	AlGaInP/ Ultra Orange	630	Water clear	2.10	2.50	800	X-X 45 Y-Y 25
		563UGT	AlGaInP/ Ultra Green	574	Water clear	2.20	2.50	700	

Notes:

1. θ 1/2 Is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


Absolute Maximum Rating (Each Lamp, Ta=25°C Derate above 25°C)

Parameter	UE	UG	Unit
Forward Current I_F	30	30	mA
Power Dissipation P_d	78	78	mW
Reverse Voltage V_R	5	5	V
Peak Forward Current I_{PF} (Duty 1/10 @1KHZ)	100	100	mA
Operation Temperature T_{OPR}	-30 to +80		°C
Storage Temperature T_{STG}	-40 to +85		°C
Lead Soldering Temperature T_{SOL}	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)		°C

LED LAMP CLUSTER

BL-CR15AR3G4

■ Package configuration & Internal circuit diagram:

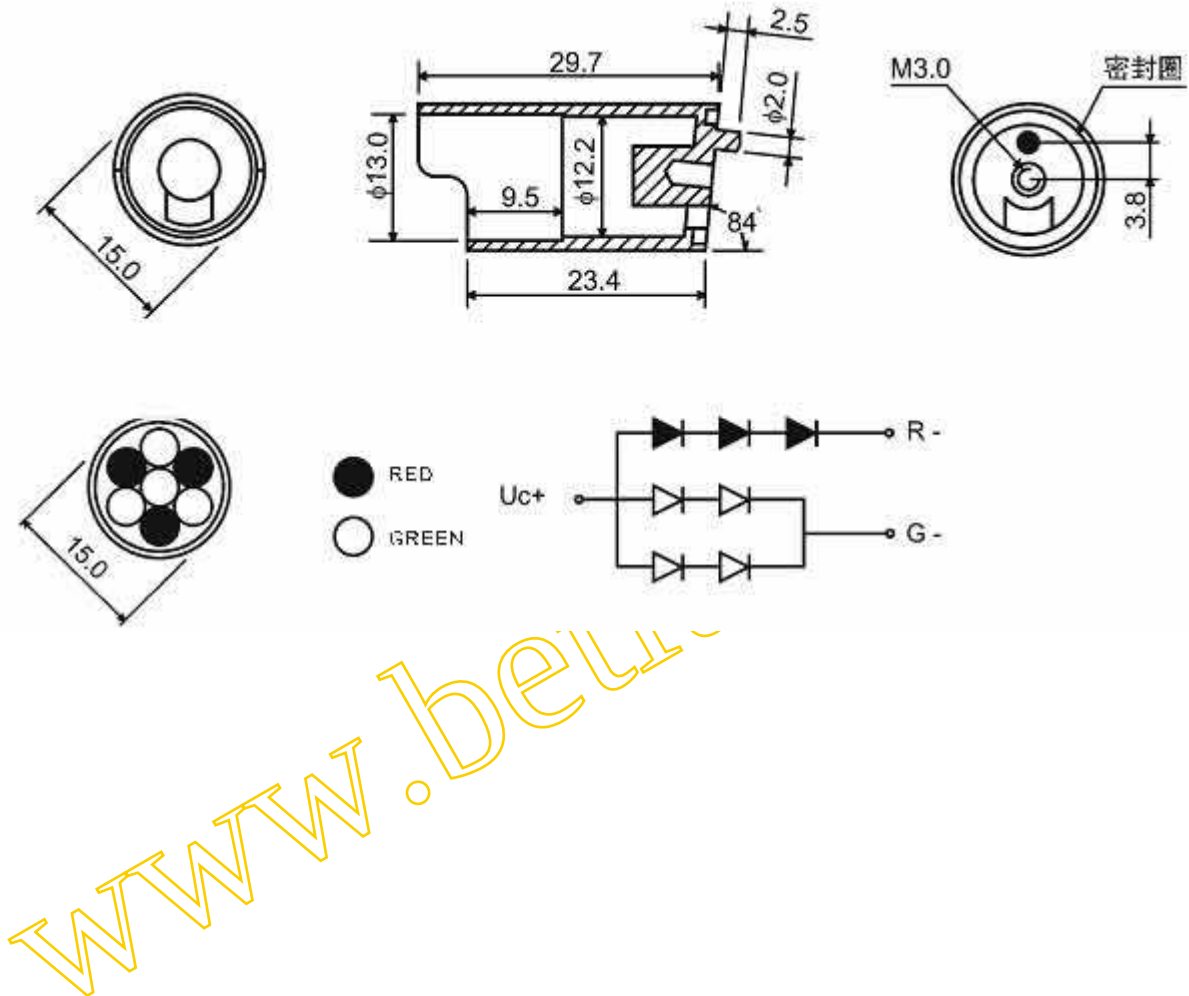


Notes:

- All dimensions are in millimeters (inches)
- Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
- Specifications are subject to change without notice.







LED LAMP CLUSTER

BL-CR15AR3G4

Typical electrical-optical characteristics curves:

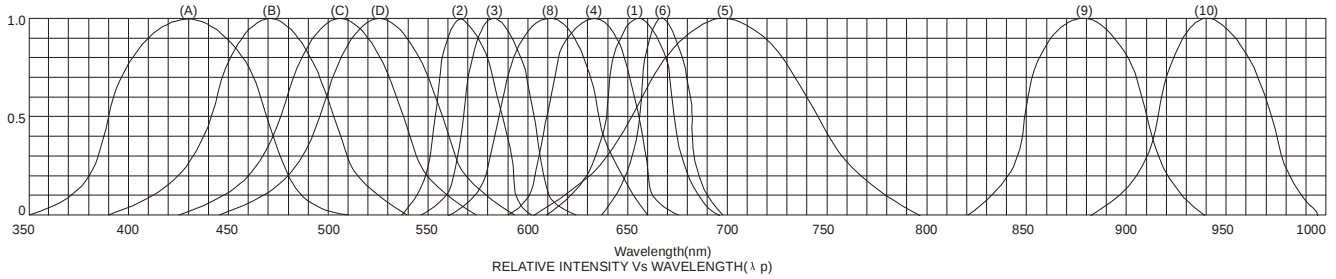

- | | |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red | (9) - GaAlAs 880nm |
| (2) - GaP 570nm/Yellow Green | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow | (A) - GaN/SiC 430nm/Blue |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue |
| (5) - GaP 700nm/Bright Red | (C) - InGaN/SiC 505nm/Ultra Green |
| (6) - GaAlAs/GaAs 660nm/Super Red | (D) - InGaAl/SiC 525nm/Ultra Green |
| (8) - GaAsP/GaP 610nm/Super Red | |

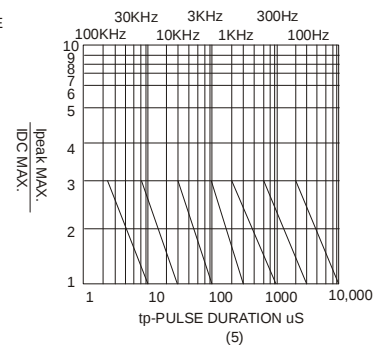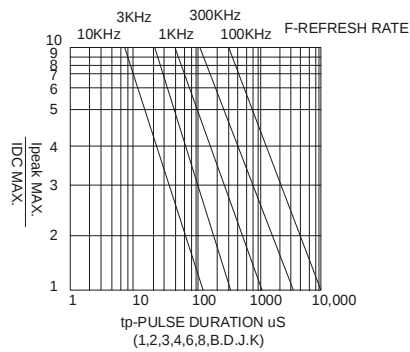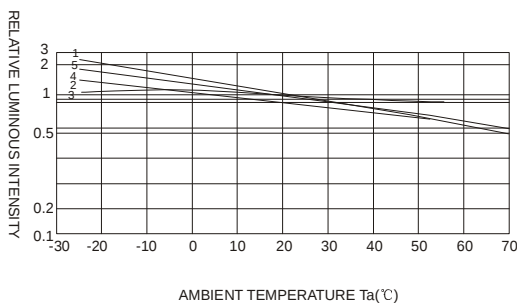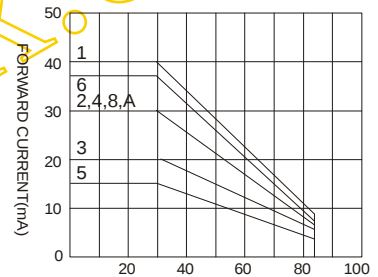

NOTE: 25°C free air temperature unless otherwise specified