

isc Silicon PNP Power Transistors

BDT30F/AF/BF/CF/DF

DESCRIPTION

- DC Current Gain $-h_{FE} = 40(\text{Min})@ I_C = -0.4\text{A}$
- Collector-Emitter Sustaining Voltage-
: $V_{CEO(\text{SUS})} = -40\text{V}(\text{Min})$ - BDT30F; $-60\text{V}(\text{Min})$ - BDT30AF
 $-80\text{V}(\text{Min})$ - BDT30BF; $-100\text{V}(\text{Min})$ - BDT30CF
 $-120\text{V}(\text{Min})$ - BDT30DF
- Complement to Type BDT29F/AF/BF/CF/DF

APPLICATIONS



- Designed for use in audio output stages , general purpose amplifier and high speed switching applications

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}\text{C}$)

SYMBOL	PARAMETER		VALUE	UNIT
V_{CBO}	Collector-Base Voltage	BDT30F	-80	V
		BDT30AF	-100	
		BDT30BF	-120	
		BDT30CF	-140	
		BDT30DF	-160	
V_{CEO}	Collector-Emitter Voltage	BDT30F	-40	V
		BDT30AF	-60	
		BDT30BF	-80	
		BDT30CF	-100	
		BDT30DF	-120	
V_{EBO}	Emitter-Base Voltage		-5	V
I_C	Collector Current-Continuous		-1	A
I_{CM}	Collector Current-Peak		-3	A
I_B	Base Current		-0.4	A
P_C	Collector Power Dissipation $T_C=25^{\circ}\text{C}$		19	W
T_j	Junction Temperature		150	$^{\circ}\text{C}$
T_{stg}	Storage Ttemperature Range		-65~150	$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance,Junction to Case	9.17	$^{\circ}\text{C/W}$
$R_{th\ j-a}$	Thermal Resistance,Junction to Ambient	55	$^{\circ}\text{C/W}$

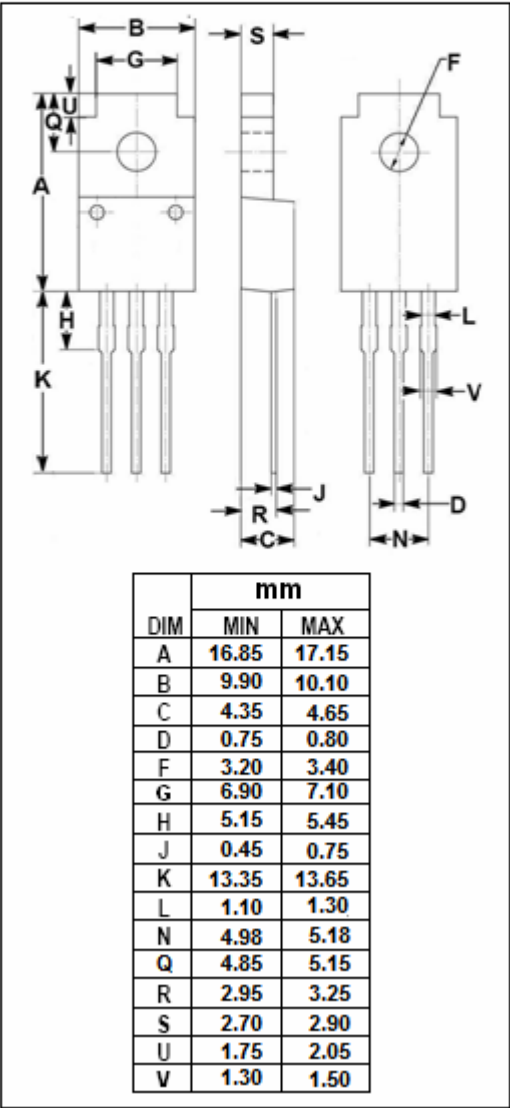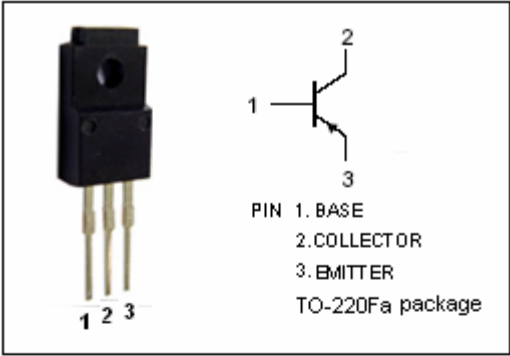

isc Silicon PNP Power Transistors

BDT30F/AF/BF/CF/DF

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	BDT30F	$I_C = -30\text{mA}; I_B = 0$	-40			V
		BDT30AF		-60			
		BDT30BF		-80			
		BDT30CF		-100			
		BDT30DF		-120			
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage		$I_C = -1\text{A}; I_B = -0.125\text{A}$			-0.7	V
$V_{BE(on)}$	Base-Emitter On Voltage		$I_C = -1\text{A}; V_{CE} = -4\text{V}$			-1.3	V
I_{CES}	Collector Cutoff Current		$V_{CE} = V_{CEOmax}; V_{BE} = 0$			-0.2	mA
I_{CEO}	Collector Cutoff Current	BDT30F/AF	$V_{CE} = -30\text{V}; I_B = 0$			-0.1	mA
		BDT30BF/CF	$V_{CE} = -60\text{V}; I_B = 0$				
		BDT30DF	$V_{CE} = -90\text{V}; I_B = 0$				
I_{EBO}	Emitter Cutoff Current		$V_{EB} = -5\text{V}; I_C = 0$			-0.2	mA
h_{FE-1}	DC Current Gain		$I_C = -0.2\text{A}; V_{CE} = -4\text{V}$	40			
h_{FE-2}	DC Current Gain		$I_C = -1\text{A}; V_{CE} = -4\text{V}$	15		75	
f_T	Current-Gain—Bandwidth Product		$I_C = -0.2\text{A}; V_{CE} = -10\text{V}$	3			MHz

Switching Times

t_{on}	Turn-On Time	$I_C = -1.0\text{A}; I_{B1} = -I_{B2} = -0.1\text{A}$		0.3		μs
t_{off}	Turn-Off Time			1.0		μs