


MCO-3S-DS-6p

SMD Clock Oscillator
LVDS


QuartzCom
the communications company



Features

- Applications: 10 Gigabit Ethernet, SDH, SONET, Fibre Channel broadband access, DSL, GPON and switching system
- Output frequency up to 212.5 MHz
- Low jitter < 0.5 ps
- Small package size: 5.0 x 3.2 x 1.3 mm


Parameter	Specification	
	MCO-3S25-DS-6p	MCO-3S3-DS-6p
Frequency range	20 ~ 212.5 MHz	
Standard frequencies	106.25, 120.00, 122.88, 125.00, 153.60, 155.52, 156.250, 159.375 161.1328, 200.00 & 212.50 MHz	
Supply voltage	+2.5 V $\pm 5\%$	+3.3 V $\pm 5\%$
Output signal	LVDS	
Output voltage	$V_{OH} \leq 1.60\text{ V}$ $V_{OL} \geq 0.9\text{ V}$	$V_{OH} \leq 1.60\text{ V}$ $V_{OL} \geq 0.9\text{ V}$
Output load	100 Ω	
Supply current	30 ~ 70 mA	
Frequency stability (*)	< ± 25 ppm < ± 50 ppm	over -20 ~ +70 °C over -40 ~ +85 °C
Jitter (rms)	< 0.5 ps @ 12 kHz ~ 20 MHz from carrier frequency	
Symmetry	45 ~ 55 %	@ $\frac{1}{2}$ Vdc
Rise / Fall time	< 1.0 ns	20 to 80 % of amplitude
Tri-state function	Pin #1 = high or open Pin #1 = low	Pin #4 & #5 $\rightarrow$ signal Pin #4 & #5 $\rightarrow$ high impedance
Operating temperature range	-20 ~ +70 °C -40 ~ +85 °C	commercial application industrial application
Storage temperature range	-55 ~ +125 °C	
Packaging unit	tape & reel	1'000 pcs
(*) All inclusive: frequency stability vs. temperature, tolerance, aging, supply & load variation, on request		
Customer specifications on request		

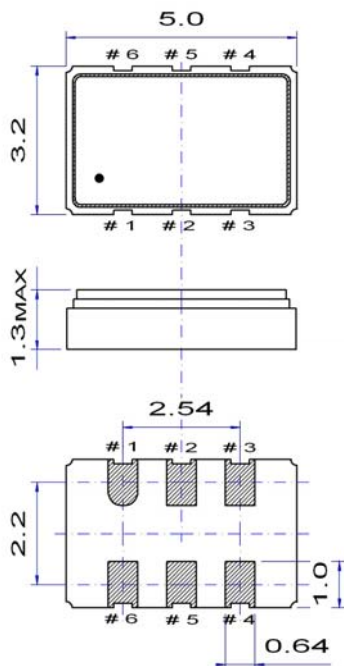

Pin function


- #1 Tri-state or not connected
- #2 not connected
- #3 GND
- #4 Output
- #5 Complementary Output
- #6 Vdc

Example for solder pattern



Do not design any conductive path between the pattern

Example for IR reflow soldering temperature

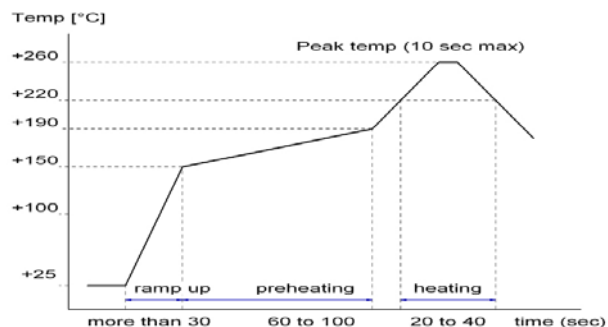

2002/95/EC RoHS compliant

QuartzCom AG
sales@quartzcom.com
www.quartzcom.com

QuartzCom Asia
sales-asia@quartzcom.com

QuartzCom USA
sales-usa@quartzcom.com

20 Apr. 10

