

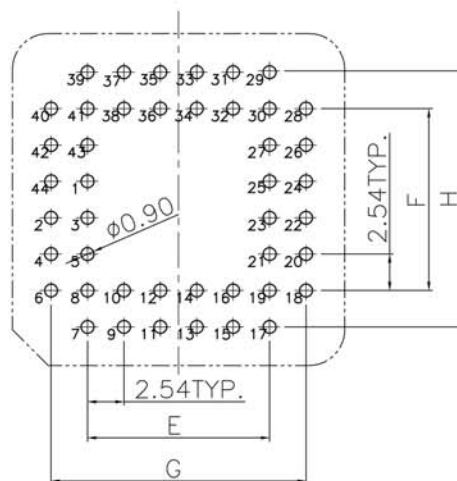
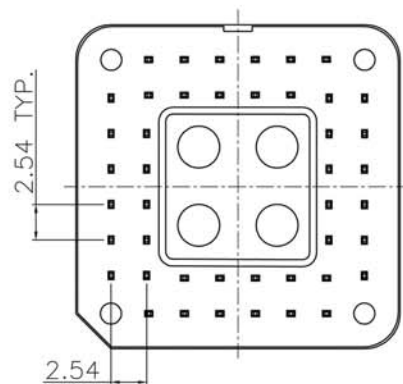




RECOMMENDED P.C. BOARD LAYOUT



NOTES:

SPECIFICATIONS:

CURRENT RATING:1 AMP.

VOLTAGE:250V AC/DC MAX.

DIELECTRIC WITHSTANDING:500VAC FOR ONE MINUTE.

CONTACT RESISTANCE:30mΩ (MAX).

INSULATION RESISTANCE:1000MΩ (MIN).

OPERATING TEMPERATURE: $-55^{\circ}\text{C}+105^{\circ}\text{C}$

RETENTION FORCE:0.30KG PER PIN (MIN).

MATERIALS:

BODY: PBT+30%GF UL 94V-0.

COVER:PBT+30%GF UL 94V-0.

CONTACTS:PHOSOR BRONZE.

CONTACT PLATING TIN/GOLD.

Dimension No.Of Pin	(mm)	A	B	C	D	E	F	G	H	I
DIP – 20P		15.56	15.56	9.10	9.10	5.08	5.08	10.16	10.16	17.55
DIP – 28P		18.10	18.10	11.66	11.66	7.62	7.62	12.70	12.70	21.25
DIP – 32P		20.60	18.10	14.17	11.69	7.62	10.16	12.70	15.24	23.00
DIP – 44P		23.48	23.48	16.78	16.78	12.70	12.70	17.78	17.78	28.50
DIP – 52P		25.88	25.88	19.28	19.28	15.24	15.24	20.32	20.32	32.45
DIP – 68P		31.66	31.66	24.35	24.35	20.32	20.32	25.40	25.40	39.30
DIP – 84P		36.66	36.66	29.38	29.38	25.40	25.40	30.48	30.48	46.85

RoHS
Compliant

ITEM NO

A-CCSXX-Z-R (TIN)
A-CCSXX-G-R (GOLD)

TITLE

CHIP-CARRIER PLCC SOCKET

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 – Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved