


B-140C 3PDT, Center Off, 30 Amps, 120 VAC, 60 Hz




Features:

- 3PDT Center Off Main Contacts
- 120 VAC, 60 Hz
- 30 Amps
- High Reliability
- Meets many requirements of MIL-R-6106


CONTACTOR CONFIGURATION

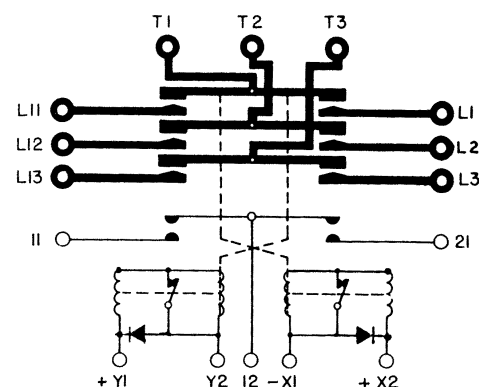

Notes:

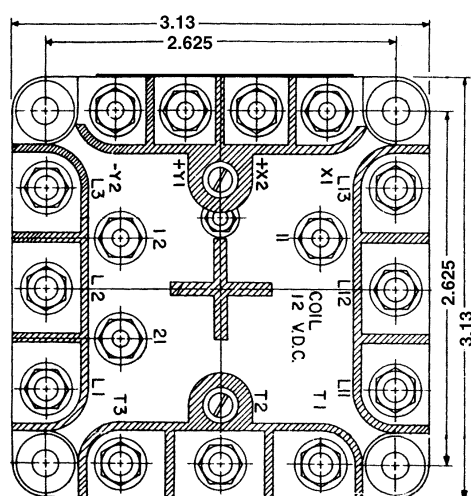

Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.

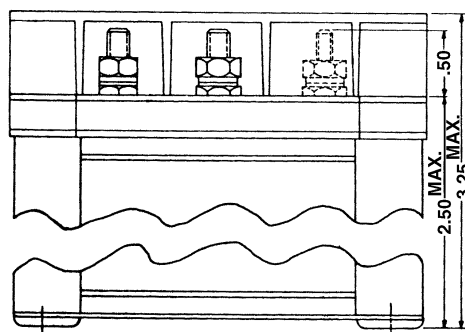

PRODUCT SPECIFICATIONS

Construction	Gasket Sealed, Vented
Main Contacts:	
Configuration	3PDT Center Off
Voltage (Nominal)	120 VAC, 60 Hz
Current (Resistive)	30 Amps
Auxiliary Contacts:	
Configuration	SPST Center Off
Voltage (Nominal)	28 VDC
Current (Resistive)	5 Amps
Coil Data:	
Duty Cycle	Continuous
Voltage (Nominal)	12 VDC
Pick-Up Voltage	9 VDC Maximum
Drop-Out Voltage	0.5 - 35 VDC
Coil Current @ 12 VDC & +25°C	
In-Rush	8 Amps Maximum
Hold	0.7 Amps Maximum
Operating Temperature	-28°C to +37°C
Life:	
Electrical	50,000 Cycles
Mechanical	100,000 Cycles
Weight Maximum	1 Lb. 8 Oz.

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.