




15 Pin Male Connector  
PCB Pin Layout  
Scale 2:1

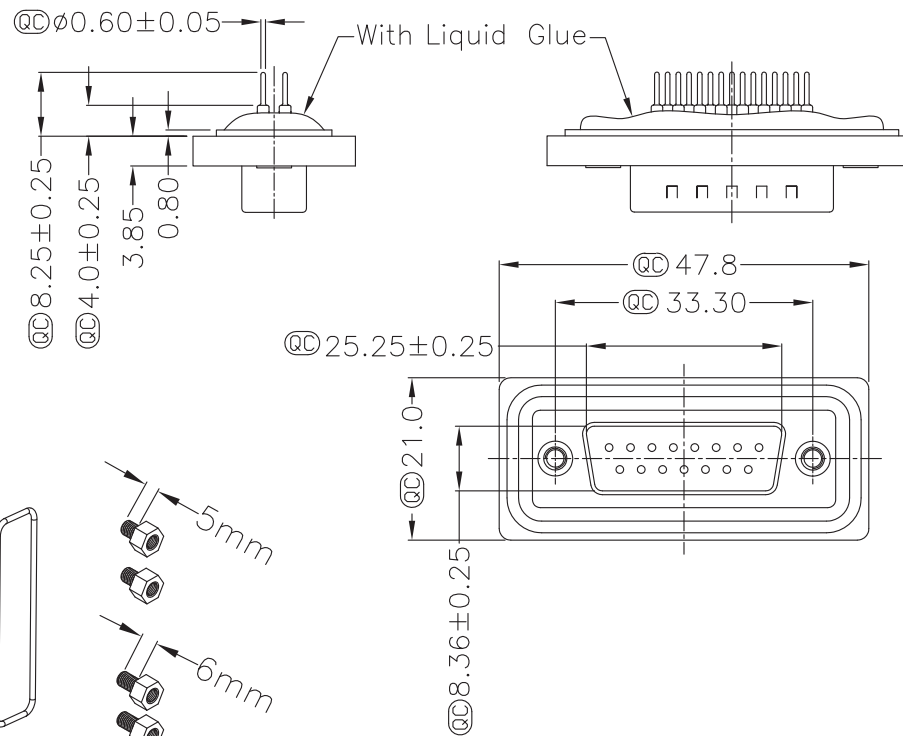


Screw L= 5.0 For Panel Thickness  
Under 1.2 mm

Screw L= 6.0 For Panel Thickness  
Between 1.2~2.0mm

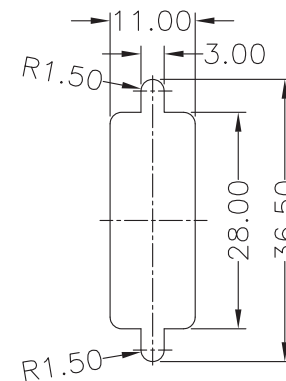

**Recommended Panel Cut-Out**



#### Material:

- Waterproof Rating: IP67
  - IP68: 1M of depth of water 24 hours
  - Do Mating Test After Glued
- DSub Connector: Black Core, PBT
- Plastic Jacket Black, Nylon+GF
- Pin: Copper Alloy, Gold Plated
- Ring: Light Blue, Silicone
- Screw: Copper Alloy, Nickel Plated, #4-40 UNC

QC Quality Control: Important Dimension to check  
Unit: MM±0.1MM

Ⓐ = Assmann logo

**RoHS**  
Compliant

ITEM NO.

**A-DS15PP-WP-R**

TITLE

Waterproof DSub Connector - Straight Pin,  
for PCB mount, 15 contacts Male

**ASSMANN**  
WSW components

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@assmann.us

THIS DRAWING IS UNPUBLISHED  
©Copyright 2011 by Assmann WSW components  
All International Rights Reserved