# Panasonic ideas for life

NARROW-PITCH, THIN AND SLIM CONNECTOR FOR BOARD-TO-FPC CONNECTION NARROW PITCH (0.4 mm) CONNECTORS F4S SERIES

## ideas for in





#### **Compliance with RoHS Directive**


#### **FEATURES**

## 1. Space-saving (3.6 mm widthwise)

The required space is smaller than our F4 series (40-contact type):

Socket — 27% smaller, Header — 38% smaller

The small size contributes to the miniaturization of target equipment.



\* Clips for preventing the solder joints from being removed


#### 2. Highly reliable

## **TDUGH CONTRET** has strong resistance to adverse environments.

(See Page 6 for details of the structure)

Note: If extra resistance to shock caused by dropping
is required, we recommend using our previous
F4 Series.

3. The simple lock structure gives tactile feedback that ensures a superior mating/unmating operation feel.




#### 4. Gull-wing type terminals

The gull-wing type terminals facilitate automatic mounting inspections.


**5. Connectors for inspection available** Connectors for inspection are available that are ideal for modular unit inspection and inspection in device assembly processes.

#### **APPLICATIONS**

Compact portable devices "Cellular phones, DVC, Digital cameras, etc"



#### **ORDERING INFORMATION**

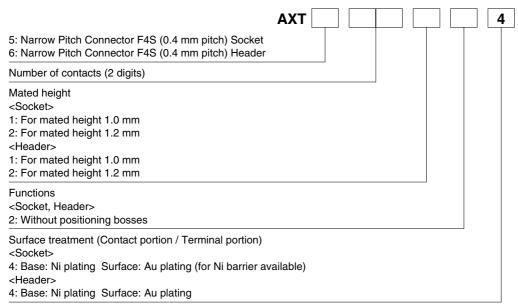

Note: Please note that models with a mated height of 1.0 mm (7th digit of part number is "1") and 1.2 mm (7th digit of part number is "2") are not compatible.

## **AXT5**, 6

## PRODUCT TYPES \*TOUGH CONTACT

Made at the Solid	No mark and a sustained	Part n	umber	Packing			
Mated height	Number of contacts	Socket	Header	Inner carton	Outer carton		
	10	AXT510124	AXT610124				
	12	AXT512124	AXT612124				
	14	AXT514124	AXT614124				
	16	AXT516124	AXT616124				
	18	AXT518124	AXT618124				
	20	AXT520124	AXT620124				
	22	AXT522124	AXT622124				
	24	AXT524124	AXT624124				
	26	AXT526124	AXT626124				
	28	AXT528124	AXT628124				
	30	AXT530124	AXT630124				
	32	AXT532124	AXT632124				
1.0mm	34	AXT534124	AXT634124				
1.0111111	36	AXT536124	AXT636124				
	38	AXT538124	AXT638124				
	40	AXT540124	3,000 pieces	6,000 pieces			
	42	AXT542124	AXT642124				
	44	AXT544124	AXT644124				
	46	AXT546124	AXT646124				
	48	AXT548124	AXT648124				
	50	AXT550124	AXT650124				
	54	AXT554124	AXT654124				
	60	AXT560124	AXT660124				
	64	AXT564124	AXT664124				
	70	AXT570124	AXT670124				
	80	AXT580124	AXT680124				
	10	AXT510224	AXT610224				
	30	AXT530224	AXT630224				
1.2mm	40	AXT540224	AXT640224				
	50	50 AXT550224 AXT650224					
	80	AXT580224	AXT680224				

Notes: 1. Order unit: For mass production: in 1-inner-box (1-reel) units
Samples for mounting check: in 50-connector units. Please contact our sales office.

Samples: Small lot orders are possible. Please contact our sales office.

The above part numbers are for connectors without positioning bosses, which are standard. When ordering connectors with positioning bosses, please contact our sales office.
 Please contact us for connectors having a number of contacts other than those listed above.

## **SPECIFICATIONS**

#### 1. Characteristics

	Item	Specifications	Conditions
	Rated current	0.3A/contact (Max. 5 A at total contacts)	
Electrical characteristics	Rated voltage	60V AC/DC	
	Breakdown voltage	150V AC for 1 min.	No short-circuiting or damage at a detection current of 1 mA when the specified voltage is applied for one minute.
	Insulation resistance	Min. 1,000MΩ (initial)	Using 250V DC megger (applied for 1 min.)
	Contact resistance	Max. 90mΩ	Based on the contact resistance measurement method specified by JIS C 5402.
	Composite insertion force	Max. 0.981N/contacts × contacts (initial)	
Mechanical	Composite removal force	Min. 0.165N/contacts × contacts	
characteristics	Contact holding force (Socket contact)	Min. 0.49N/contacts	Measuring the maximum force. As the contact is axially pull out.
	Ambient temperature	−55°C to +85°C	No freezing at low temperatures. No dew condensation.
	Soldering heat resistance	Peak temperature: 260°C or less (on the surface of the PC board around the connector terminals)	Infrared reflow soldering
		300°C within 5 sec. 350°C within 3 sec.	Soldering iron
	Storage temperature	-55°C to +85°C (product only) -40°C to +50°C (emboss packing)	No freezing at low temperatures. No dew condensation.
Environmental characteristics	Thermal shock resistance (header and socket mated)	5 cycles, insulation resistance min. 100M $\Omega$ , contact resistance max. $90m\Omega$	Sequence 155.\(\frac{9}{0}\)°C, 30 minutes 2. \(\times\), Max. 5 minutes 3. 85\(\frac{9}{0}\)°C, 30 minutes 4. \(\times\), Max. 5 minutes
	Humidity resistance (header and socket mated)	120 hours, insulation resistance min. 100M $\Omega$ , contact resistance max. $90m\Omega$	Bath temperature 40±2°C, humidity 90 to 95% R.H.
	Saltwater spray resistance (header and socket mated)	24 hours, insulation resistance min. 100M $\Omega$ , contact resistance max. 90m $\Omega$	Bath temperature 35±2°C, saltwater concentration 5±1%
	H <sub>2</sub> S resistance (header and socket mated)	48 hours, contact resistance max. $90m\Omega$	Bath temperature 40±2°C, gas concentration 3±1 ppm, humidity 75 to 80% R.H.
Lifetime characteristics	Insertion and removal life	50 times	Repeated insertion and removal speed of max. 200 times/ hours
Unit weight		20-contact type: Socket: 0.03 g Header: 0.01 g	

#### 2. Material and surface treatment


Part name	Material	Surface treatment
Molded portion	LCP resin (UL94V-0)	
Contact and Post	Copper alloy	Contact portion: Base: Ni plating Surface: Au plating Terminal portion: Base: Ni plating Surface: Au plating (except the terminal tips) The socket terminals close to the portion to be soldered have nickel barriers (exposed nickel portions).  Metal clips: Sockets: Base: Ni plating Surface: Pd+Au flash plating (except the terminal tips) Headers: Base: Ni plating Surface: Au plating (except the terminal tips)


**DIMENSIONS** (Unit: mm)

The CAD data of the products with a CAD Data mark can be downloaded from: http://panasonic-electric-works.net/ac


Socket (Mated height: 1.0 mm and 1.2 mm)









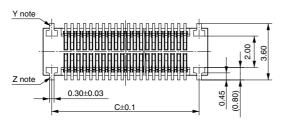

General tolerance: ±0.2

Mated height/ dimension	D
1.0mm	0.97
1.2mm	1 17


Dimension table (mm)


Difficusion table (min)										
Number of contacts/ dimension	А		С							
10	4.5	1.6	3.4							
12	4.9	2.0	3.8							
14	5.3	2.4	4.2							
16	5.7	2.8	4.6							
18	6.1	3.2	5.0							
20	6.5	3.6	5.4							
22	6.9	4.0	5.8							
24	7.3	4.4	6.2							
26	7.7	4.8	6.6							
28	8.1	5.2	7.0							
30	8.5	5.6	7.4							
32	8.9	6.0	7.8							
34	9.3	6.4	8.2							
36	9.7	6.8	8.6							
38	10.1	7.2	9.0							
40	10.5	7.6	9.4							
42	10.9	8.0	9.8							
44	11.3	8.4	10.2							
46	11.7	8.8	10.6							
48	12.1	9.2	11.0							
50	12.5	9.6	11.4							
54	13.3	10.4	12.2							
60	14.5	11.6	13.4							
64	15.3	12.4	14.2							
70	16.5	13.6	15.4							
80	18.5	15.6	17.4							

Note: Since the clip (soldering terminal)\* has a single-piece construction, sections Y and Z are electrically connected.

#### Header (Mated height: 1.0 mm and 1.2 mm)



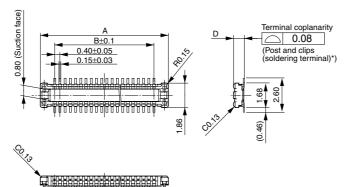

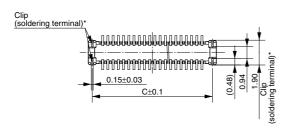

General tolerance: ±0.2


Mated height/ dimension	D
1.0mm	0.83
1.2mm	1.01

#### Dimension table (mm)

	,		
Number of contacts/ dimension	А	В	С
10	3.8	1.6	3.2
12	4.2	2.0	3.6
14	4.6	2.4	4.0
16	5.0	2.8	4.4
18	5.4	3.2	4.8
20	5.8	3.6	5.2
22	6.2	4.0	5.6
24	6.6	4.4	6.0
26	7.0	4.8	6.4
28	7.4	5.2	6.8
30	7.8	5.6	7.2
32	8.2	6.0	7.6
34	8.6	6.4	8.0
36	9.0	6.8	8.4
38	9.4	7.2	8.8
40	9.8	7.6	9.2
42	10.2	8.0	9.6
44	10.6	8.4	10.0
46	11.0	8.8	10.4
48	11.4	9.2	10.8
50	11.8	9.6	11.2
54	12.6	10.4	12.0
60	13.8	11.6	13.2
64	14.6	12.4	14.0
70	15.8	13.6	15.2
80	17.8	15.6	17.2

#### Socket and Header are mated





Mated height: 1.0 mm

Mated height: 1.2 mm


## EMBOSSED TAPE DIMENSIONS (Unit: mm) (Common to all sockets and headers)


#### • Specifications for taping


(In accordance with JIS C 0806-1990. However, not applied to the mounting-hole pitch of some connectors.)

## • Specifications for the plastic reel

(In accordance with EIAJET-7200B.)






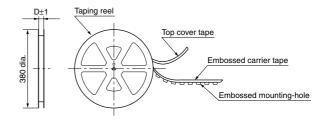

#### • Dimension table (Unit: mm)

Type/Mated height	Number of contacts	Type of taping	А	В	С	D	Quantity per reel
Common for sockets and headers: 1.0mm, 1.2mm	24 or less	Tape I	16.0		7.5	17.4	3,000
	26 to 70	Tape I	24.0	_	11.5	25.4	3,000
	80	Tape II	32.0	28.4	14.2	33.4	3,000

#### • Connector orientation with respect to embossed tape feeding direction

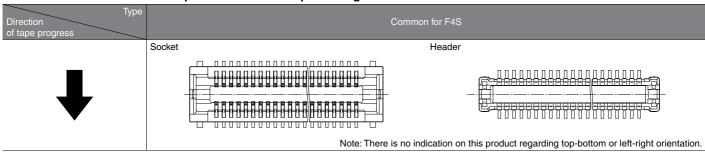



CONNECTOR FOR INSPECTION USAGE APPLICATIONS WITH 3,000 INSERTION AND REMOVAL TIMES

NARROW PITCH CONNECTOR F4S (0.4 mm PITCHES) FOR INSPECTION USAGE



## **FEATURES**

- 1. 3,000 insertion and removals (when as recommended)
- 2. Same external dimensions and foot pattern as standard type.
- 3. Improved mating

Insertion and removal have become easier due to a reduction in the mating retention force required by the simple locking structure and also in the amount of force needed for insertion and removal. (We cannot warrant anything regarding mating retention.)

#### **APPLICATIONS**

Ideal for module unit inspection and equipment assembly inspection

### **Compliance with RoHS Directive**

#### TABLE OF PRODUT TYPES

☆: Available for sale

Product name												Nun	nber c	f cont	acts											
F4S	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	54	60	64	70	80
for inspection	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆

Notes: 1. Please inquire about numbers of contacts other than those given above.

- 2. Please inquire with us regarding delivery times.
- 3. Please keep the minimum unit for ordering no less than 50 pieces per lot.
- 4. Please inquire for further information.

#### **PRODUCT TYPES**

	Specifications	Part No.		Part No.		
Socket	Without positioning bosses	AXT5E**26	Header	Without positioning bosses	AXT6E**26	

Notes: 1. When placing an order, substitute the "\*" (asterisk) in the above part number with the number of contacts for the required connector.

<sup>2.</sup> The above part numbers are for connectors without positioning bosses, which are standard. When ordering connectors with positioning bosses, please contact our sales office.


#### **NOTES**

- 1. If extra resistance to drop impact is required, we recommend using our F4 series.
- 2. Recommended PC board and metal mask patterns


Appropriate control of solder amount is required to minimize solder bridges and other defects for connectors with 0.4-mm or 0.5-mm pitch terminals, which require high-density mounting. Refer to the right-hand drawing for recommended patterns.

#### Socket


Recommended PC board pattern (TOP VIEW)



Recommended metal mask opening pattern
Metal mask thickness: When 150μm
(Terminal opening ratio: 48%)
(Metal-part opening ratio: 100%)




Recommended metal mask opening pattern
Metal mask thickness: When 120µm
(Terminal opening ratio: 60%)
(Metal-part opening ratio: 100%)




#### • Header

Recommended PC board pattern (TOP VIEW)



Recommended metal mask opening pattern
Metal mask thickness: When 150µm
(Terminal opening ratio: 48%)
(Metal-part opening ratio: 100%)




Recommended metal mask opening pattern

Metal mask thickness: When 120

(Torminal opening ratio: 60%)

(Terminal opening ratio: 60%) (Metal-part opening ratio: 100%)



For other details, please verify with the product specification sheets.