

## Low Power Peak EMI Reducing Solution

### Features

- Generates an EMI optimized clock signal at the output.
- Integrated loop filter components.
- Operates with a 3.3V / 2.5V Supply.
- Operating current less than 4mA.
- Low power CMOS design.
- Input frequency range: 6MHz to 12MHz for 2.5V.  
: 6MHz to 13MHz for 3.3V.
- Generates a 1X low EMI spread spectrum clock of the input frequency.
- Frequency deviation:  $\pm 0.65\%$  @ 8MHz
- Available in 6 pin TSOT-23, 8 pin SOIC and 8 pin TSSOP Packages.

### Product Description

The ASM3P2760A is a versatile spread spectrum frequency modulator designed specifically for a wide range of clock frequencies. The ASM3P2760A reduces electromagnetic interference (EMI) at the clock source, allowing system wide reduction of EMI of all clock dependent signals. The ASM3P2760A allows significant system cost savings by reducing the number of circuit board layers ferrite beads, shielding that are traditionally required to pass EMI regulations.

The ASM3P2760A uses the most efficient and optimized modulation profile approved by the FCC and is implemented by using a proprietary all digital method.

The ASM3P2760A modulates the output of a single PLL in order to "spread" the bandwidth of a synthesized clock, and more importantly, decreases the peak amplitudes of its harmonics. This results in significantly lower system EMI compared to the typical narrow band signal produced by oscillators and most frequency generators. Lowering EMI by increasing a signal's bandwidth is called 'spread spectrum clock generation'.


### Applications

The ASM3P2760A is targeted towards all portable devices with very low power requirements like MP3 players and digital still cameras.


### Key Specifications

| Description              | Specification       |
|--------------------------|---------------------|
| Supply voltages          | VDD = 3.3V / 2.5V   |
| Cycle-to-Cycle Jitter    | 200pS (Max)         |
| Output Duty Cycle        | 45/55%              |
| Modulation Rate Equation | $F_{IN}/256$        |
| Frequency Deviation      | $\pm 0.65\%$ @ 8MHz |

### Block Diagram

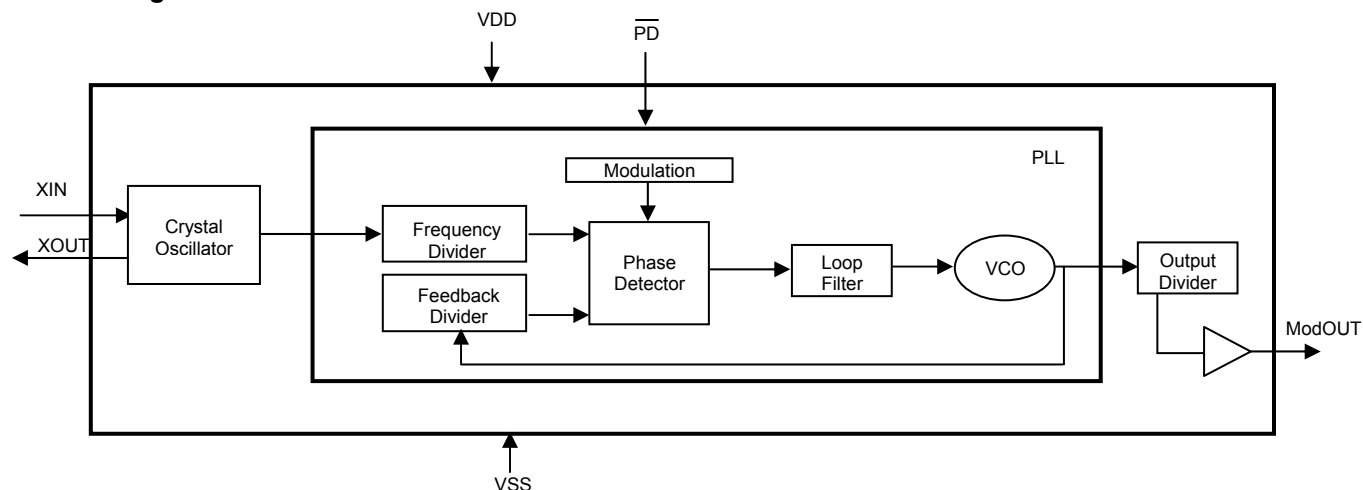

### Pin Configuration (6-pin TSOT-23 Package)

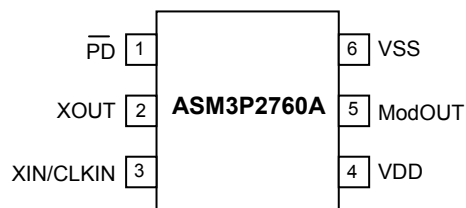


### Pin Description

| Pin# | Pin Name               | Type | Description                                                                                                                                                              |
|------|------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | $\overline{\text{PD}}$ | I    | Power-down control pin. Pull low to enable power-down mode. Connect to VDD if not used.                                                                                  |
| 2    | XOUT                   | O    | Crystal connection. If using an external reference, this pin must be left unconnected.                                                                                   |
| 3    | XIN/CLKIN              | I    | Crystal connection or external reference frequency input. This pin has dual functions. It can be connected either to an external crystal or an external reference clock. |
| 4    | VDD                    | P    | Power supply for the entire chip                                                                                                                                         |
| 5    | ModOUT                 | O    | Spread spectrum clock output.                                                                                                                                            |
| 6    | VSS                    | P    | Ground connection.                                                                                                                                                       |

rev 1.9


### Pin Configuration (8-pin SOIC and TSSOP Packages)

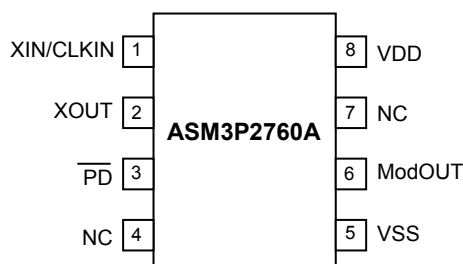

### Pin Description

| Pin# | Pin Name               | Type | Description                                                                                                                                                              |
|------|------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | XIN/CLKIN              | I    | Crystal connection or external reference frequency input. This pin has dual functions. It can be connected either to an external crystal or an external reference clock. |
| 2    | XOUT                   | O    | Crystal connection. If using an external reference, this pin must be left unconnected.                                                                                   |
| 3    | $\overline{\text{PD}}$ | I    | Power-down control pin. Pull low to enable power-down mode. Connect to VDD if not used.                                                                                  |
| 4    | NC                     | -    | No connect.                                                                                                                                                              |
| 5    | VSS                    | P    | Ground connection.                                                                                                                                                       |
| 6    | ModOUT                 | O    | Spread spectrum clock output.                                                                                                                                            |
| 7    | NC                     | -    | No connect.                                                                                                                                                              |
| 8    | VDD                    | P    | Power supply for the entire chip                                                                                                                                         |

### Modulation Profile

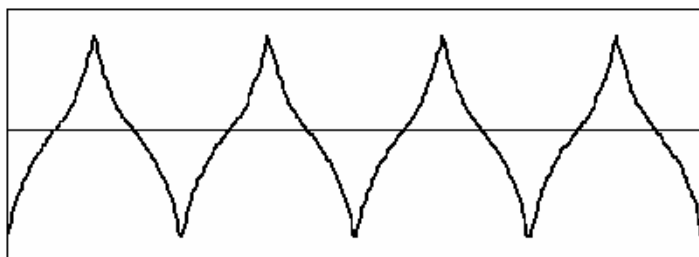

### Specification

| Description         |                 | Specification        |
|---------------------|-----------------|----------------------|
| Frequency Range     | For 2.5V Supply | 6MHz < CLKIN < 12MHz |
|                     | For 3.3V Supply | 6MHz < CLKIN < 13MHz |
| Modulation Equation |                 | $F_{IN}/256$         |
| Frequency Deviation |                 | $\pm 0.65\%$ @ 8MHz  |

rev 1.9

**Absolute Maximum Ratings**

| Symbol               | Parameter                                                | Rating       | Unit |
|----------------------|----------------------------------------------------------|--------------|------|
| VDD, V <sub>IN</sub> | Voltage on any pin with respect to Ground                | -0.5 to +4.6 | V    |
| T <sub>STG</sub>     | Storage temperature                                      | -65 to +125  | °C   |
| T <sub>A</sub>       | Operating temperature                                    | -40 to +85   | °C   |
| T <sub>s</sub>       | Max. Soldering Temperature (10 sec)                      | 260          | °C   |
| T <sub>J</sub>       | Junction Temperature                                     | 150          | °C   |
| T <sub>DV</sub>      | Static Discharge Voltage<br>(As per JEDEC STD22- A114-B) | 2            | KV   |

Note: These are stress ratings only and are not implied for functional use. Exposure to absolute maximum ratings for prolonged periods of time may affect device reliability.

**DC Electrical Characteristics for 2.5V Supply**

(Test condition: All parameters are measured at room temperature (+25°C) unless otherwise stated)

| Symbol           | Parameter                                               | Min     | Typ | Max     | Unit |
|------------------|---------------------------------------------------------|---------|-----|---------|------|
| V <sub>IL</sub>  | Input low voltage                                       | VSS-0.3 | -   | 0.8     | V    |
| V <sub>IH</sub>  | Input high voltage                                      | 2.0     | -   | VDD+0.3 | V    |
| I <sub>IL</sub>  | Input low current                                       | -       | -   | -35     | μA   |
| I <sub>IH</sub>  | Input high current                                      | -       | -   | 35      | μA   |
| I <sub>XOL</sub> | XOUT output low current (@0.5V, VDD=2.5V)               | -       | 3   | -       | mA   |
| I <sub>XOH</sub> | XOUT output high current (@1.8V, VDD=2.5V)              | -       | 3   | -       | mA   |
| V <sub>OL</sub>  | Output low voltage (VDD = 2.5V, I <sub>OL</sub> = 8mA)  | -       | -   | 0.6     | V    |
| V <sub>OH</sub>  | Output high voltage (VDD = 2.5V, I <sub>OH</sub> = 8mA) | 1.8     | -   | -       | V    |
| I <sub>DD</sub>  | Static supply current*                                  | -       | -   | 10      | μA   |
| I <sub>CC</sub>  | Dynamic supply current (2.5V, 8MHz and no load)         | -       | 2.5 | -       | mA   |
| VDD              | Operating Voltage                                       | 2.375   | 2.5 | 2.625   | V    |
| t <sub>ON</sub>  | Power-up time (first locked cycle after power-up)**     | -       | -   | 5       | mS   |
| Z <sub>OUT</sub> | Output impedance                                        | -       | 50  | -       | Ω    |

\* XIN/CLKIN pin and PD pin are pulled low  
 \*\* V<sub>DD</sub> and XIN/CLKIN input are stable, PD pin is made high from low.

**AC Electrical Characteristics for 2.5V Supply**

| Symbol            | Parameter                                     | Min                     | Typ | Max   | Unit |
|-------------------|-----------------------------------------------|-------------------------|-----|-------|------|
| CLKIN             | Input frequency                               | 6                       | -   | 12    | MHz  |
| ModOUT            | Output frequency                              | 6                       | -   | 12    | MHz  |
| f <sub>d</sub>    | Frequency Deviation                           | Input Frequency = 6MHz  |     | -     | %    |
|                   |                                               | Input Frequency = 12MHz |     | ±0.45 |      |
| t <sub>LH</sub> * | Output rise time (measured from 0.7V to 1.7V) | 0.4                     | 1.2 | 1.4   | nS   |
| t <sub>HL</sub> * | Output fall time (measured from 1.7V to 0.7V) | 0.4                     | 0.9 | 1.1   | nS   |
| t <sub>JC</sub>   | Jitter (cycle to cycle)                       | -                       | -   | 200   | pS   |
| t <sub>D</sub>    | Output duty cycle                             | 45                      | 50  | 55    | %    |

\* t<sub>LH</sub> and t<sub>HL</sub> are measured into a capacitive load of 15pF

rev 1.9

### DC Electrical Characteristics for 3.3V Supply

(Test condition: All parameters are measured at room temperature (+25°C) unless otherwise stated.)

| Symbol           | Parameter                                                | Min       | Typ | Max       | Unit |
|------------------|----------------------------------------------------------|-----------|-----|-----------|------|
| V <sub>IL</sub>  | Input low voltage                                        | VSS - 0.3 | -   | 0.8       | V    |
| V <sub>IH</sub>  | Input high voltage                                       | 2.0       | -   | VDD + 0.3 | V    |
| I <sub>IL</sub>  | Input low current                                        | -         | -   | -35       | μA   |
| I <sub>IH</sub>  | Input high current                                       | -         | -   | 35        | μA   |
| I <sub>XOL</sub> | XOUT output low current (@0.4V, VDD=3.3V)                | -         | 3   | -         | mA   |
| I <sub>XOH</sub> | XOUT output high current (@2.5V, VDD=3.3V)               | -         | 3   | -         | mA   |
| V <sub>OL</sub>  | Output low voltage (VDD = 3.3 V, I <sub>OL</sub> = 8mA)  | -         | -   | 0.4       | V    |
| V <sub>OH</sub>  | Output high voltage (VDD = 3.3 V, I <sub>OH</sub> = 8mA) | 2.5       | -   | -         | V    |
| I <sub>DD</sub>  | Static supply current*                                   | -         | -   | 10        | μA   |
| I <sub>CC</sub>  | Dynamic supply current (3.3V, 8MHz and no load)          | -         | 3.0 | -         | mA   |
| VDD              | Operating Voltage                                        | 2.7       | 3.3 | 3.6       | V    |
| t <sub>ON</sub>  | Power-up time(first locked cycle after power up)**       | -         | -   | 5         | mS   |
| Z <sub>OUT</sub> | Output impedance                                         | -         | 45  | -         | Ω    |

\* XIN/CLKIN pin and  $\overline{\text{PD}}$  pin are pulled low  
 \*\*V<sub>DD</sub> and XIN/CLKIN input are stable; PD pin is made high from low.


### AC Electrical Characteristics for 3.3V Supply

| Symbol            | Parameter                                   | Min                     | Typ | Max  | Unit |
|-------------------|---------------------------------------------|-------------------------|-----|------|------|
| CLKIN             | Input frequency                             | 6                       | -   | 13   | MHz  |
| ModOUT            | Output frequency                            | 6                       | -   | 13   | MHz  |
| f <sub>d</sub>    | Frequency Deviation                         | Input Frequency = 6MHz  | -   | ±1.0 | %    |
|                   |                                             | Input Frequency = 13MHz | -   | ±0.4 |      |
| t <sub>LH</sub> * | Output rise time (measured at 0.8V to 2.0V) | 0.5                     | 1.3 | 1.5  | nS   |
| t <sub>HL</sub> * | Output fall time (measured at 2.0V to 0.8V) | 0.4                     | 1.0 | 1.2  | nS   |
| t <sub>JC</sub>   | Jitter (cycle to cycle)                     | -                       | -   | 200  | pS   |
| t <sub>D</sub>    | Output duty cycle                           | 45                      | 50  | 55   | %    |

\*t<sub>LH</sub> and t<sub>HL</sub> are measured into a capacitive load of 15pF

rev 1.9

### Typical Crystal Oscillator Circuit

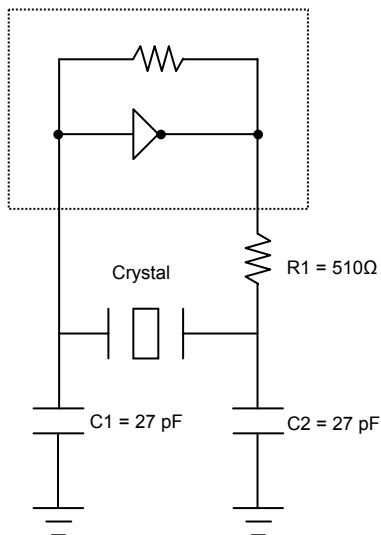


### Typical Crystal Specifications

| Fundamental AT cut parallel resonant crystal |                           |
|----------------------------------------------|---------------------------|
| Nominal frequency                            | 8.000MHz                  |
| Frequency tolerance                          | ± 50ppm or better at 25°C |
| Operating temperature range                  | -25°C to +85°C            |
| Storage temperature                          | -40°C to +85°C            |
| Load capacitance                             | 18pF                      |
| Shunt capacitance                            | 7pF maximum               |
| ESR                                          | 25Ω                       |


rev 1.9

**Package Information**

**6-pin TSOT-23 Package**

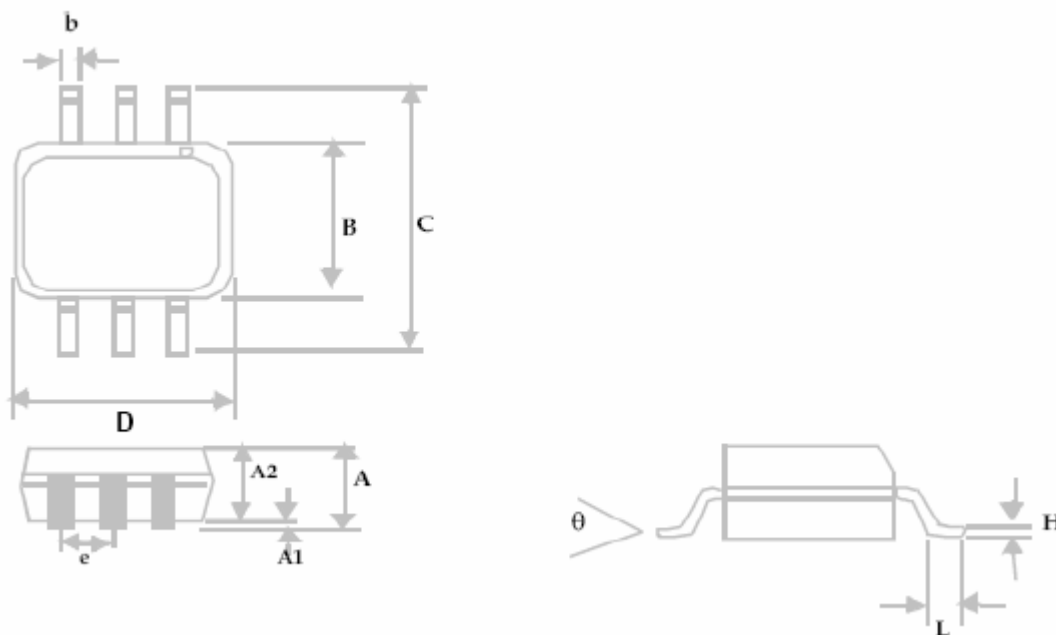


| Symbol | Dimensions |       |             |      |
|--------|------------|-------|-------------|------|
|        | Inches     |       | Millimeters |      |
|        | Min        | Max   | Min         | Max  |
| A      |            | 0.04  |             | 1.00 |
| A1     | 0.00       | 0.004 | 0.00        | 0.10 |
| A2     | 0.033      | 0.036 | 0.84        | 0.90 |
| b      | 0.012      | 0.02  | 0.30        | 0.50 |
| H      | 0.005 BSC  |       | 0.127 BSC   |      |
| D      | 0.114 BSC  |       | 2.90 BSC    |      |
| B      | 0.06 BSC   |       | 1.60 BSC    |      |
| e      | 0.0374 BSC |       | 0.950 BSC   |      |
| C      | 0.11 BSC   |       | 2.80 BSC    |      |
| L      | 0.0118     | 0.02  | 0.30        | 0.50 |
| θ      | 0°         | 4°    | 0°          | 4°   |

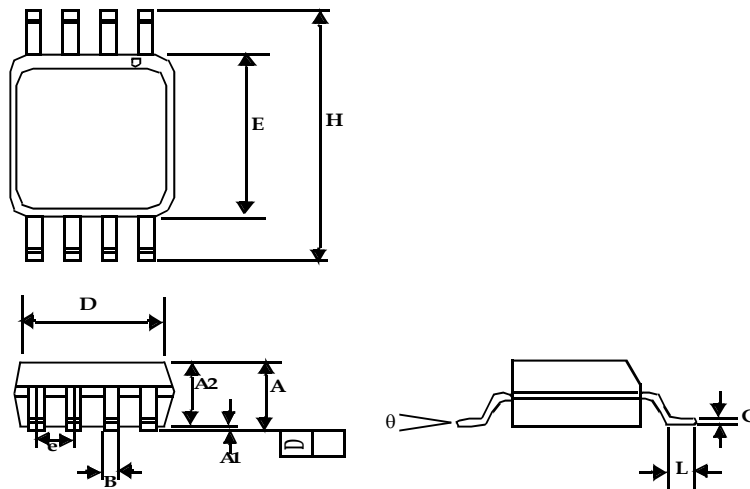**8-Pin SOIC Package**


| Symbol | Dimensions |       |             |      |
|--------|------------|-------|-------------|------|
|        | Inches     |       | Millimeters |      |
|        | Min        | Max   | Min         | Max  |
| A1     | 0.004      | 0.010 | 0.10        | 0.25 |
| A      | 0.053      | 0.069 | 1.35        | 1.75 |
| A2     | 0.049      | 0.059 | 1.25        | 1.50 |
| B      | 0.012      | 0.020 | 0.31        | 0.51 |
| C      | 0.007      | 0.010 | 0.18        | 0.25 |
| D      | 0.193 BSC  |       | 4.90 BSC    |      |
| E      | 0.154 BSC  |       | 3.91 BSC    |      |
| e      | 0.050 BSC  |       | 1.27 BSC    |      |
| H      | 0.236 BSC  |       | 6.00 BSC    |      |
| L      | 0.016      | 0.050 | 0.41        | 1.27 |
| theta  | 0°         | 8°    | 0°          | 8°   |

**8-Pin TSSOP Package**

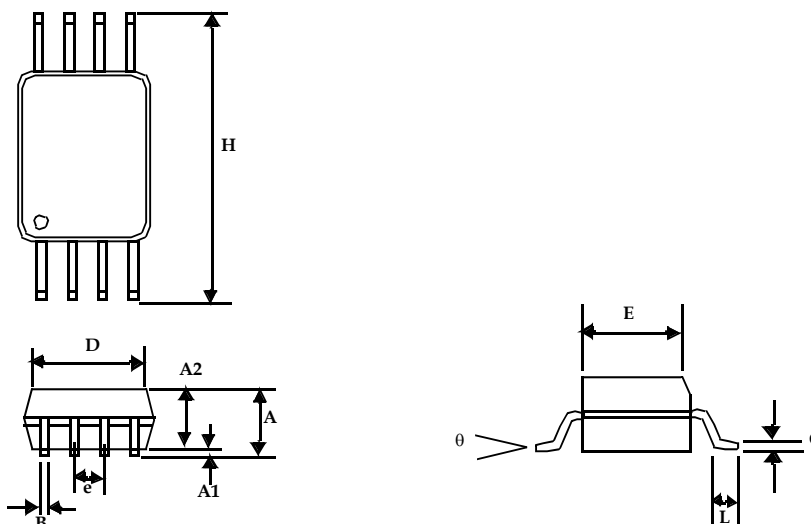

| Symbol | Dimensions |       |             |      |
|--------|------------|-------|-------------|------|
|        | Inches     |       | Millimeters |      |
|        | Min        | Max   | Min         | Max  |
| A      |            | 0.043 |             | 1.10 |
| A1     | 0.002      | 0.006 | 0.05        | 0.15 |
| A2     | 0.033      | 0.037 | 0.85        | 0.95 |
| B      | 0.008      | 0.012 | 0.19        | 0.30 |
| c      | 0.004      | 0.008 | 0.09        | 0.20 |
| D      | 0.114      | 0.122 | 2.90        | 3.10 |
| E      | 0.169      | 0.177 | 4.30        | 4.50 |
| e      | 0.026 BSC  |       | 0.65 BSC    |      |
| H      | 0.252 BSC  |       | 6.40 BSC    |      |
| L      | 0.020      | 0.028 | 0.50        | 0.70 |
| θ      | 0°         | 8°    | 0°          | 8°   |

**Ordering Information**

| Part Number      | Marking  | Package Type                        | Temperature |
|------------------|----------|-------------------------------------|-------------|
| ASM3P2760AF-06OR | E4LL     | 6-Pin TSOT-23, TAPE & REEL, Pb Free | Commercial  |
| ASM3P2760AF-08TT | 3P2760AF | 8-Pin TSSOP, TUBE, Pb Free          | Commercial  |
| ASM3P2760AF-08TR | 3P2760AF | 8-Pin TSSOP, TAPE & REEL, Pb Free   | Commercial  |
| ASM3P2760AF-08ST | 3P2760AF | 8-Pin SOIC, TUBE, Pb Free           | Commercial  |
| ASM3P2760AF-08SR | 3P2760AF | 8-Pin SOIC, TAPE & REEL, Pb Free    | Commercial  |
| ASM3P2760AG-06OR | E3LL     | 6-Pin TSOT-23, TAPE & REEL, Green   | Commercial  |
| ASM3P2760AG-08TT | 3P2760AG | 8-Pin TSSOP, TUBE, Green            | Commercial  |
| ASM3P2760AG-08TR | 3P2760AG | 8-Pin TSSOP, TAPE & REEL, Green     | Commercial  |
| ASM3P2760AG-08ST | 3P2760AG | 8-Pin SOIC, TUBE, Green             | Commercial  |
| ASM3P2760AG-08SR | 3P2760AG | 8-Pin SOIC, TAPE & REEL, Green      | Commercial  |
| ASM3I2760AF-06OR | E5LL     | 6-Pin TSOT-23, TAPE & REEL, Pb Free | Industrial  |
| ASM3I2760AF-08TT | 3I2760AF | 8-Pin TSSOP, TUBE, Pb Free          | Industrial  |
| ASM3I2760AF-08TR | 3I2760AF | 8-Pin TSSOP, TAPE & REEL, Pb Free   | Industrial  |
| ASM3I2760AF-08ST | 3I2760AF | 8-Pin SOIC, TUBE, Pb Free           | Industrial  |
| ASM3I2760AF-08SR | 3I2760AF | 8-Pin SOIC, TAPE & REEL, Pb Free    | Industrial  |
| ASM3I2760AG-06OR | E6LL     | 6-Pin TSOT-23, TAPE & REEL, Green   | Industrial  |
| ASM3I2760AG-08TT | 3I2760AG | 8-Pin TSSOP, TUBE, Green            | Industrial  |
| ASM3I2760AG-08TR | 3I2760AG | 8-Pin TSSOP, TAPE & REEL, Green     | Industrial  |
| ASM3I2760AG-08ST | 3I2760AG | 8-Pin SOIC, TUBE, Green             | Industrial  |
| ASM3I2760AG-08SR | 3I2760AG | 8-Pin SOIC, TAPE & REEL, Green      | Industrial  |

## Device Ordering Information

A S M 3 P 2 7 6 0 A F - 0 8 T R

R = Tape & Reel, T = Tube or Tray

|            |           |          |
|------------|-----------|----------|
| O = TSOT23 | U = MSOP  | J=TSOT26 |
| S = SOIC   | E = TQFP  |          |
| T = TSSOP  | L = LQFP  |          |
| A = SSOP   | U = MSOP  |          |
| V = TVSOP  | P = PDIP  |          |
| B = BGA    | D = QSOP  |          |
| Q = QFN    | X = SC-70 |          |

DEVICE PIN COUNT

F = LEAD FREE AND RoHS COMPLIANT PART  
G = GREEN PACKAGE, LEAD FREE, and RoHS

PART NUMBER

|                                  |                                 |                                       |
|----------------------------------|---------------------------------|---------------------------------------|
| X= Automotive<br>(-40C to +125C) | I= Industrial<br>(-40C to +85C) | P or n/c = Commercial<br>(0C to +70C) |
|----------------------------------|---------------------------------|---------------------------------------|

|                           |                      |
|---------------------------|----------------------|
| 1 = Reserved              | 6 = Power Management |
| 2 = Non PLL based         | 7 = Power Management |
| 3 = EMI Reduction         | 8 = Power Management |
| 4 = DDR support products  | 9 = Hi Performance   |
| 5 = STD Zero Delay Buffer | 0 = Reserved         |

PulseCore Semiconductor Mixed Signal Product



PulseCore Semiconductor Corporation  
1715 S. Bascom Ave Suite 200  
Campbell, CA 95008  
Tel: 408-879-9077  
Fax: 408-879-9018  
[www.pulsecoresemi.com](http://www.pulsecoresemi.com)

Copyright © PulseCore Semiconductor  
All Rights Reserved  
Part Number: ASM3P2760A  
Document Version: 1.9

Note: This product utilizes US Patent # 6,646,463 Impedance Emulator Patent issued to PulseCore Semiconductor, dated 11-11-2003

© Copyright 2007 PulseCore Semiconductor Corporation. All rights reserved. Our logo and name are trademarks or registered trademarks of PulseCore Semiconductor. All other brand and product names may be the trademarks of their respective companies. PulseCore reserves the right to make changes to this document and its products at any time without notice. PulseCore assumes no responsibility for any errors that may appear in this document. The data contained herein represents PulseCore's best data and/or estimates at the time of issuance. PulseCore reserves the right to change or correct this data at any time, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or warranty to any user or customer. PulseCore does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of PulseCore products including liability or warranties related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as express agreed to in PulseCore's Terms and Conditions of Sale (which are available from PulseCore). All sales of PulseCore products are made exclusively according to PulseCore's Terms and Conditions of Sale. The purchase of products from PulseCore does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of PulseCore or third parties. PulseCore does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of PulseCore products in such life-supporting systems implies that the manufacturer assumes all risk of such use and agrees to indemnify PulseCore against all claims arising from such use.