

**PRELIMINARY****Dual Video Amplifier with LPF****■ DESCRIPTION**


AA8642 is a dual low pass filter video amplifier with 6db gain, 75Ω output buffer and SAG correction. The 75Ω buffer is capable of driving two circuits. The SAG could reduce the output coupling capacitor. It supports 3V and 5V operation voltage and incorporates high performance 4-stage LPF which is ideal for removing DAC sampling noise. The power saving circuit provides the power saving function. The IC is available in **8-pin TSSOP (AA8642AP)**, **8-pin SOP (AA8642SP)** and **8-pin DIP (AA8642PP)** package.

■ FEATURES

1. Composite video driver with 6dB gain
2. Support 3V and 5V operation voltage
3. Built-in high performance 4-stage LPF
4. Dual channels video amplifier
5. SAG correction function
6. A load sufficient for driving two circuits
7. Low operating current, 18mA typical
8. Internal voltage clamp circuit
9. AC-Couple or DC-Couple output

■ APPLICATION

- VCR
- Video Camera
- TV
- Video Player

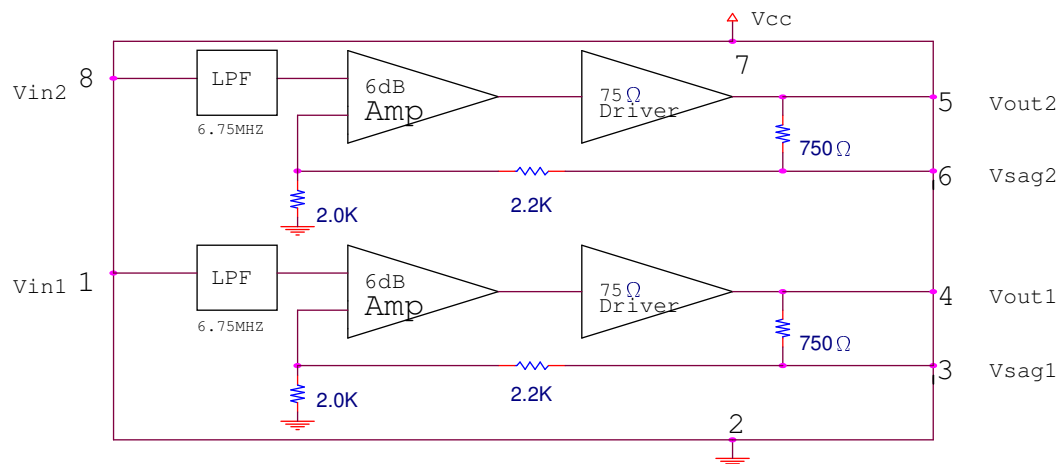■ AA8642 BLOCK DIAGRAM

**PRELIMINARY****Dual Video Amplifier with LPF****■ PIN DESCRIPTION**

Symbol	Pin No	Type	Function
Vin1	1	I	Channel1 input terminal of 1V composite signal
GND	2	-	Ground
Vsag1	3	O	Channel 1 SAG correction output
Vout1	4	O	Channel 1 output
Vout2	5	O	Channel 2 output
Vsag2	6	O	Channel 2 SAG correction output
VCC	7	-	3V or 5V power supply
Vin2	8	I	Channel 2 input terminal of 1V composite signal

■ ABSOLUTE MAXIMUM RATING

Ta = 25 °C

Parameter	Symbol	Rating			UNIT	CONDITION
		MIN	TYP	MAX		
Supply Voltage	Vcc	-0.3	3	7	V	
Operating Ambient Temperature	Ta	-25		75	°C	
Storage Temperature	Ts	-40		125	°C	

NOTE : Stress above those listed under “Absolute Maximum Rating” may cause device permanent damage to the device. This stress-rating only factor and functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for an extended period of time may affect device reliability of the device.



PRELIMINARY

Dual Video Amplifier with LPF

■ **ELECTRICAL CHARACTERISTICS**

$T_a = 25^{\circ}\text{C}$, $V_{cc} = 3\text{V}$


Parameter	Symbol	Min	Typ	Max	Unit	Condition
Supply Current	I _{cc}		17	20	mA	No input Signal
Voltage Gain	G _v	5.5	6	6.5	dB	Input Signal Freq = 4.43MHz, 1V _{P-P} , measure V _{O1}
Frequency characteristic 1	F _{c1}			-5	dB	SIN wave : 1V 6.75MHz/100kHz
Frequency characteristic 2	F _{c2}		-25		dB	SIN wave : 1V 6.75MHz/100kHz
Output DC level		1.0	1.2	1.4	V	
SAG-Terminal Gain	G _{SAG}	35	45		dB	
Differential Gain	DG		1	3	%	V _{IN} = 1V _{P-P} , refer staircase signal
Differential Phase	DP		1	3	deg	V _{IN} = 1V _{P-P} , refer staircase signal
Crosstalk	CT		-70		dB	V _{IN} =1V 4.43M Sinewave



PRELIMINARY

Dual Video Amplifier with LPF

MEASUREMENT CIRCUIT

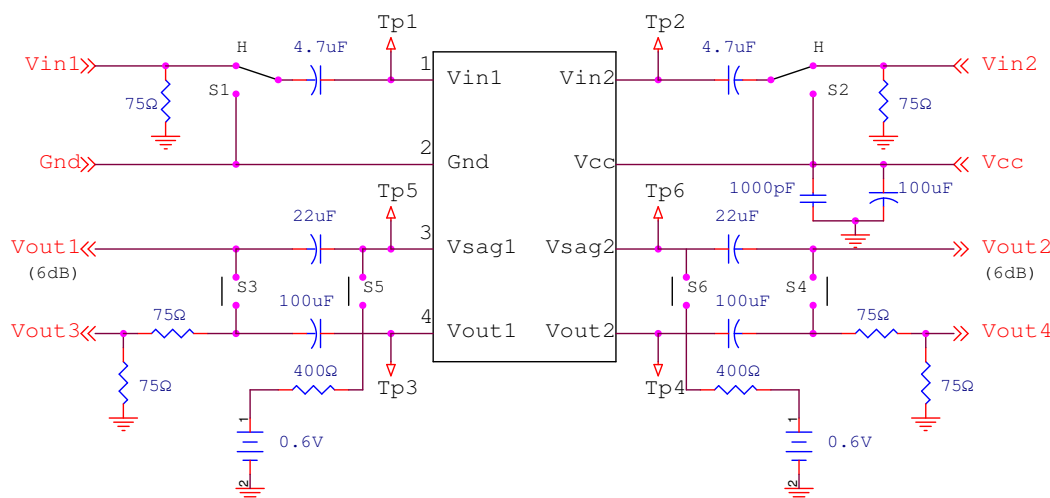


TEST METHODES							
PARAMETER	SYMBOL	SWITCH CONDITIONS					
		S1	S2	S3	S4	S5	S6
Supply Current	Icc	H	H				
Voltage Gain	Gv	H	H	ON	ON		
Frequency Characteristic	Gf	H	H	ON	ON		
Differential Gain	DG	H	H	ON	ON		
Differential Phase	DP	H	H	ON	ON		
Crosstalk	CT	H	L	ON	ON		
Gain Offset	Gch	H	H	ON	ON		
Input Clamp Voltage	Vcl	H	H				
SAG Terminal Gain	Gsag	H	H				
		H	H				
		H	H			ON	ON




PRELIMINARY

Dual Video Amplifier

■ APPLICATION CIRCUIT 1 – AC-Couple output

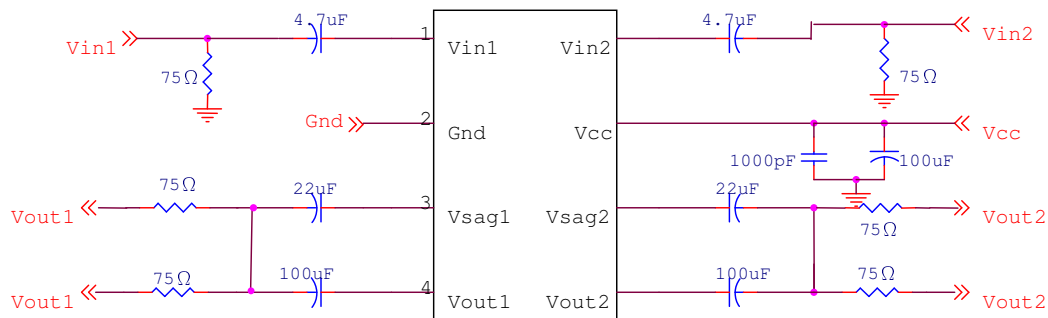

■ MEASUREMENT CIRCUIT 2 – DC-Couple output

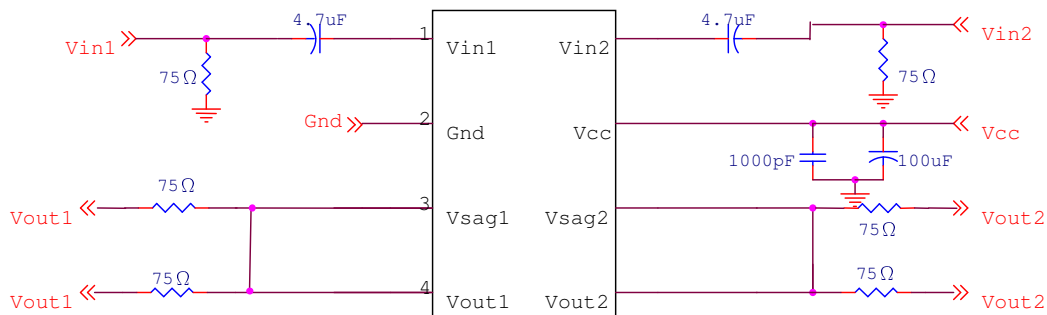




PRELIMINARY

Dual Video Amplifier with LPF

■ TSSOP 8L – AA8642AP –PACKAGE DIMENSION

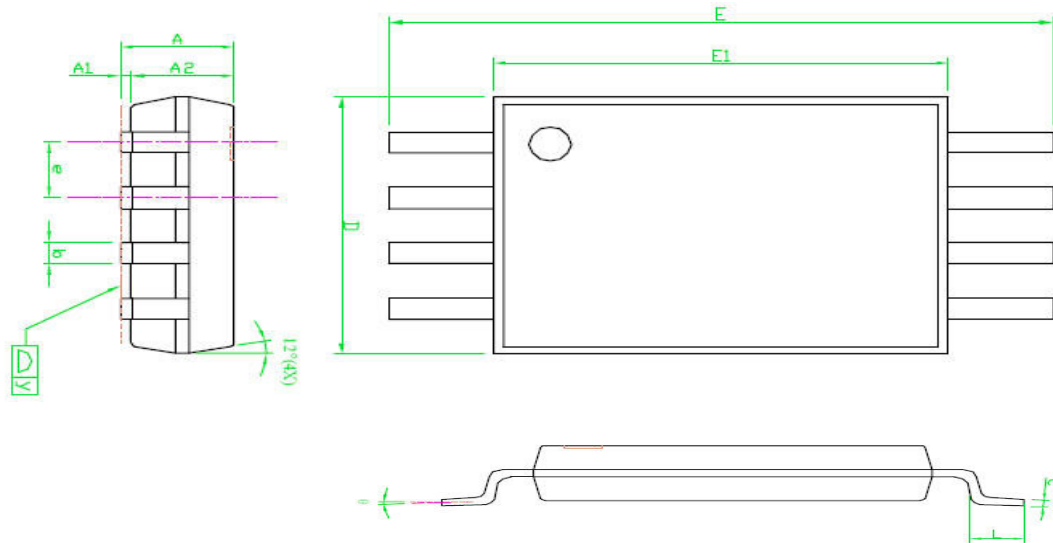

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	---	---	1.20	---	---	0.048
A1	0.05	---	0.15	0.002	---	0.006
A2	0.80	1.00	1.05	0.031	0.039	0.041
b	0.19	---	0.30	0.007	---	0.012
C	0.09	---	0.20	0.004	---	0.008
D	2.90	3.00	3.10	0.114	0.118	0.122
E	6.20	6.40	6.60	0.244	0.252	0.260
E1	4.30	4.40	4.50	0.169	0.173	0.177
e	---	0.65	---	---	0.026	---
L	0.45	0.60	0.75	0.018	0.024	0.030
y	---	---	0.10	---	---	0.004
θ	0°	---	8°	0°	---	8°

NOTES:




1. Package body sizes exclude mold flash protrusions or gate burrs
2. Tolerance ± 0.1 mm (4 mil) unless otherwise specified
3. Coplanarity: 0.1 mm
4. Controlling dimension is millimeter whereas converted inch dimensions are not necessarily exact
5. Followed from jedec mo-153



PRELIMINARY

Dual Video Amplifier with LPF

■ SOP-8 – AA8642SP – PACKAGE DIMENSION

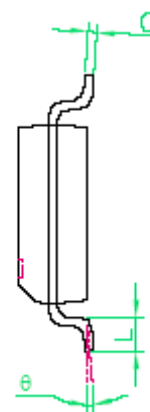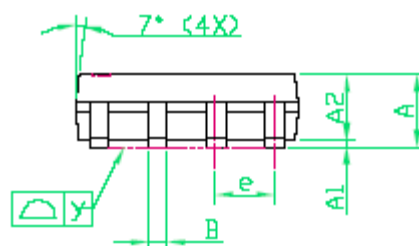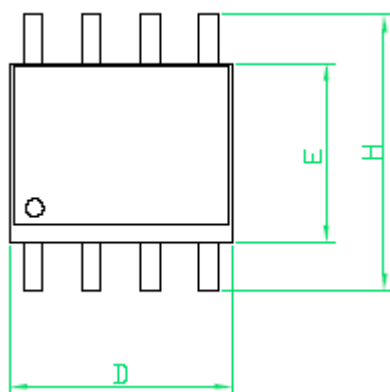

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.35	1.60	1.75	0.053	0.063	0.069
A1	0.10	---	0.25	0.004	---	0.010
A2	---	1.45	---	---	0.057	---
b	0.33	---	0.51	0.013	---	0.020
C	0.19	---	0.25	0.007	---	0.010
D	4.80	---	5.00	0.189	---	0.197
E	3.80	---	4.00	0.150	---	0.157
e	---	1.27	---	---	0.050	---
H	5.80	---	6.20	0.228	---	0.244
L	0.40	---	1.27	0.016	---	0.050
y	---	---	0.10	---	---	0.004
θ	0°	---	8°	0°	---	8°

NOTES:


1. Package body sizes exclude moldflash protrusions or gate burns.
2. Tolerance $\pm 0.1 \text{ mm}$ (4 mil) unless otherwise specified
3. Coplanarity: 0.1 mm
4. Controlling dimension is millimeter converted inch dimensions are not necessarily exact
5. Followed from JEDEC MS-012




PRELIMINARY

Dual Video Amplifier with LPF

■ DIP-8 – AA8642PP – PACKAGE DIMENSION

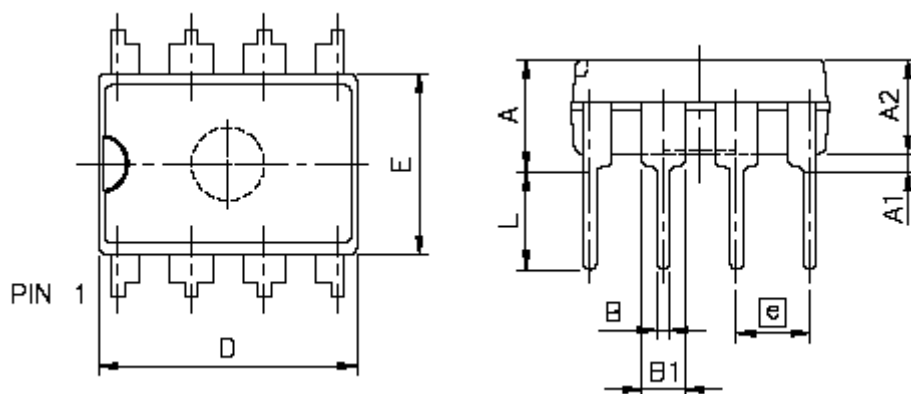

SYMBOL	DIMENSION IN INCH	DIMENSION IN MM
A	0.170 MAX.	4.318 MAX.
A1	0.015 MIN.	0.381 MIN.
A2	0.130±0.005	3.302±0.127
B	0.018 TYP.	0.457 TYP.
B1	0.060 TYP.	1.524 TYP.
C	0.010 NOM.	0.254 NOM.
D	0.362±0.005	9.195±0.127
E	0.252±0.005	6.401±0.127
E1	0.300±0.010	7.62±0.254
EA	0.355±0.020	9.017±0.508
e	0.100 TYP.	2.540 TYP.
L	0.130±0.010	3.302±0.254
θ	0°~15°	0°~15°

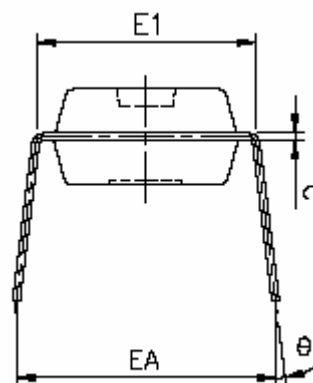

NOTE:

1.DIMENSION D & E DOES NOT INCLUDE FLASH.