

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0015475174

Status:


Active

Overview:

cgrid_sl_products

Description:

2.54mm (.100") Pitch SL™ FFC/FPC Connector - Single Row Male Version D, 17 Circuits

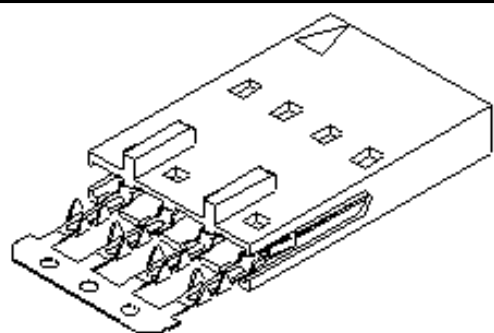

Series

image - Reference only

Documents:

3D Model

Drawing (PDF)

Product Specification PS-70430 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

FFC/FPC Connectors

Series

70431

Comments

Male

Overview

cgrid_sl_products

Product Name

SL™

Physical

Circuits (Loaded)

17

Contact Position

N/A

Durability (mating cycles max)

50

Entry Angle

Vertical

Flammability

94V-0

Number of Rows

1

Orientation

Vertical

PCB Locator

No

PCB Retention

None

Packaging Type

Tube

Pitch - Mating Interface (in)

0.100 In

Pitch - Mating Interface (mm)

2.54 mm

Polarized to PCB

No

Stackable

Yes

Surface Mount Compatible (SMC)

N/A

Temperature Range - Operating

-40°C to +105°C

Termination Interface: Style

IDT or Pierce

Wire/Cable Type

FFC/FPC

Electrical

Current - Maximum per Contact

2A

Voltage - Maximum

250V

Material Info

Reference - Drawing Numbers

Product Specification

PS-70430

Sales Drawing

SDA-70431-****

EU RoHS

China RoHS

Compliance Status

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)


Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series



70431Series

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

OPTION -A-


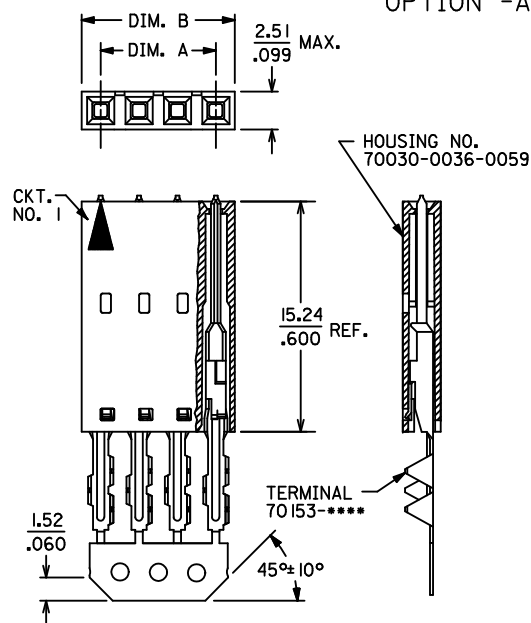


OPTION -D-

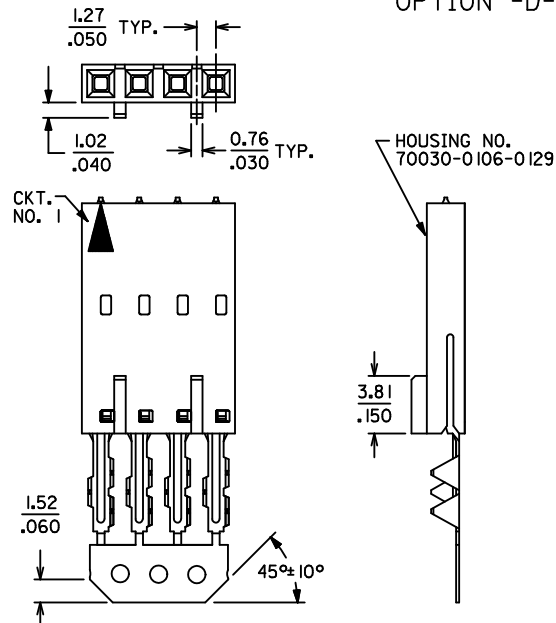

OPTIONAL CORE-OUT FOR
HOUSING OPTIONS A & D
CKT. SIZES 2-25
(FOR CONTROL OF BOW)

OPTION -G-

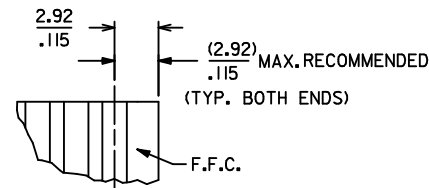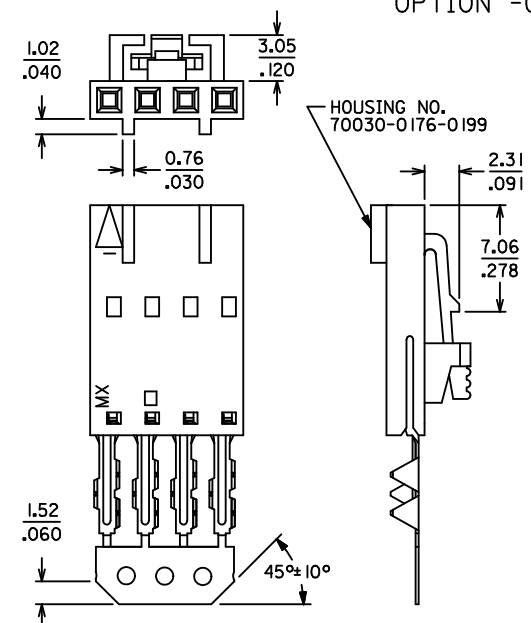

- NOTES:
1. HOUSING: POLYESTER (PBT), UL94 V-0
COLOR: BLACK
 2. FINISHES:
SEE PAGE 2 FOR PLATING FINISHES
 3. PRODUCT SPECIFICATION: PS-70430
 4. PACKAGING SPECIFICATION: PK-70873-0001
 5. SEE CHART FOR CIRCUIT SIZES
 6. TERMINALS ARE SHOWN PRE-LOADED INTO HOUSING
AND LOCKED INTO FIRST ROW OF LOCKING TANG
WINDOWS
 7. ALL DIMENSIONS ARE FOR REFERENCE ONLY
 8. SEE SHEET 2 FOR PART NUMBERS AND PLATINGS

CKT. SIZE	DIM. A (MAX.)	DIM. B (MAX.)
2	(2.54) .100	(5.05) .199
3	(5.08) .200	(7.59) .299
4	(7.62) .300	(10.13) .399
5	(10.16) .400	(12.67) .499
6	(12.70) .500	(15.21) .599
7	(15.24) .600	(17.75) .699
8	(17.78) .700	(20.29) .799
9	(20.32) .800	(22.83) .899
10	(22.86) .900	(25.37) .999
11	(25.40) 1.000	(27.91) 1.099
12	(27.94) 1.100	(30.45) 1.199
13	(30.48) 1.200	(32.99) 1.299
14	(33.02) 1.300	(35.53) 1.399
15	(35.56) 1.400	(38.07) 1.499
16	(38.10) 1.500	(40.61) 1.599
17	(40.64) 1.600	(43.15) 1.699
18	(43.18) 1.700	(45.69) 1.799
19	(45.72) 1.800	(48.23) 1.899
20	(48.26) 1.900	(50.77) 1.999
21	(50.80) 2.000	(53.31) 2.099
22	(53.34) 2.100	(55.85) 2.199
23	(55.88) 2.200	(58.39) 2.299
24	(58.42) 2.300	(60.93) 2.399
25	(60.96) 2.400	(63.47) 2.499

REV	DESCRIPTION	DATE	BY	APPR.
1	MODIFY PRODUCT SPEC	2009/12/28	UCP2010-0987	
2	DRWN:MSIBARRA	2010/01/08		
3	CHKD:DMORGAN	2010/01/11		
4	APPR:SMILLER			

GENERAL TOLERANCES (UNLESS SPECIFIED)	QUALITY SYMBOLS
4 PLACES ± ---	▽ = 0
3 PLACES ± ---	▽ = 0
2 PLACES ± ---	▽ = 0
1 PLACE ± ---	▽ = 0
ANGULAR ± 1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	SCALE	DESIGN UNITS
MM/IN	4:1	INCH
DRAWN BY	DATE	TITLE
MGB	12/21/88	ASSY, SL CONNECTOR, FFC
CHECKED BY	DATE	MALE, SINGLE ROW
MGB	12/21/88	2.54/.100 GRID
APPROVED BY	DATE	
WAZ	12/21/88	
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE TABLE	SDA-70431-****	1 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
--

	13	12	11	10	9	8	7	6	5	4	3	2	1																																																								
J	CKT. SIZE	TIN PLATE OPTION -A-		TIN PLATE OPTION -D-		15 GOLD PLATE OPTION -A-		15 GOLD PLATE OPTION -D-		30 GOLD PLATE OPTION -A-		30 GOLD PLATE OPTION -D-		TIN PLATE OPTION -G-																																																							
		EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.																																																						
	2	I5-38-9020	A-70431-0001	I5-38-9022	A-70431-0071	I5-47-4028	A-70431-0176	I5-47-5020	A-70431-0246	I5-47-5022	A-70431-0351	I5-47-5024	A-70431-0421																																																								
	3	-9030	-0002	-9032	-0072	-4038	-0177	-5030	-0247	-5032	-0352	-5034	-0422																																																								
	4	-9040	-0003	-9042	-0073	-4048	-0178	-5040	-0248	-5042	-0353	-5044	-0423																																																								
I	5	-9050	-0004	-9052	-0074	-4058	-0179	-5050	-0249	-5052	-0354	-5054	-0424																																																								
	6	-9060	-0005	-9062	-0075	-4068	-0180	-5060	-0250	-5062	-0355	-5064	-0425																																																								
	7	-9070	-0006	-9072	-0076	-4078	-0181	-5070	-0251	-5072	-0356	-5074	-0426																																																								
	8	-9080	-0007	-9082	-0077	-4088	-0182	-5080	-0252	-5082	-0357	-5084	-0427																																																								
	9	-9090	-0008	-9092	-0078	-4098	-0183	-5090	-0253	-5092	-0358	-5094	-0428																																																								
	10	-9100	-0009	-9102	-0079	-4108	-0184	-5100	-0254	-5102	-0359	-5104	-0429	I5-38-9103	A-70431-0149																																																						
	11	-9110	-0010	-9112	-0080	-4118	-0185	-5110	-0255	-5112	-0360	-5114	-0430																																																								
H	12	-9120	-0011	-9122	-0081	-4128	-0186	-5120	-0256	-5122	-0361	-5124	-0431																																																								
	13	-9130	-0012	-9132	-0082	-4138	-0187	-5130	-0257	-5132	-0362	-5134	-0432																																																								
	14	-9140	-0013	-9142	-0083	-4148	-0188	-5140	-0258	-5142	-0363	-5144	-0433																																																								
	15	-9150	-0014	-9152	-0084	-4158	-0189	-5150	-0259	-5152	-0364	-5154	-0434																																																								
	16	-9160	-0015	-9162	-0085	-4168	-0190	-5160	-0260	-5162	-0365	-5164	-0435																																																								
	17	-9170	-0016	-9172	-0086	-4178	-0191	-5170	-0261	-5172	-0366	-5174	-0436																																																								
G	18	-9180	-0017	-9182	-0087	-4188	-0192	-5180	-0262	-5182	-0367	-5184	-0437																																																								
	19	-9190	-0018	-9192	-0088	-4198	-0193	-5190	-0263	-5192	-0368	-5194	-0438																																																								
	20	-9200	-0019	-9202	-0089	-4208	-0194	-5200	-0264	-5202	-0369	-5204	-0439																																																								
	21	-9210	-0020	-9212	-0090	-4218	-0195	-5210	-0265	-5212	-0370	-5214	-0440																																																								
	22	-9220	-0021	-9222	-0091	-4228	-0196	-5220	-0266	-5222	-0371	-5224	-0441																																																								
	23	-9230	-0022	-9232	-0092	-4238	-0197	-5230	-0267	-5232	-0372	-5234	-0442																																																								
	24	-9240	-0023	-9242	-0093	-4248	-0198	-5240	-0268	-5242	-0373	-5244	-0443																																																								
F	25	I5-38-9250	A-70431-0024	I5-38-9252	A-70431-0094	I5-47-4258	A-70431-0199	I5-47-5250	A-70431-0269	I5-47-5252	A-70431-0374	I5-47-5254	A-70431-0444																																																								
<table><tr><td>PLATING PER ES-88:</td><td>CARRIER STRIP COLOR CODE</td></tr><tr><td>TIN</td><td>NONE</td></tr><tr><td>15 GOLD</td><td>YELLOW</td></tr><tr><td>30 GOLD</td><td>RED</td></tr></table> PLATING CHART PER ES-88-*** TIN: TIN OVERALL THICKNESS: 3.81 MICROMETERS (150 MICROINCHES) MINIMUM ALL OVER A NICKEL UNDERPLATE. 15 GOLD: SELECTIVE GOLD (Au) WITH SELECTIVE TIN THICKNESS: 0.38 MICROMETERS (15 MICROINCHES) MINIMUM GOLD (Au) IN SELECT AREA 1.90 MICROMETERS (75 MICROINCHES) MINIMUM TIN IN SELECT AREA ALL OVER A NICKEL UNDERPLATE. 30 GOLD: SELECTIVE GOLD (Au) WITH SELECTIVE TIN THICKNESS: 0.76 MICROMETERS (30 MICROINCHES) MINIMUM GOLD (Au) IN SELECT AREA 1.90 MICROMETERS (75 MICROINCHES) MINIMUM TIN IN SELECT AREA ALL OVER A NICKEL UNDERPLATE.																PLATING PER ES-88:	CARRIER STRIP COLOR CODE	TIN	NONE	15 GOLD	YELLOW	30 GOLD	RED	E																																													
PLATING PER ES-88:	CARRIER STRIP COLOR CODE																																																																				
TIN	NONE																																																																				
15 GOLD	YELLOW																																																																				
30 GOLD	RED																																																																				
D	<table><tr><td rowspan="6">SEE SHEET 1 EC NO: UCP2010-0987 DRAWN:MS BARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11</td><td rowspan="6">QUALITY SYMBOLS ▽=0 ▽=0 ▽=0</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE MM/IN</td><td>SCALE 1:1</td><td>DESIGN UNITS INCH</td><td colspan="2" rowspan="4">THIRD ANGLE PROJECTION</td><td colspan="5" rowspan="4">ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID MOLEX INCORPORATED</td></tr><tr><td>mm</td><td>INCH</td><td>DRAWN BY MGB</td><td>DATE 12/21/88</td></tr><tr><td>4 PLACES ± ---</td><td>± ---</td><td>CHECKED BY MGB</td><td>DATE 12/21/88</td></tr><tr><td>3 PLACES ± ---</td><td>± ---</td><td>APPROVED BY WAZ</td><td>DATE 12/21/88</td></tr><tr><td>2 PLACES ± ---</td><td>± ---</td><td colspan="2">ANGULAR ±1/2°</td><td colspan="2">MATERIAL NO. SEE TABLE</td><td colspan="2" rowspan="2">DOCUMENT NO. SDA-70431-****</td><td colspan="5" rowspan="2">SHEET NO. 2 OF 2</td></tr><tr><td>1 PLACE ± ---</td><td>± ---</td><td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td>SIZE C</td><td colspan="8">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr></table>															SEE SHEET 1 EC NO: UCP2010-0987 DRAWN:MS BARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID MOLEX INCORPORATED					mm	INCH	DRAWN BY MGB	DATE 12/21/88	4 PLACES ± ---	± ---	CHECKED BY MGB	DATE 12/21/88	3 PLACES ± ---	± ---	APPROVED BY WAZ	DATE 12/21/88	2 PLACES ± ---	± ---	ANGULAR ±1/2°		MATERIAL NO. SEE TABLE		DOCUMENT NO. SDA-70431-****		SHEET NO. 2 OF 2					1 PLACE ± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								B
SEE SHEET 1 EC NO: UCP2010-0987 DRAWN:MS BARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID MOLEX INCORPORATED																																																											
		mm	INCH	DRAWN BY MGB	DATE 12/21/88																																																																
		4 PLACES ± ---	± ---	CHECKED BY MGB	DATE 12/21/88																																																																
		3 PLACES ± ---	± ---	APPROVED BY WAZ	DATE 12/21/88																																																																
		2 PLACES ± ---	± ---	ANGULAR ±1/2°		MATERIAL NO. SEE TABLE		DOCUMENT NO. SDA-70431-****		SHEET NO. 2 OF 2																																																											
		1 PLACE ± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																														
A																A																																																					
	12	11	10	9	8	7	6	5	4	3	2	1																																																									