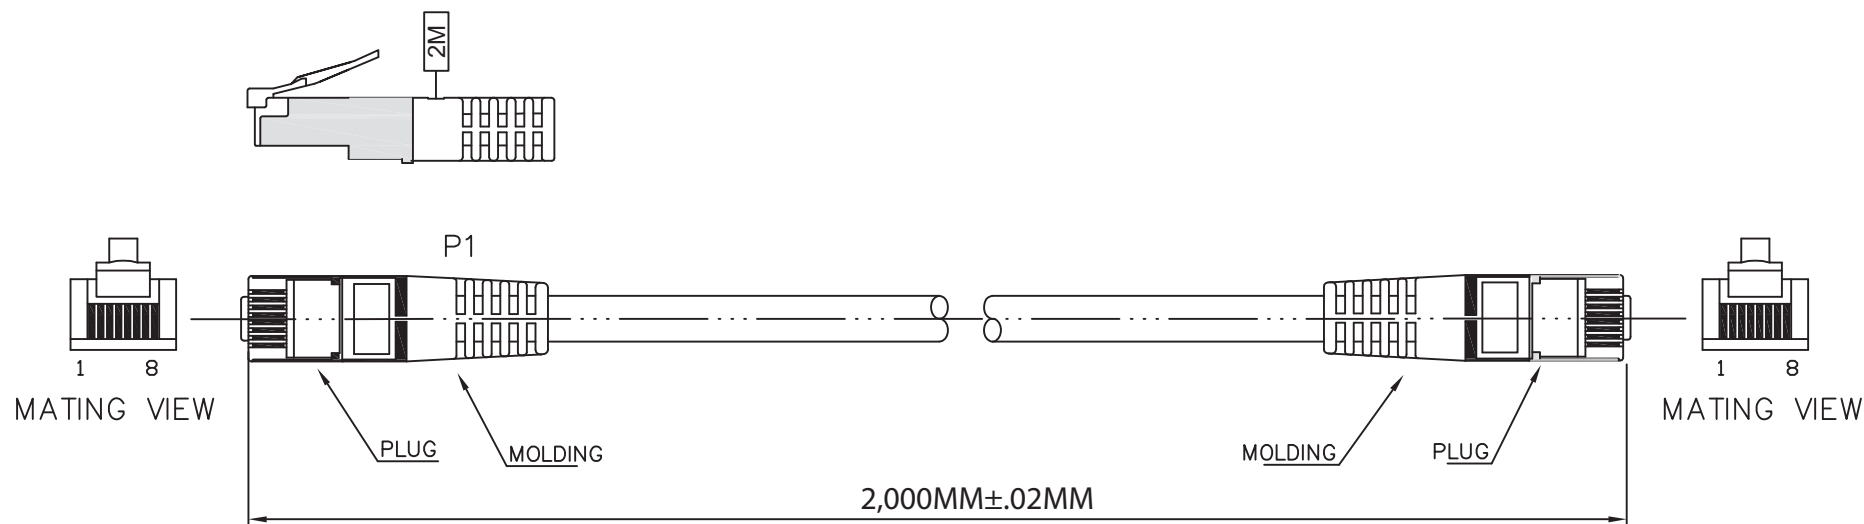


orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

Material:

- Conductor:
 - Bare Copper
 - FTP STR 26AWG*4P
- Insulator:
 - Thickness Min. at any point: 0.15MM
 - Thickness Max. Avg.: 0.25MM
 - Diameter: 0.85 ± 0.06 MM
- Jacket PVC:
 - Thickness Min. at any point: 0.50MM
 - Thickness Max. Avg.: 0.60MM
 - Diameter: 5.6 ± 0.02 MM

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

⊕ = Assmann logo

RoHS
Compliant

ITEM NO.

A-MCSP-80020/Y-R

TITLE

Cat.5e FTP Patch Cable - Yellow, 2 Meters,
8P8C, Twisted Pair, Foil Shielded

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved