

**Data Sheet**
telephone
 949 252 0522
**BACK**

Product Category: SMD Oscillators

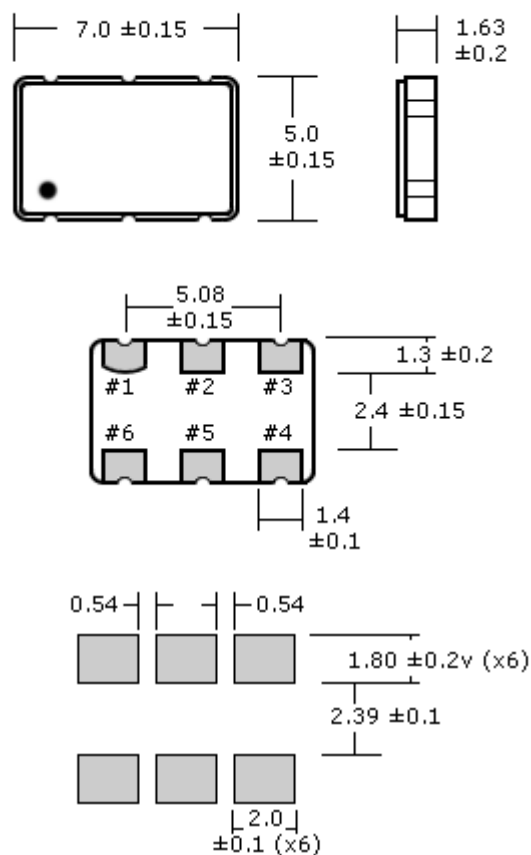
Series Number	Package	Description	Last Modified
920	5 x 7 Ceramic 6 Pad	LVDS Output	Jan. 01 2007

FEATURES

- High Frequency
- LVDS Square Wave
- Ultra-Low Jitter
- Extended Operating Temperature
- SMD Version 6 Pad
- RoHs / Lead Free compliant

**OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS**

PARAMETERS	CONDITIONS	CHARACTERISTICS	UNITS
Output Logic	-	LVDS Square Wave	-
Input Voltage (VDD)	-	3.3 ±5%	VDC
Frequency Range (f_O)	-	106.250 / 212.500	MHz
Operating Temperature (T_{OPR})	-	0 ~ +85	°C
Storage Temperature (T_{STG})	-	-55 ~ +125	°C
Overall Frequency Stability	(a) - (e)	±50 max.	PPM
	(a) Frequency Tolerance	Inclusive of Overall Stability	-
	(b) Temperature Stability	Inclusive of Overall Stability (Operating Temperature)	-
	(c) Input Voltage Stability	Inclusive of Overall Stability (VDD ±5%)	-
	(d) Load Stability	Inclusive of Overall Stability (RL ±5%)	-
	(e) Aging (@ 25°C)	±3 max.	PPM/Y
Current Consumption	-	60 max.	mA
Rise Time (T_r)	-	600 max. (20% to 80% of Waveform)	ps
Fall Time (T_f)	-	600 max. (20% to 80% of Waveform)	ps
Offset Voltage	-	1.2 ±0.1	V
Output Voltage (P-P)	-	400 ~ 800	mV
Load	-	100	Ohms
Duty Cycle	-	50 ±5	%
Start-Up Time (T_S)	-	10 max.	mS
Phase Jitter	(12KHz to 20MHz)	RMS: 1 max.	ps

PACKAGE DIMENSIONS (mm)

Suggested Solder Pad Layout

PIN CONNECTIONS	
#1	Tri-State (Enable High)
#2	Frequency Select: NC or Vcc: 106.25MHz GND: 212.50MHz
#3	Ground
#4	Output
#5	Complimentary Output
#6	VDD

MARKING	
Line 1	Oscilent
Line 2	920

PART NUMBER GUIDE

Series Number	Frequency	Voltage Supply Option	Frequency Tolerance & Stability (max.)	Oper. Temp. (°C)	Duty Cycle	Pin #1	Other
920	- AM	- 3	E	1	- T	TS	- 001
Oscilent Series	Frequency Select: NC or Vcc: 106.25MHz GND: 212.50MHz	3 = 3.3VDC	E = ±50 PPM	1 = 0~+85	T = 50±5%	Tri-State	-

NOTE: - Deviations on all parameters available. Please consult Oscilent for details.

DEFINITIONS: - Click on the characteristic names above for definitions of that particular characteristic.

***STANDARDS:** - "Blank" part number selections indicate standard variables for that particular characteristic.

PACKAGING: - Standard tube packaging, add **-TR** for Tape/Reel. Click [here](#) for tape/reel specifications

Oscilent Corporation - CALL **949.252.0522**

Series No.: **920**

18195 East McDermott Street . Building D . Irvine . CA 92614 . USA

Fax: 949.252.0599 . E-Mail: Sales@Oscilent.com