

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0905841314](#)
Status: **Active**
Description: 1.27mm (.050") Pitch Picoflex® PF-50 IDT Receptacle, Low Profile, Board-In, 14 Circuits

Documents:

[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification ES-99033-0002 \(PDF\)](#)
[Product Specification PS-99020-0011 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Ribbon Cable / Wire Trap Connectors
Series	90584
Comments	Low Profile
Component Type	One Piece
Glow-Wire Compliant	No
MolexKits	Yes
Product Name	Board-In, Picoflex®


Physical

Circuits (Loaded)	14
Color - Resin	Natural
Durability (mating cycles max)	30
Entry Angle	90° Angle
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Number of Rows	2
PCB Locator	No
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.050 In
Pitch - Mating Interface (mm)	1.27 mm
Plating min: Mating (µin)	80.00
Plating min: Mating (µm)	2.00
Plating min: Termination (µin)	80.00
Plating min: Termination (µm)	2.00
Polarized to Mating Part	N/A
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole - Kinked Pin
Wire Insulation Diameter	1.00mm (.039") max.
Wire Size AWG	26, 28
Wire/Cable Type	Ribbon Cable

Electrical

Current - Maximum per Contact	1.2A
Voltage - Maximum	250V

Solder Process Data



Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No**
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[90584Series](#)

Mates With

N/A

Application Tooling | FAQ

*Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.*

Global

Description	Product #
Arbor Press Fixture	0690201902
Semi-Automatic	0691271010
Bench Press PB16 with Auto De- tubing for 90854 Connectors	
Handtool for 90327, 90584 and 91577 Picoflex®	0690081090

Lead-free Process Capability

Wave Capable (TH only)

Connectors, 4-26
Circuit
Arbor Press Fixture 0690201908
for 91577 Picoflex®
Connectors

Material Info

Reference - Drawing Numbers

Product Specification
Sales Drawing

ES-99033-0002, PS-99020-0011
SDA-90584

This document was generated on 06/08/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

10	9	8	7	6	5	4	3	2	1
90584 -**26	26	(35.53)/1.399	(31.75)/1.250	(30.48)/1.200	14	98	7		
↑ -**24	24	(32.99)/1.299	(29.21)/1.150	(27.94)/1.100	15	105	↑		
-**22	22	(30.45)/1.199	(26.67)/1.050	(25.40)/1.000	16	112			
-**20	20	(27.91)/1.099	(24.13)/.950	(22.86)/.900	18	126			
-**18	18	(25.37)/.999	(21.59)/.850	(20.32)/.800	20	140			
-**16	16	(22.83)/.899	(19.05)/.750	(17.78)/.700	23	161			
-**14	14	(20.29)/.799	(16.51)/.650	(15.24)/.600	26	182			
-**12	12	(17.75)/.699	(13.97)/.550	(12.70)/.500	30	210			
-**10	10	(15.21)/.599	(11.43)/.450	(10.16)/.400	34	238			
-**08	8	(12.67)/.499	(8.89)/.350	(7.62)/.300	42	294			
↓ -**06	6	(10.13)/.399	(6.35)/.250	(5.08)/.200	54	378	↓		
90584 -**04	4	(7.59)/.299	(3.81)/.150	(2.54)/.100	70	490	7		
PART NO.	CCT SIZE	DIMENSION A	DIMENSION B	DIMENSION C	TUBE QTY	STACK QTY	TUBES PER STACK		

HOUSING

MATL. POLYESTER, RATED UL 94V-0, COLOUR WHITE.

IDT CONTACT

MATL : PHOSPHOR BRONZE (0.28)/.011 REF THICK.

PLATING : (2-4um) / 80-160u" TIN

NOTES:

1. APPL. CLASS TO DIN 40040 HME (-25°C/+100°C)
2. SEE PRODUCT SPECIFICATION PS-99020-0011
3. WIRE TERMINATION SPEC : ES-99033-0002

90584- * * * *

04 TO 26 = CKT SIZE.





3= NO CIRCUITS VOIDED.

4= CIRCUITS 4 & 5 VOIDED.

1= INDIVIDUAL TUBED ASSY

2= STACKED TUBED ASSY - SEE SHEET 2

9= NON STANDARD OPTION - SEE SHEET 3

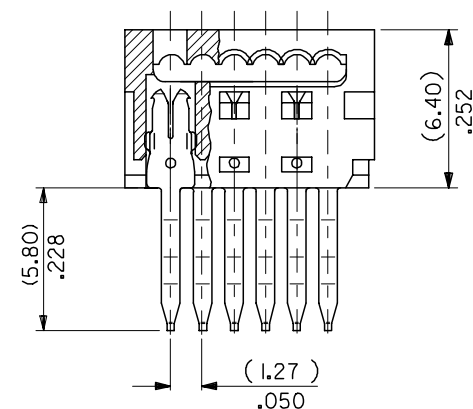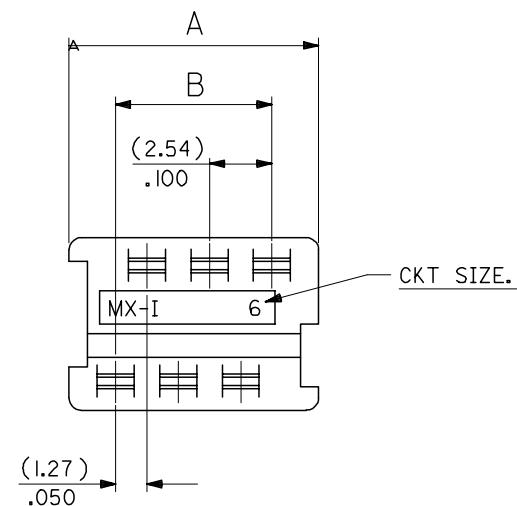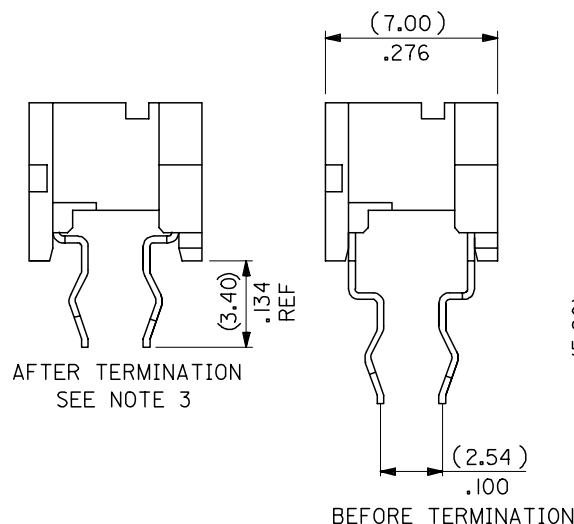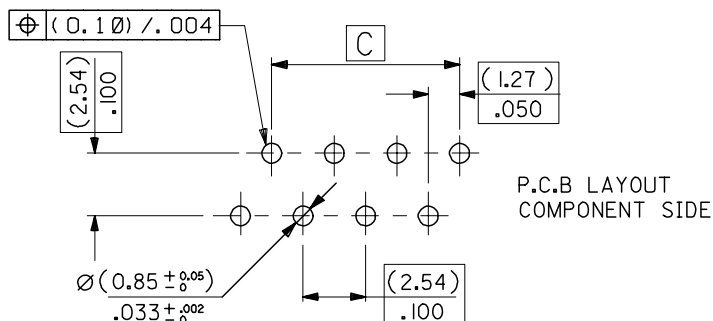

ADD VOIDED OPTION EC NO: E2005-1027 DRAWN: GMSWEN 2005/05/10 CHKD: JMR/LARTY 2005/05/10 APPR: DENNEHY 2005/05/26 M	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		mm	INCH	DRAWN BY DMCNAMAR	DATE 2003/09/01	TITLE 1.27MM PF LOW PRO IDT BOARD-IN CONNECTOR			
		4 PLACES	± ---	± ---	CHECKED BY BMAGUIRE	DATE 2003/09/01			
		3 PLACES	± ---	± ---	APPROVED BY MWILHITE	DATE 2003/09/01			
		2 PLACES	± 0.10	± ---					
		1 PLACE	± 0.20	± ---					
		ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO. SDA-90584			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART					
		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

