
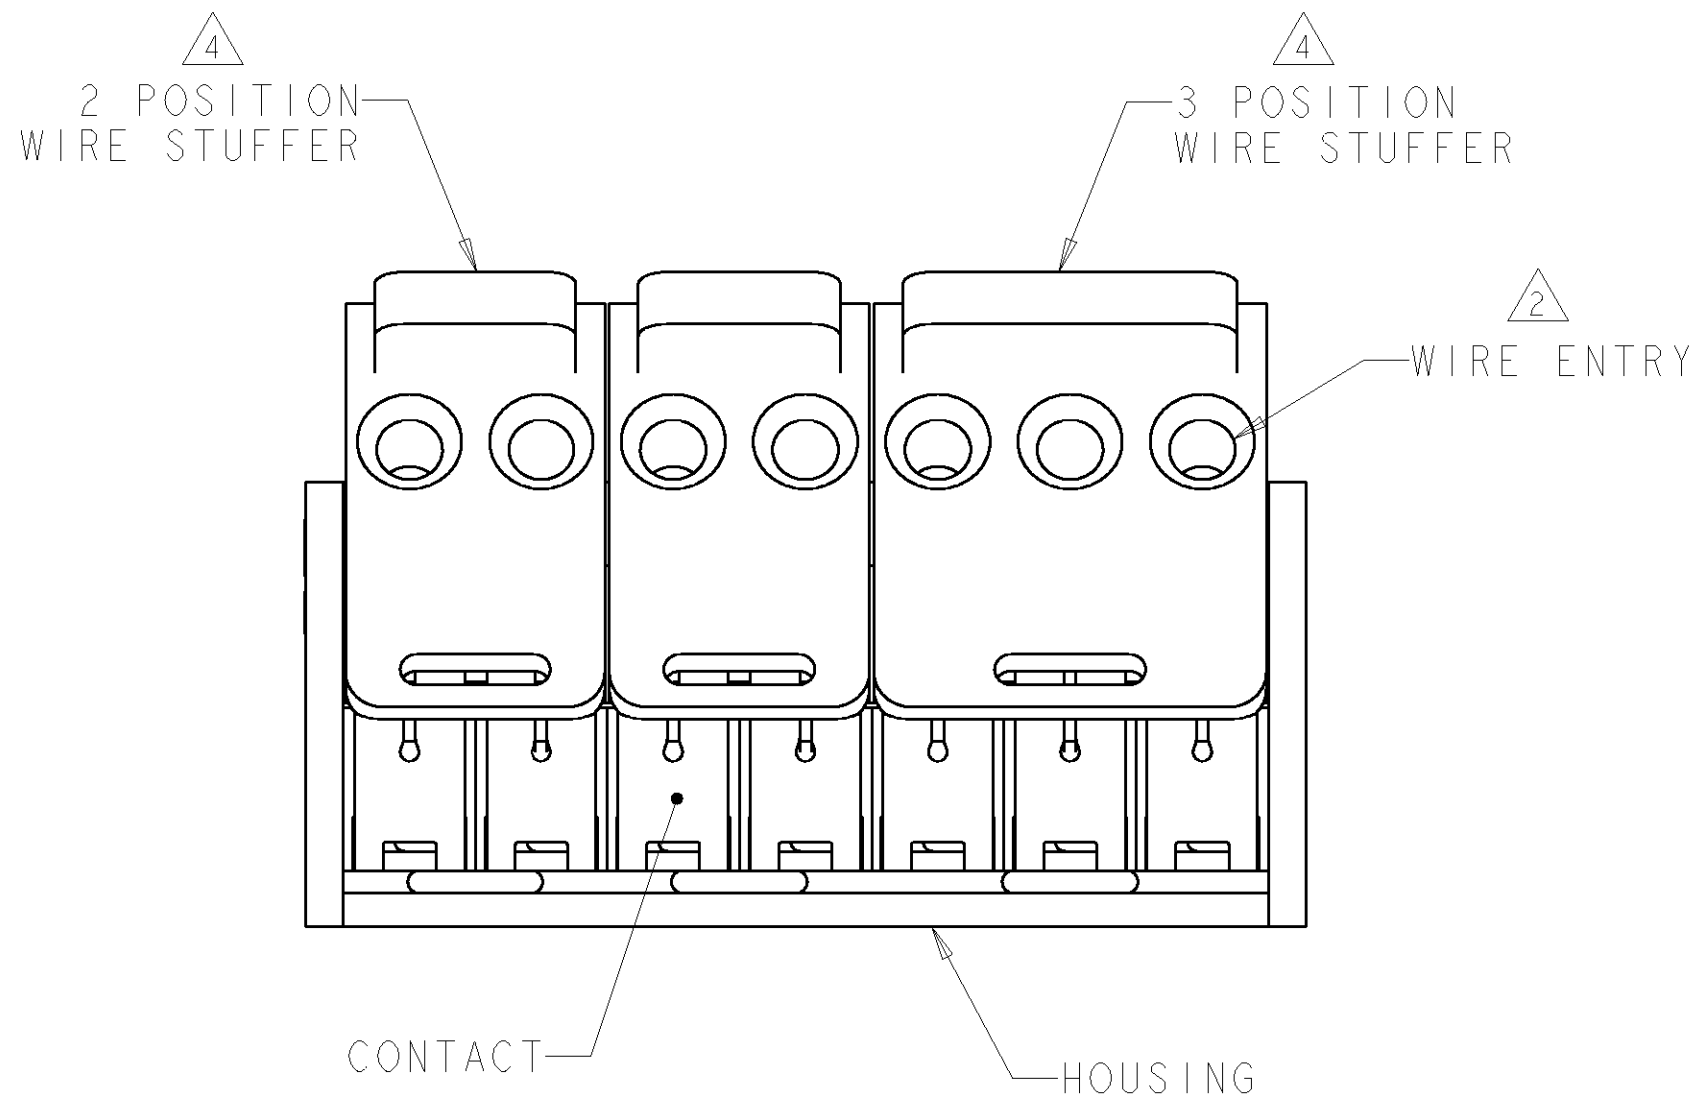
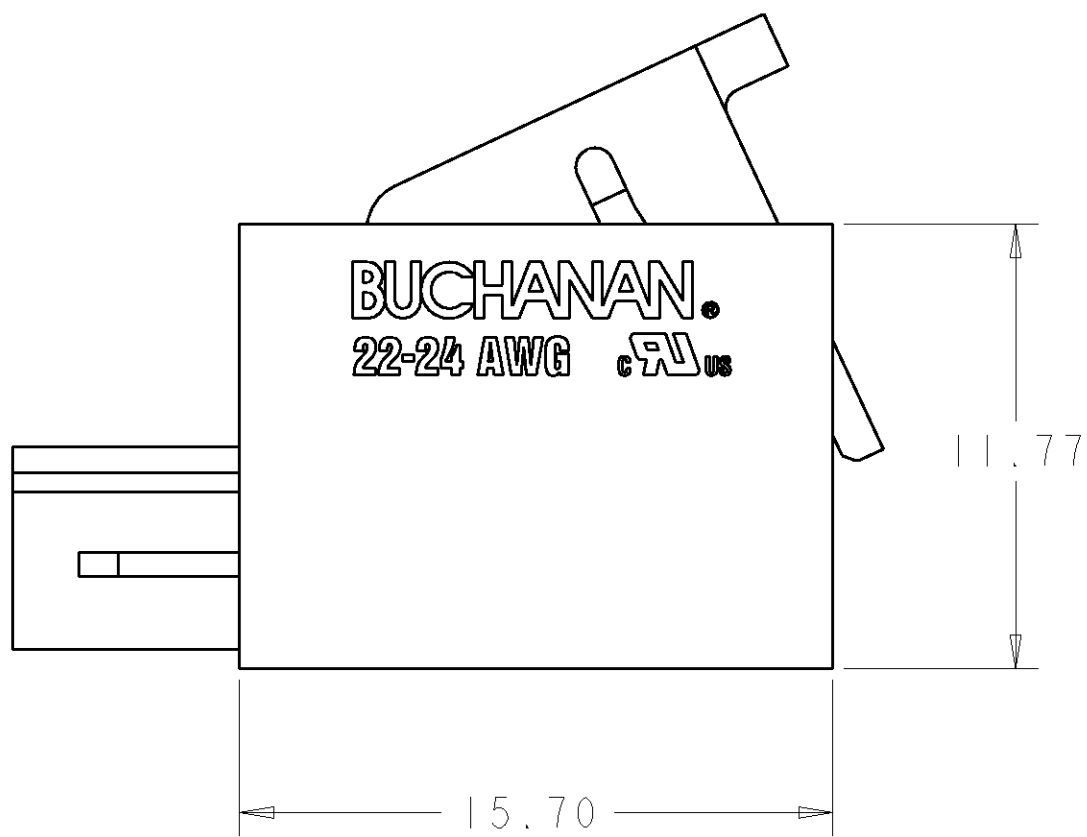
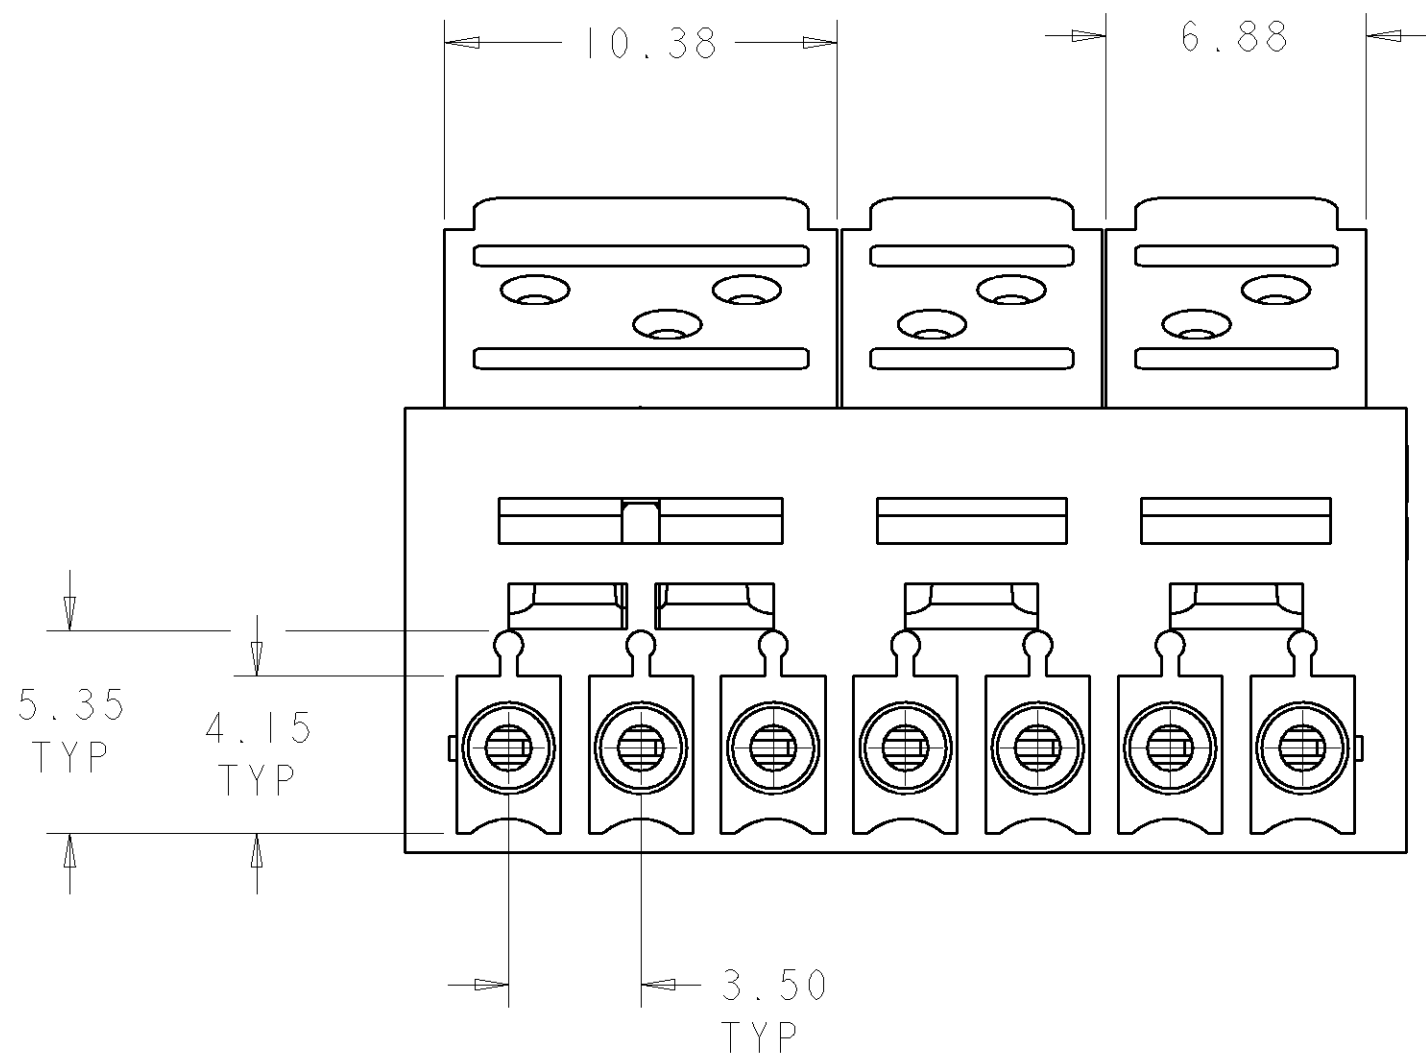
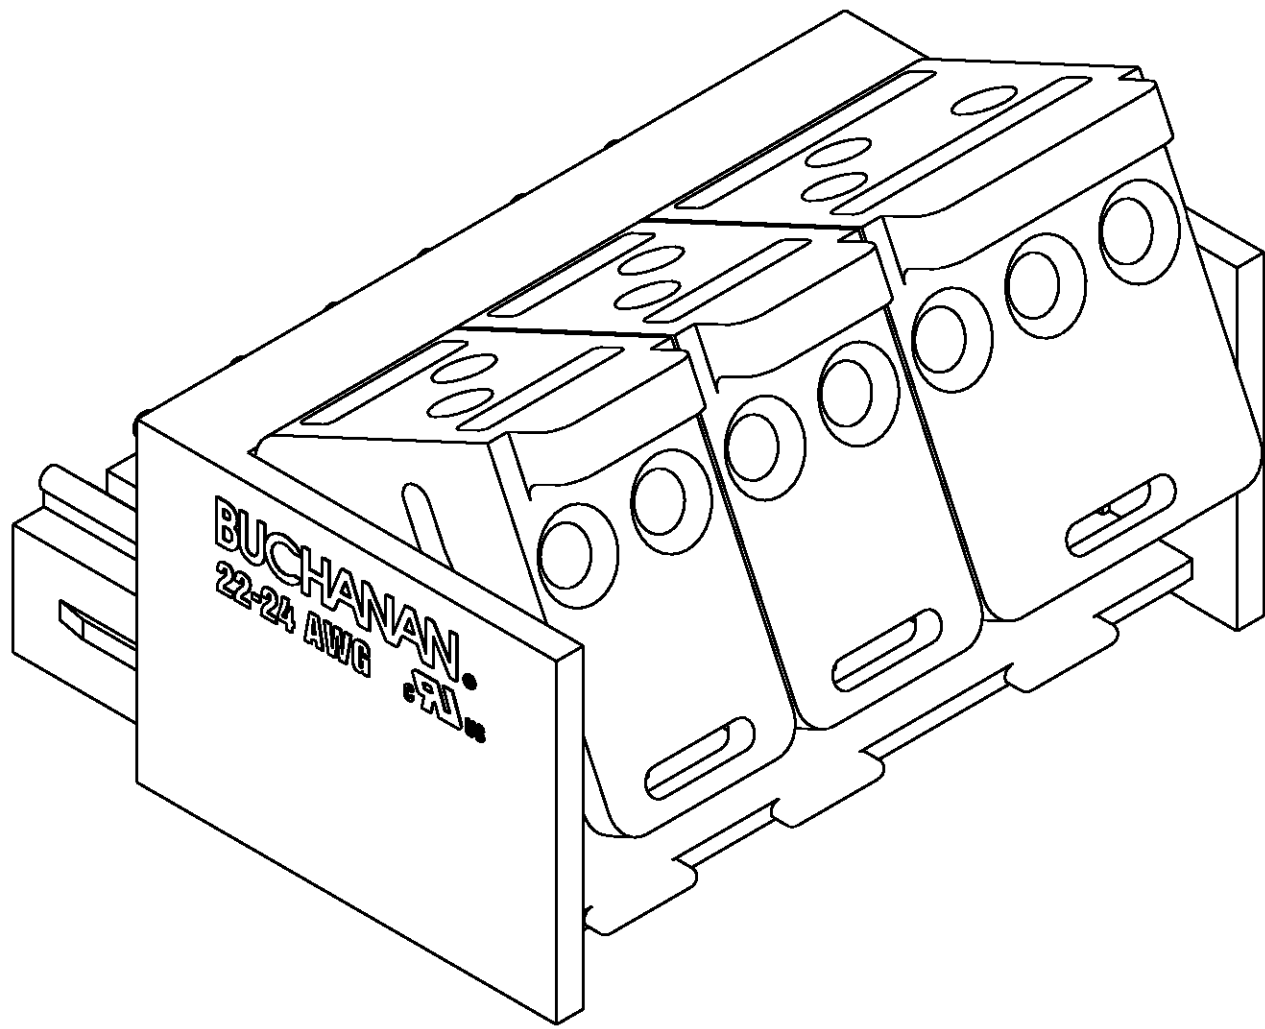


LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			0	RELEASED EC 0638-0963-04	18MAR2005	SW	CR

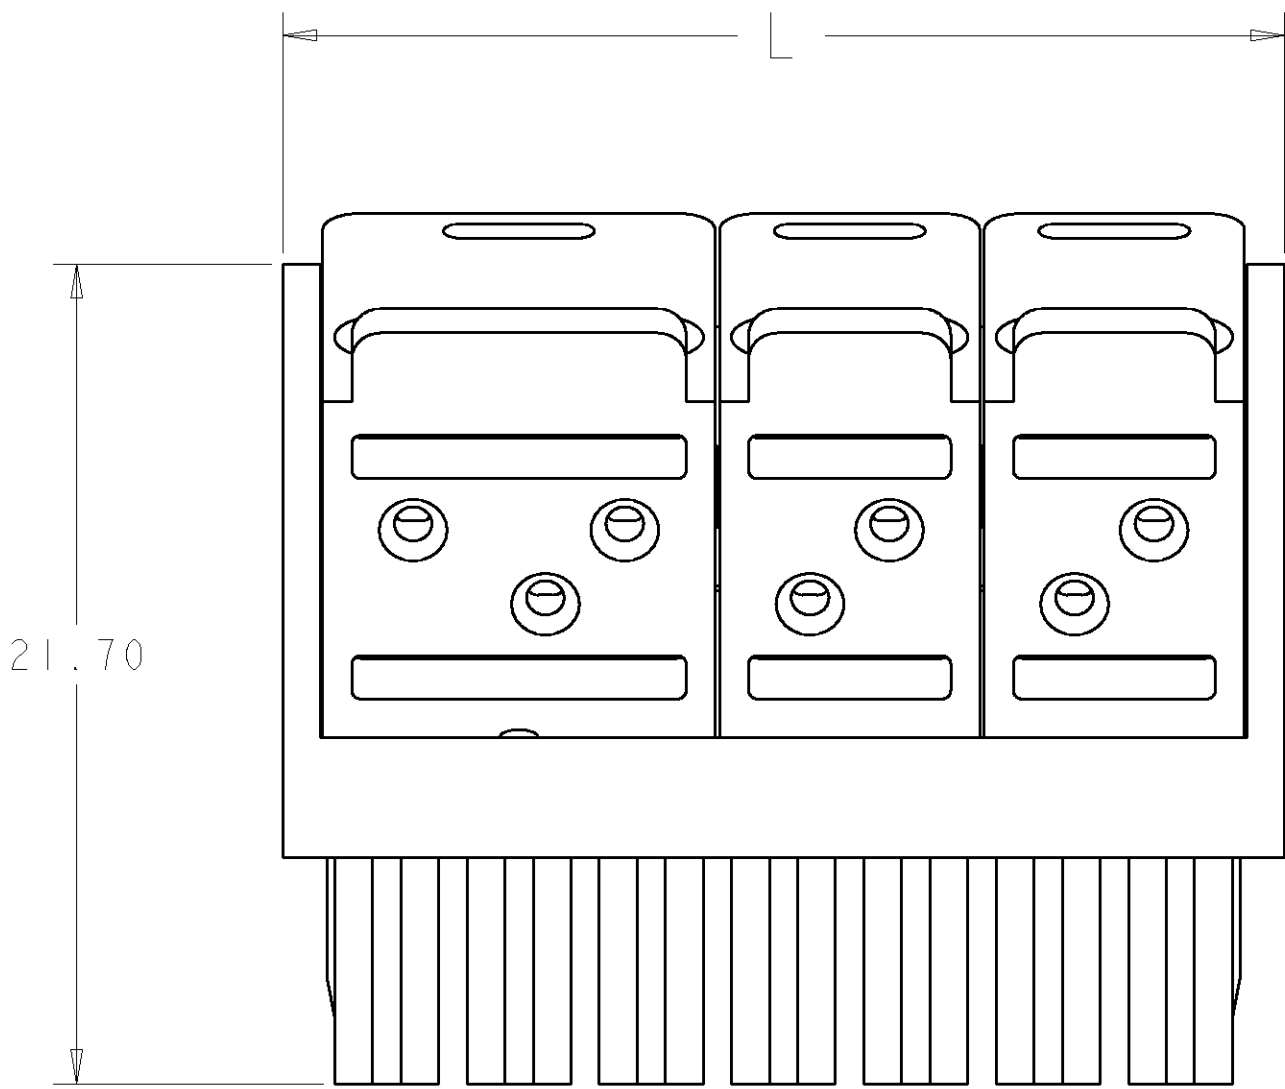

- 1 MATERIAL AND FINISH:
HOUSING: POLYESTER, COLOR: GREEN.
WIRE STUFFERS: POLYCARBONATE, COLOR: CLEAR.
CONTACT: COPPER ALLOY, 3.00µm MINIMUM TIN OVER 1.27µm NICKEL.
- 2 WIRE ENTRY ACCEPTS ONE UNSTRIPPED, STRANDED OR SOLID COPPER 22-24 AWG WIRE WITH A MAXIMUM INSULATION DIAMETER OF 1.52mm. RECOMMENDED WIRE INSULATION IS PVC. THIS CONNECTOR MAY NOT FUNCTION CORRECTLY WITH SRPVC OR ANY OTHER RIGID OR SEMI-RIGID INSULATION. CONTACT TYCO FOR ALL OTHER WIRE INSULATION APPROVAL BEFORE USE.
3. MATES WITH 3.5mm OPEN AND CLOSED-END INDUSTRY STANDARD HEADERS.
- 4 ODD POSITION ASSEMBLIES USE ONE 3 POSITION WIRE STUFFER LOCATED OVER THE LAST THREE POSITIONS AS SHOWN AND 2 POSITION WIRE STUFFERS FOR REMAINING POSITIONS.
5. ASSEMBLIES SHIPPED WITH WIRE STUFFERS IN THE OPEN POSITION.

58.00	16	1-1776282-6
54.50	15	1-1776282-5
51.00	14	1-1776282-4
47.50	13	1-1776282-3
44.00	12	1-1776282-2
40.50	11	1-1776282-1
37.00	10	1-1776282-0
33.50	9	1776282-9
30.00	8	1776282-8
26.50	7	1776282-7
23.00	6	1776282-6
19.50	5	1776282-5
16.00	4	1776282-4
12.50	3	1776282-3
9.00	2	1776282-2
L	NO OF POSN	PART NUMBER

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED. IT IS TO BE RETURNED TO TYCO ELECTRONICS CORPORATION WHEN NO LONGER REQUIRED FOR THE LATEST EDITION.		DWN S. WELDON 18MAR2005	BUCHANAN Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS:		CHK C. RICHARD 18MAR2005		
mm		APVD C. RICHARD 18MAR2005	NAME PIVOT BLOCK ASSEMBLY, 22-24 AWG, GREEN, 3.5mm	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-1981	SIZE A	
0 PLC ±.5 1 PLC ±.13 2 PLC ±.000 3 PLC ±.000 4 PLC ±.0000 ANGLES ±		APPLICATION SPEC 114-13037	CAGE CODE 00779	
MATERIAL -		WEIGHT -	DRAWING NO 1776282	
FINISH -		CUSTOMER DRAWING	RESTRICTED TO -	
		SCALE 5:1	SHEET 1 OF 1	
			REV 0	