

KR 2506 15 MHz Video Filter

General Description

KR 2506 is a 15 MHz video lowpass filter with group delay equalization. The filter is designed to be used as an antialiasing filter in HD 2x oversampling applications. Other options including sin(x)/x compensation are available. Please consult the factory.


Features

- 15 MHz passband frequency
- <0.1 dB & < 2 nsec passband ripple
- >50 dB at 59.25 MHz
- Group delay equalization
- 75 Ω Source and Load

Typical Performance


Amplitude & Group Delay

(0.1 dB/div & 2 nsec/div) 0.1 MHz to 15 MHz

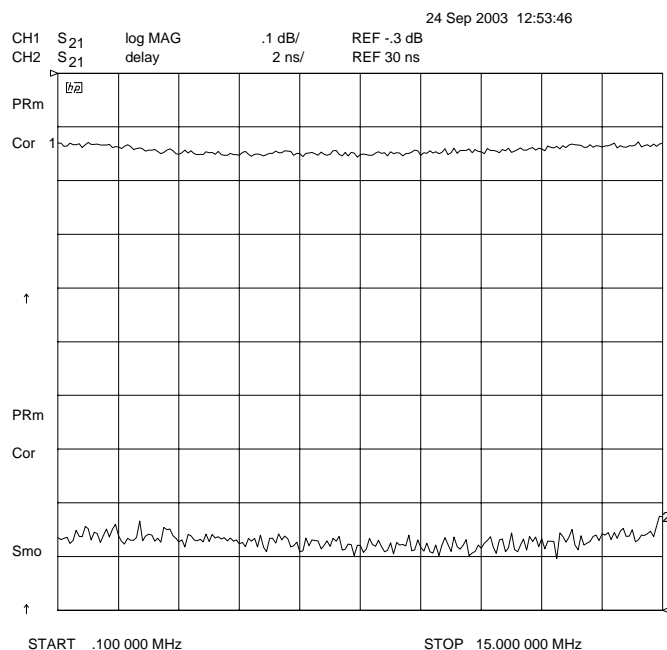

Overall Response

(5 dB/div) 1 MHz to 500 MHz

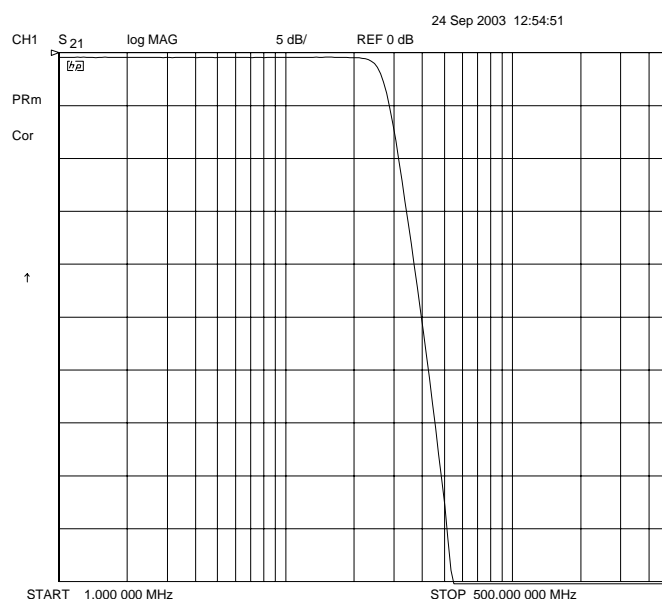

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Series 2506 Video Filter

Specifications

Parameter	Specification	Typical
Filter type	Lowpass	
End of passband	15 MHz	
Passband ripple	< 0.1 dB p-p	0.05 dB
Start of stopband -50 dB	59.25 MHz	
Group delay ripple	< 2 nsec p-p	1 nsec
Group delay control to	15 MHz	
Impedance	75 Ω	

Physical Dimensions

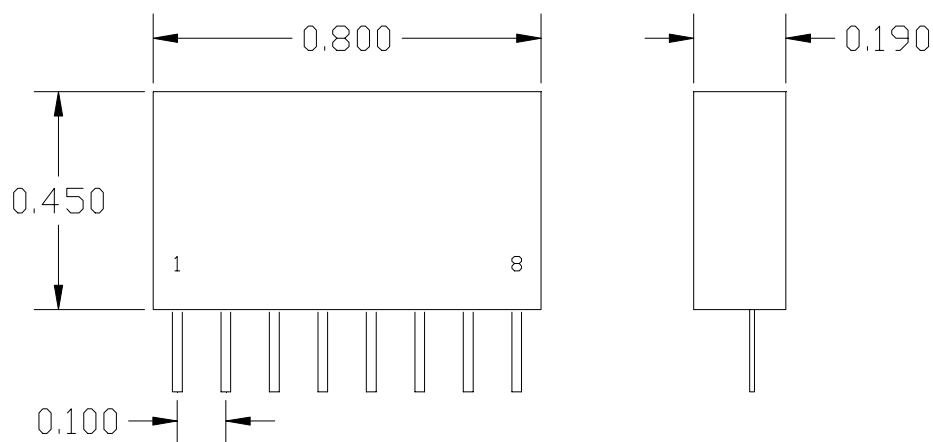

Pin 1 is Input
Pin 8 is Output
Pins 2 thru 7 are Ground

Pin dimensions .010" x .020"

Tolerance ± 0.010
All Dimensions Shown in inches

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982