



Bandpass Filter

KR Model 2335

Passband Amplitude

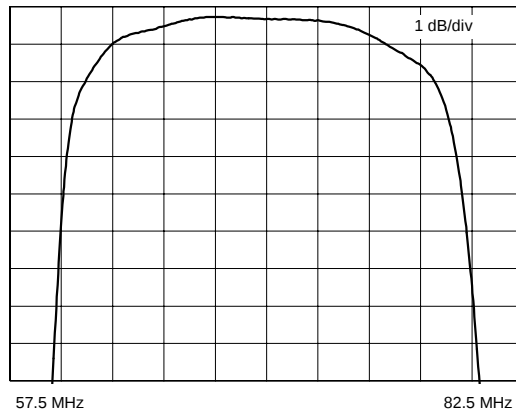


Overall Amplitude

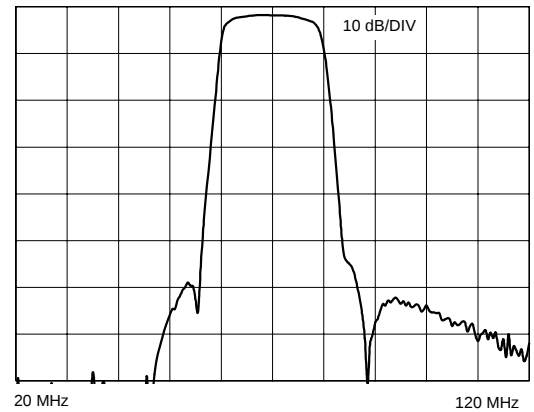

Specifications

KR Part Number	2335
Filter Type	Bandpass
Center Frequency	70 MHz
Insertion Loss	< 3 dB
40 MHz	> 50 dB
54 MHz	> 40 dB
56 MHz	> 35 dB
58 MHz	> 25 dB
66 MHz	< 0.5 dB
70 MHz	Ref
74 MHz	< 0.5 dB
82 MHz	> 25 dB
86 MHz	> 40 dB
100 MHz	> 50 dB
Source and Load Impedance	75 Ω

Outline Drawing

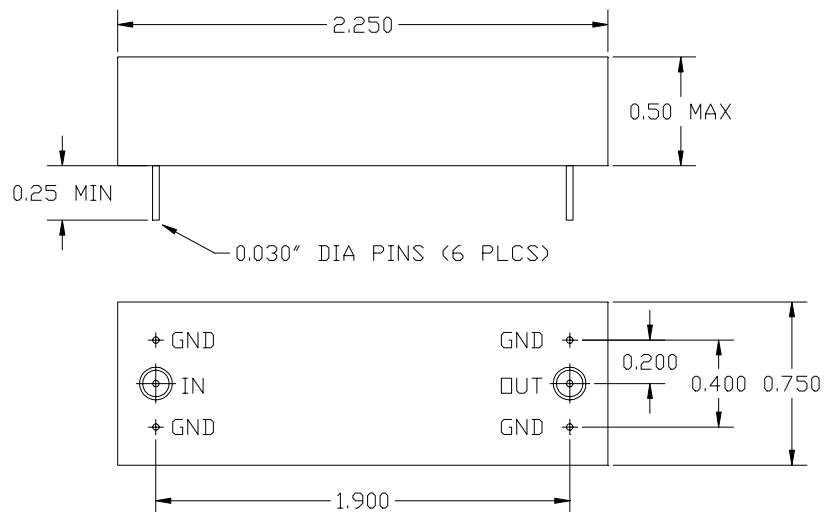

Dimensions in inches
Metal Case

KR Electronics
www.krfilters.com
 91 Avenel Street
 Avenel, NJ 07001
 732-636-1900