

KR 2491 Notch Filter

General Description


KR 2491 is a 3.75 MHz notch filter. Other frequencies can be specified.

Features

- 3.75 MHz center frequency
- 50 Ω

Typical Measured Performance

Overall Response (10 dB/div)

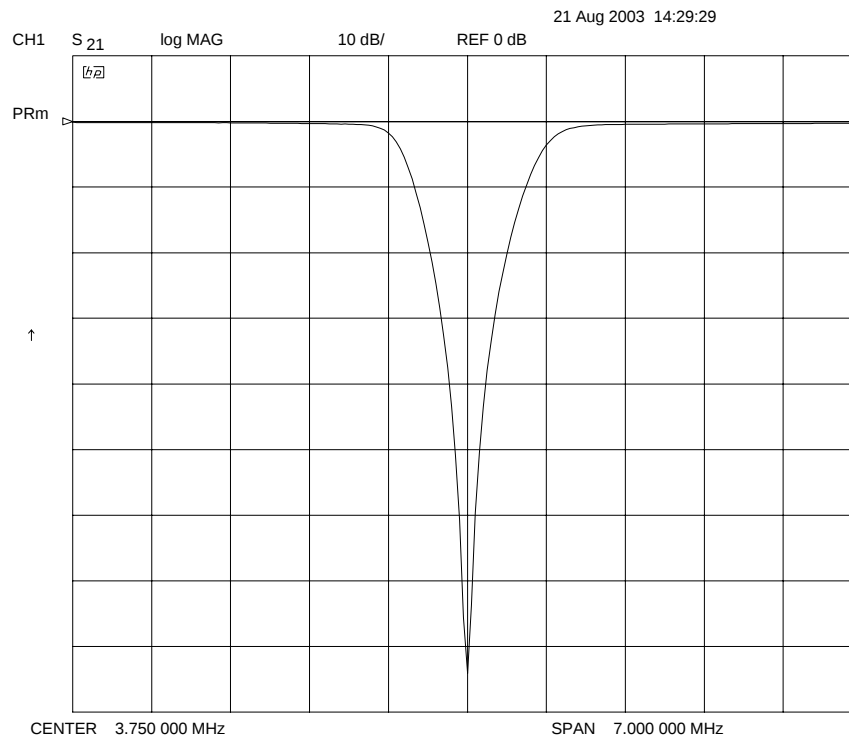

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2491 Notch Filter

Specifications

Parameter	Specification	
Filter type	Notch	
Insertion Loss	< 0.5 dB	
Notch Frequency	3.75 MHz	Consult Factory for other
Notch Depth	> 50 dB	
3 dB Bandwidth	Approx 1.25 MHz	
Source and Load	50 Ω	Consult Factory for other

Physical Dimensions

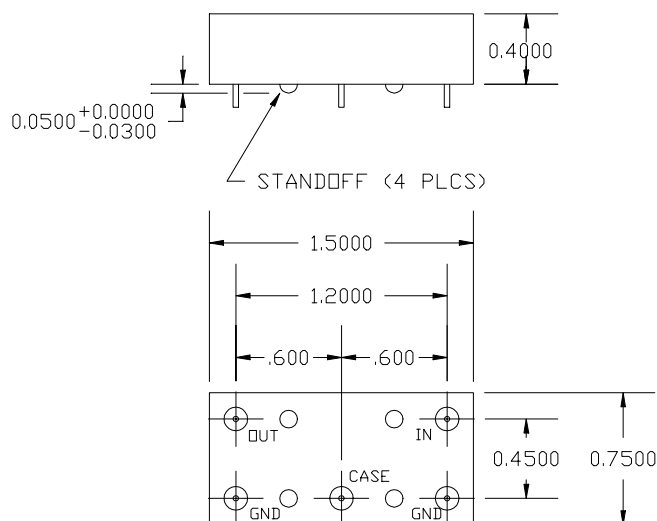

DIMENSIONS IN INCHES
METAL CASE
PIN DIAMETER 0.030" (5 PLCS)

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982