



# 贴片三端电容阵列




## 技术条件

| 型号           | 额定电压<br>VDC | 额定电流<br>A | 静电容量<br>pF | 电路数 | 插入损耗 (dB)<br>50Ω无负载系统测试 |           |            |             | 绝缘电阻<br>MΩ | 温度范围       |
|--------------|-------------|-----------|------------|-----|-------------------------|-----------|------------|-------------|------------|------------|
|              |             |           |            |     | 1<br>MHz                | 10<br>MHz | 100<br>MHz | 1000<br>MHz |            |            |
| NFA81R00C220 | 50          | 0.3       | 22         | 8   | 0                       | 0         | 0          | 14          | 1000<br>以上 | -55 ~ +125 |
| NFA81R00C470 |             | 0.3       | 47         |     | 0                       | 0         | 2          | 20          |            |            |
| NFA81R00C101 |             | 0.3       | 100        |     | 0                       | 0         | 6          | 32          |            |            |
| NFA81R00C471 |             | 0.2       | 470        |     | 0                       | 2         | 18         | 40          |            |            |
| NFA81R10C102 |             | 0.2       | 1000       |     | 0                       | 6         | 24         | 42          |            |            |
| NFA81R10C222 |             | 0.2       | 2200       |     | 0                       | 12        | 30         | 36          |            |            |
| NFA81R10C223 |             | 0.3       | 22000      |     | 10                      | 30        | 58         | 38          |            |            |
| NFA41R00C220 | 50          | 0.2       | 22         | 4   | 0                       | 0         | 0          | 14          |            | -55 ~ +85  |
| NFA41R00C470 |             | 0.2       | 47         |     | 0                       | 0         | 2          | 20          |            |            |
| NFA41R00C101 |             | 0.2       | 100        |     | 0                       | 0         | 6          | 32          |            |            |
| NFA41R00C471 |             | 0.2       | 470        |     | 0                       | 2         | 18         | 40          |            |            |
| NFA41R10C102 |             | 0.2       | 1000       |     | 0                       | 6         | 24         | 42          |            |            |
| NFA41R10C222 |             | 0.2       | 2200       |     | 0                       | 12        | 30         | 36          |            |            |
| NFA41R10C223 |             | 0.2       | 22000      |     | 10                      | 30        | 58         | 38          |            |            |
| NFA41R10C104 |             | 0.2       | 100000     |     | 25                      | 44        | 50         | 40          |            |            |




## 外形结构图

### NFA81R

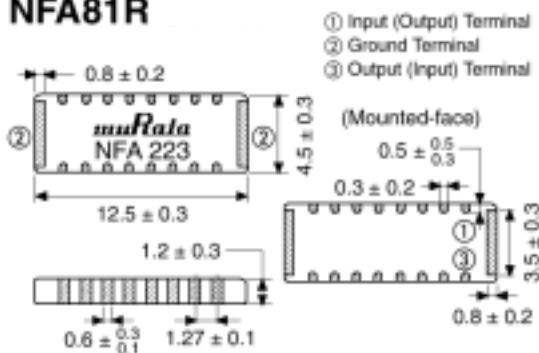

### NFA41R

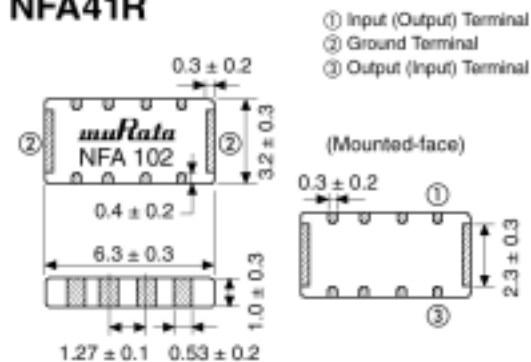

## 等效电路图

