



20

C&K CM Series Single Pole Power Rocker Switches

SWITCH FUNCTION


NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS			SCHEMATIC
								
SP	CM101	ON	NONE	ON	2-3	N/A	2-1	
	CM102	ON	NONE	OFF				 OR  For Illuminated Version
	CM103	ON	OFF	ON				
	CM107	ON	OFF	MOM.				
	CM12 *	ON	NONE	OFF				

* CM12 - for switches with both marking and illumination

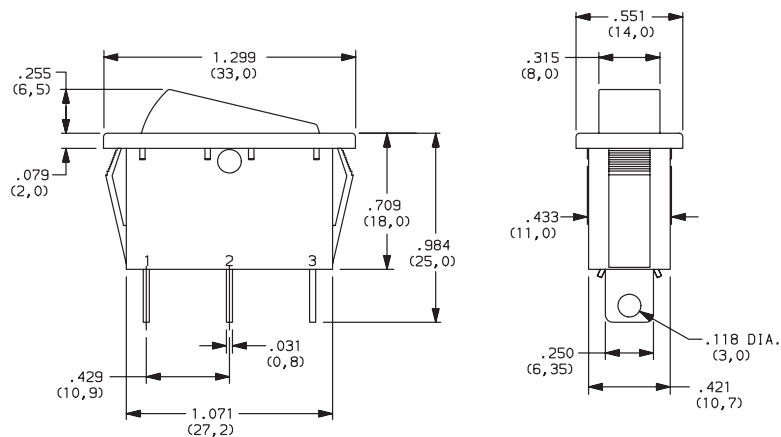


ACTUATOR

J1 ROCKER
J3 ILLUMINATED ROCKER

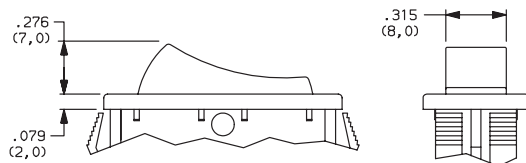

NOTE: J3 actuator available with CM102 switch function only.

J6 ROCKER
J8 ILLUMINATED ROCKER

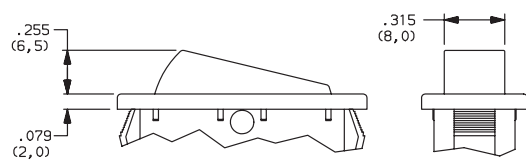

NOTE: J8 actuator available with CM102 switch function only.

C&K CM Series

Single Pole Power Rocker Switches


ACTUATOR COLOR

OPTION CODE	ACTUATOR COLOR
2	(STD.) BLACK
1	WHITE
3	RED
R	RED, ILLUMINATED
A	AMBER, ILLUMINATED
G	GREEN, ILLUMINATED

MOUNTING STYLE/COLOR



S2 (STD.) SNAP-IN, BLACK

S1 SNAP-IN, WHITE

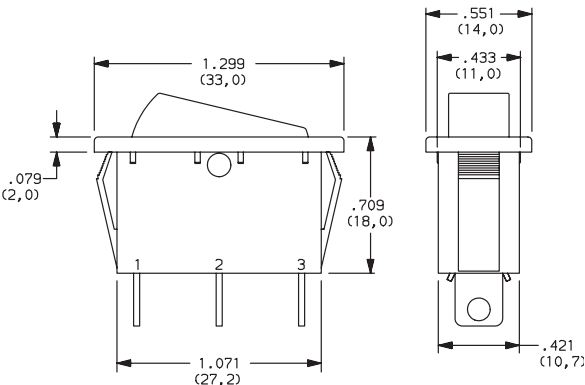

S4 (STD.) SNAP-IN, BLACK (SHORT FRAME)


S3 SNAP-IN, WHITE

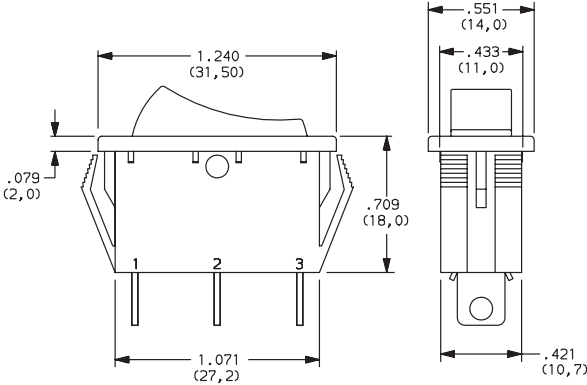


PANEL THICKNESS	"X"	"Y"
0.030-0.049 (0,75-1,25)	1.189-.004 (30,2-0,1)	0.441+.004 (11,2+0,1)
0.049-0.079 (1,25-2,0)	1.197-.004 (30,4-0,1)	0.441+.004 (11,2+0,1)
0.079-0.118 (2,0-3,0)	1.212-.004 (30,8-0,1)	0.441+.004 (11,2+0,1)

TERMINATION

05 (STD.) .250" QUICK CONNECT

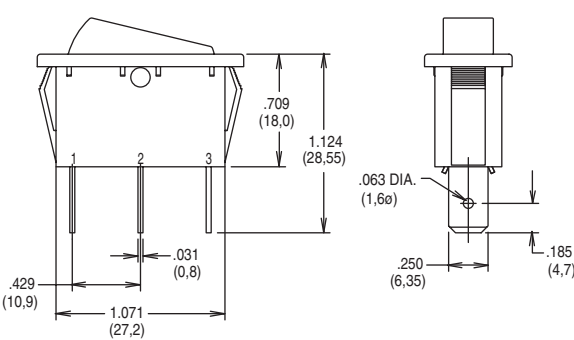

07 SOLDER LUG

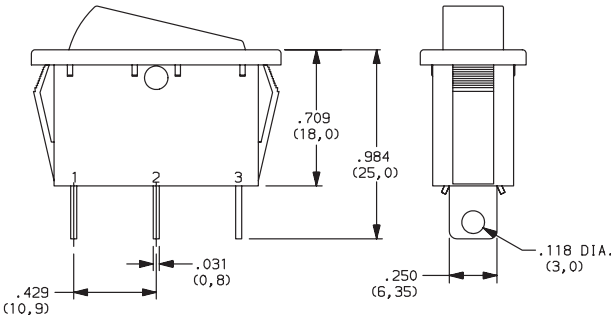

NOTE: Available with CM101 & CM102 switch functions only.

C&K CM Series

Single Pole Power Rocker Switches

ACTUATOR MARKING


NONE (STD.) NO MARKING

D ON-OFF



H OI

P O -



NOTE: Orientation of actuator marking and terminals.

CONTACT MATERIAL

OPTION CODE	CONTACT AND TERMINAL MATERIAL	RATINGS	
QA (STD.)	SILVER	POWER	16 AMPS @ 125 VAC; 1/8 HP 10 AMPS @ 250 VAC, 1/3 HP (UL/CSA).

LAMP RATING

(NONE) NO LAMP

7 125 VAC 33k Ω NEON

8 250 VAC 150k Ω NEON

NOTE: Lamp rating for J3 & J8 actuator option.