

Filter THT

Features:

- 10.7 MHz
- Series LT or LT A10
- Consumer electronics
- Individual specification: A5, S2, S3 or J

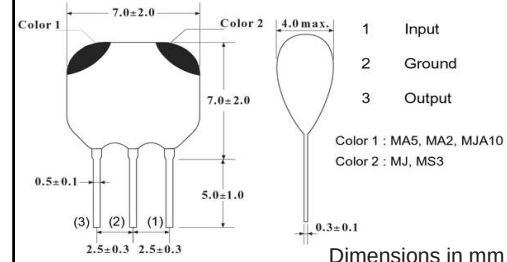





LT

LT/A10

Specifications				
Part	LT			
	A5-	S2-	S3-	J-
3db band width (kHz)	280 +/-50	230 +/-50	180 +/-40	150 +/-40
20db band width (kHz) max	650	600	520	430
Insertion loss (dB) max	6	6	7	10
Spurious attenuation (9 ~ 12MHz) (dB) min	30	40	40	38
Input/output impedance (Ohm)	330	330	330	330

Specifications				
Part	LT/A10			
	A10-A5	A10-S2	A10-S3	A10-J
3db band width (kHz)	280 +/-50	230 +/-50	180 +/-40	150 +/-40
20db band width (kHz) max	590	520	470	360
Insertion loss (dB) max	2.5 +/-2.0	3.0 +/-2.0	3.5 +/-1.5	4.5 +/-2.0
Spurious attenuation (9 ~ 12MHz) (dB) min	30	35	35	35
Input/output impedance (Ohm)	330	330	330	330

Drawing	Characteristics		
 Dimensions in mm	 LT10.7MA5 Frequency Characteristics	 LT10.7MS2 Frequency Characteristics	 LT10.7MS3 Frequency Characteristics

Test circuit	Color code																		
$R_g+R_1=R_2=$ Input / Output Impedance $C = 10\text{pF}$ (Including Stray capacitance and input Capacitance of RF voltmeter)	<table><tr><th>Center Frequency</th><th>Code</th><th>Color</th></tr><tr><td>10.700MHz±30KHz</td><td>A</td><td>Red</td></tr><tr><td>10.670MHz±30KHz</td><td>B</td><td>Blue</td></tr><tr><td>10.730MHz±30KHz</td><td>C</td><td>Orange</td></tr><tr><td>10.640MHz±30KHz</td><td>D</td><td>Black</td></tr><tr><td>10.760MHz±30KHz</td><td>E</td><td>White</td></tr></table>	Center Frequency	Code	Color	10.700MHz±30KHz	A	Red	10.670MHz±30KHz	B	Blue	10.730MHz±30KHz	C	Orange	10.640MHz±30KHz	D	Black	10.760MHz±30KHz	E	White
Center Frequency	Code	Color																	
10.700MHz±30KHz	A	Red																	
10.670MHz±30KHz	B	Blue																	
10.730MHz±30KHz	C	Orange																	
10.640MHz±30KHz	D	Black																	
10.760MHz±30KHz	E	White																	

Order key				
F	- LT	- A5	- 10.700 M	-
Part	Package	Individual specification	Center frequency M = MHz. K = KHz	Opion
F= Ceramic filter	LT LT/A10	A5 S2 S3 J	10.700 MHz (= A = Red) 10.670 MHz (= B = Blue) 10.730 MHz (= C = Orange) 10.640 MHz (= D = Black) 10.760 MHz (= E = White) 450 ~ XXX ~ 470 KHz	blanc = standard X=Special options

Remarks: All specifications subject to change without notice!