


## Super LLD II (For PFC circuit) (current discontinuous mode)

### LOW LOSS SUPER HIGH SPEED RECTIFIER

#### ■ Outline drawings, mm

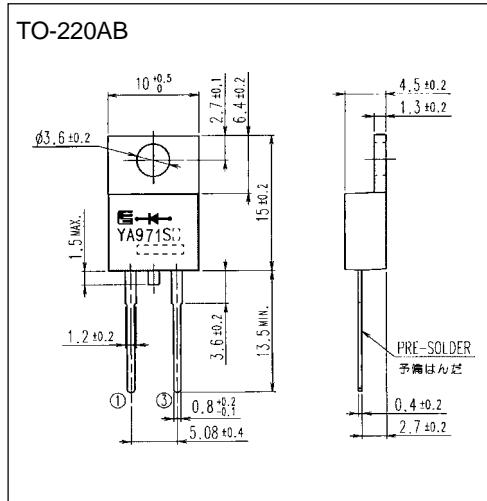

#### ■ Features

- Super high speed switching
- High reliability by planer design

#### ■ Applications

- PFC circuit (current continuous mode)

#### ■ Connection diagram



#### ■ Maximum ratings and characteristics

##### ● Maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V <sub>RRM</sub>		600	V
Average output current	I <sub>o</sub>	Square wave duty=1/2, T <sub>c</sub> =116°C	8	A
Non-Repetitive surge current	I <sub>FSM</sub>	Sine wave10ms,1shot	70	A
Operating junction temperature	T <sub>j</sub>		150	°C
Storage temperature	T <sub>stg</sub>		-40 to +150	°C

##### ● Electrical characteristics (Ta=25°C Unless otherwise specified )

Item	Symbol	Conditions	Characteristics	Unit
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =8A	Max 1.55	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> =V <sub>RRM</sub>	Max. 10.0	μA
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =0.1A, I <sub>R</sub> =0.2A, I <sub>rec</sub> =0.05A	Max. 50.0	ns
Thermal resistance	R <sub>th(j-c)</sub>	Junction to case	Max. 2.5	°C/W

##### ● Mechanical characteristics

Mounting torque	Recommended torque	0.3 to 0.5	N·m
Approximate mass		2.0	g

## ■ Characteristics

