

Technical Data Sheet Infrared Remote-control Receiver Module

IRM-3638



Features :

- · High protection ability against EMI.
- Circular lens to improve the receive characteristic.
- · Line-up for various center carrier frequencies.
- · Low voltage and low power consumption.
- · High immunity against ambient light.
- · Photodiode with integrated circuit.
- TTL and CMOS compatibility.
- · Long reception distance and high sensitivity
- Automatic sensitivity adaptation(AGC) and automatic strong signal adaptation(ATC).

Description:

 The device is a miniature type infrared remote control system receiver which has been developed and designed by utilizing the most updated IC technology. The PIN diode and preamplifier are assembled on lead frame, the epoxy package is designed as an IR filter. The demodulated output signal can directly be decoded by a microprocessor.


Applications :

- 1. Optical switch
- 2. Light detecting portion of remote control
- · AV instruments such as Audio, TV, VCR, CD, MD, etc.
- Home appliances such as Air-conditioner, Fan , etc.
- The other equipments with wireless remote control.
- CATV set top boxes
- · Multi-media Equipment


PART	MATERIAL	COLOR		
Chip	Silicon	Black		




Package Dimensions :



- ① OUTPUT
- ② GND
- 3 Vcc





NOTES:

- 1. All dimensions are in millimeters.
- 2. In case of designation is tolerance \pm 0.3mm.

Absolute Maximum Ratings at TA = 25° C

Parameter	Symbol	Rating	Unit	Notice
Supply Voltage	Vcc	0~6	V	
Operating Temperature	Topr	-25 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +85	$^{\circ}\! \mathbb{C}$	
Soldering Temperature	Tsol	260	$^{\circ}\!\mathbb{C}$	4mm from mold body less than 5 seconds



Electronic Optical Characteristics :

TA = 25°℃

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Supply Voltage	Vcc	2.5		5.5	V	DC voltage
Supply Current	Icc			3	mA	No signal input
B.P.F Center Frequency	Fo		38		KHz	
Peak Wavelength	λр		940		nm	
Reception Distance	Lo	14				
	L45	7			m	
Half Angle(Horizontal)	Θ_{h}		45		deg	At the ray axis *1
Half Angle(Vertical)	θν		45		deg	
High Level Pulse Width	T _H	400		800	μs	At the ray axis
Low Level Pulse Width	TL	400		800	μs	

Appendix of Page 3:

^{*1:}The ray receiving surface at a vertex and relation to the ray axis in the range of θ = 0° and θ =45°.

^{*2:}A range from 30cm to the arrival distance. Average value of 50 pulses.





■ Test Method :

The specified electro-optical characteristics is satisfied under the following Conditions at the controllable distance.

- ①Measurement place
 - A place that is nothing of extreme light reflected in the room.
- ②External light

Project the light of ordinary white fluorescent lamps which are not high Frequency lamps and must be less then 10 Lux at the module surface. (Ee \leq 10Lux)

3Standard transmitter


A transmitter whose output is so adjusted as to **Vo=400mVp-p** and the output Wave form shown in Fig.-1.According to the measurement method shown in Fig.-2 the standard transmitter is specified.

However , the infrared photodiode to be used for the transmitter should be $\lambda p=940$ nm, $\Delta \lambda=50$ nm. Also, photodiode is used of PD438B(Vr=5V). (Standard light / Light source temperature 2856°K).

Measuring system

According to the measuring system shown in Fig.-3


Block Diagram :

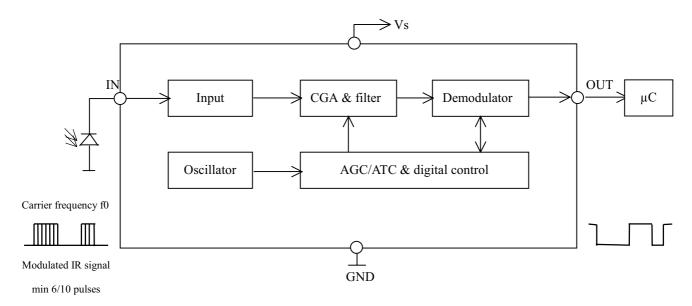



■ Application Circuit :

IRM-3638

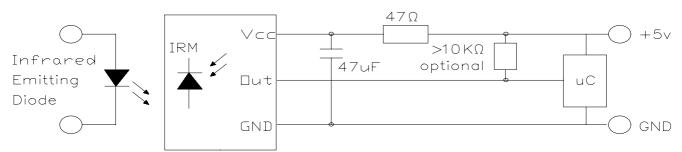

RC Filter should be connected closely between Vcc pin and GND pin.

Fig.-1 Transmitter Wave Form

D.U.T output Pulse


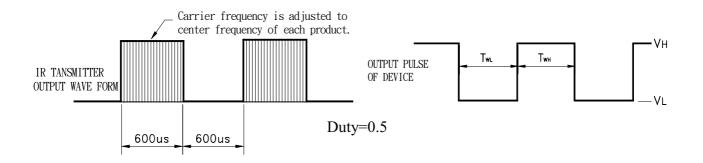


Fig.-2 Measuring Method

Fig.-3 Measuring System

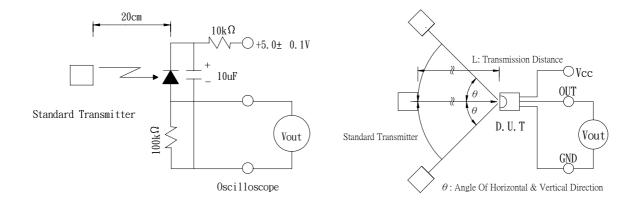

TYPICAL ELECTRICAL/OPTICAL/CHARACTERISTICS CURVES

Fig.-4 Relative Spectral Sensitivity vs. Wavelength Fig.-5 Relative Transmission Distance vs. Direction




Fig.-6 Output Pulse Length vs. Arrival Distance





Fig.-8 Relative Transmission Distance vs. Center Carrier Frequency



100 \odot 90 Distance 80 70 60 50




Fig.-7 Arrival Distance vs. Supply Voltage





Fig.-9 Arrival Distance vs. Ambient Temperature





Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

Test Items	Test Conditions	Failure Judgement Criteria	Samples(n) Defective(c)
Temperature cycle	1 cycle -25°C +25°C +75°C (30min)(5min)(30min) 300 cycle test		n=22,c=0
High temperature test	Temp: +75°C Vcc:6V 1000hrs	L ₀ ≤ Lx 0.8	n=22,c=0
Low temperature storage	Temp: -40°C 1000hrs	$L_{45} \le L_X 0.8$ L: Lower	n=22,c=0
High temperature High humidity	Ta: 60℃,RH:90% Vcc:6V 1000hrs	specification limit	n=22,c=0
Solder heat	Temp: 260± 5°C 10sec 4mm From the bottom of the package.		n=22,c=0

EVERLIGHT ELECTRONICS CO., LTD.Tel: 886-2-2267-2000, 2267-9936

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Fax: 886-2267-6244, 2267-6189, 2267-6306