

March 1999 Revised January 2001

### NC7WZ07

## TinyLogic™ UHS Dual Buffer (Open Drain Outputs)

### **General Description**

The NC7WZ07 is a dual buffer with open drain outputs from Fairchild's Ultra High Speed Series of TinyLogicTM in the space saving SC70 6-lead package. The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive while maintaining low static power dissipation over a very broad  $\rm V_{CC}$  operating range. The device is specified to operate over the 1.65V to 5.5V  $\rm V_{CC}$  range. The inputs and outputs are high impedance when  $\rm V_{CC}$  is 0V. Inputs tolerate voltages up to 7V independent of  $\rm V_{CC}$  operating voltage.


### **Features**

- Space saving SC70 6-lead package
- Ultra High Speed: t<sub>PZL</sub> 2.3 ns Typ into 50 pF at 5V V<sub>CC</sub>
- High I<sub>OL</sub> Output Drive: +24 mA at 3V V<sub>CC</sub>
- Broad V<sub>CC</sub> Operating Range: 1.65V to 5.5V
- $\blacksquare$  Matches the performance of LCX when operated at 3.3V  $\rm V_{CC}$
- Power down high impedance inputs/outputs
- Overvoltage tolerant inputs facilitate 5V to 3V translation
- Patented noise/EMI reduction circuitry implemented

### **Ordering Code:**

Order Number	Package Number	Product Code Top Mark	Package Description	Supplied As
NC7WZ07P6	MAA06A	Z07	6-Lead SC70, EIAJ SC88, 1.25mm Wide	250 Units on Tape and Reel
NC7WZ07P6X	MAA06A	Z07	6-Lead SC70, EIAJ SC88, 1.25mm Wide	3k Units on Tape and Reel

### **Logic Symbol**



### **Pin Descriptions**

Pin Names	Description
A <sub>1</sub> , A <sub>2</sub>	Data Inputs
Y <sub>1</sub> , Y <sub>2</sub>	Output


### **Function Table**

 $\mathbf{Y} = \mathbf{A}$ 


Input	Output
Α	Y
L	L
Н	Z

H = HIGH Logic Level L = LOW Logic Level

### **Connection Diagrams**



### Pin One Orientation Diagram



Pin One

AAA represents Product Code Top Mark - see ordering code

Note: Orientation of Top Mark determines Pin One location. Read the top
product code mark left to right, Pin One is the lower left pin (see diagram).

TinyLogic™ is a trademark of Fairchild Semiconductor Corporation.

### **Absolute Maximum Ratings**(Note 1)

#### 

DC Input Diode Current ( $I_{IK}$ )

@ V<sub>IN</sub> < -0.5V

DC Output Diode Current (I<sub>OK</sub>)

Junction Temperature under Bias (T<sub>J</sub>)

Junction Lead Temperature (T<sub>L</sub>)

(Soldering, 10 seconds) 260°C

Power Dissipation (P $_{\rm D}$ ) @ +85°C 180 mW

# Recommended Operating Conditions (Note 2)

 $\begin{array}{ll} \mbox{Supply Voltage Operating ($V_{\rm CC}$)} & 1.65\mbox{V to } 5.5\mbox{V} \\ \mbox{Supply Voltage Data Retention ($V_{\rm CC}$)} & 1.5\mbox{V to } 5.5\mbox{V} \\ \mbox{Input Voltage ($V_{\rm IN}$)} & 0\mbox{V to } 5.5\mbox{V} \\ \end{array}$ 

Output Voltage ( $V_{OUT}$ ) 0V to 5.5V Operating Temperature ( $T_A$ )  $-40^{\circ}$ C to +85°C

Input Rise and Fall Time  $(t_r, t_f)$ 

$$\begin{split} &V_{CC} = 1.8 \text{V, } 2.5 \text{V} \pm 0.2 \text{V} & 0 \text{ ns/V to } 20 \text{ ns/V} \\ &V_{CC} = 3.3 \text{V} \pm 0.3 \text{V} & 0 \text{ ns/V to } 10 \text{ ns/V} \\ &V_{CC} = 5.0 \text{V} \pm 0.5 \text{V} & 0 \text{ ns/V to } 5 \text{ ns/V} \end{split}$$

Thermal Resistance ( $\theta_{JA}$ ) 350° C/W

Note 1: Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation outside datasheet specifications.

Note 2: Unused inputs must be held HIGH or LOW. They may not float.

### **DC Electrical Characteristics**

Symbol	Parameter	V <sub>CC</sub>		T <sub>A</sub> = +25°C		$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Units	Conditions	
Зуппон	Farameter	(V)	Min	Тур	Max	Min	Max	Ullits	Conditions	
V <sub>IH</sub>	HIGH Level Input Voltage	1.65 to 1.95	0.75 V <sub>CC</sub>			0.75 V <sub>CC</sub>		V		
		2.3 to 5.5	0.7 V <sub>CC</sub>			0.7 V <sub>CC</sub>		l v		
V <sub>IL</sub>	LOW Level Input Voltage	1.65 to 1.95			0.25 V <sub>CC</sub>		0.25 V <sub>CC</sub>	V		
		2.3 to 5.5			$0.3  V_{\rm CC}$		$0.3\mathrm{V}_{\mathrm{CC}}$	· ·		
I <sub>LKG</sub>	HIGH Level Output	1.65 to 5.5			±5		±10	цΑ	$V_{IN} = V_{IH}$	
	Leakage Current	1.00 to 0.0			±5		±10	μΛ	$V_{OUT} = V_{C}$	<sub>CC</sub> or GND
V <sub>OL</sub>	LOW Level Output Voltage	1.65		0.0	0.1		0.0			
		1.8		0.0	0.1		0.1			
		2.3		0.0	0.1		0.1	V	$V_{IN} = V_{IL}$	$I_{OL}=100\;\mu A$
		3.0		0.0	0.1		0.1			
		4.5		0.0	0.1		0.1			
		1.65		0.08	0.24		0.24			$I_{OL} = 4 \text{ mA}$
		2.3		0.10	0.3		0.3			$I_{OL} = 8 \text{ mA}$
		3.0		0.16	0.4		0.4	V		$I_{OL} = 16 \text{ mA}$
		3.0		0.24	0.55		0.55			$I_{OL} = 24 \text{ mA}$
		4.5		0.25	0.55		0.55			$I_{OL} = 32 \text{ mA}$
I <sub>IN</sub>	Input Leakage Current	0 to 5.5			±0.1		±1.0	μΑ	$0 \le V_{IN} \le 5$	5.5V
I <sub>OFF</sub>	Power Off Leakage Current	0.0			1		10	μΑ	V <sub>IN</sub> or V <sub>OL</sub>	<sub>JT</sub> = 5.5V
I <sub>CC</sub>	Quiescent Supply Current	1.65 to 5.5			1.0		10	μΑ	$V_{IN} = 5.5V$	, GND

-50 mA


150°C

### **AC Electrical Characteristics**

Symbol	Parameter	v <sub>cc</sub>		$T_A = +25^{\circ}C$		T <sub>A</sub> = -40°	C to +85°C	Units	Conditions	Fig. No.
C,b01	r urumeter	(V)	Min	Тур	Max	Min	Max	Omis	Conditions	1 ig. ivo.
t <sub>PZL</sub>	Propagation Delay	1.65	1.8	6.6	11.5	1.8	12.6			
		1.8	1.8	5.5	9.5	1.8	10.5		$C_L = 50 pF$	
		$2.5 \pm 0.2$	1.2	3.7	5.8	1.2	6.4	ns	$RU = 500\Omega$	Figures 1, 3
		$3.3 \pm 0.3$	8.0	2.9	4.4	8.0	4.8		$RD=500\Omega$	., 0
		$5.0\pm0.5$	0.5	2.3	3.5	0.5	3.9		$V_I = 2 \times V_{CC}$	
t <sub>PLZ</sub>	Propagation Delay	1.65	1.8	5.5	11.5	1.8	12.6			
		1.8	1.8	4.3	9.5	1.8	10.5		$C_L = 50 pF$	l
		$2.5 \pm 0.2$	1.2	2.8	5.8	1.2	6.4	ns	$RU = 500\Omega$	Figures 1, 3
		$3.3 \pm 0.3$	0.8	2.1	4.4	0.8	4.8		$RD=500\Omega$	., 0
		$5.0\pm0.5$	0.5	1.4	3.5	0.5	3.9		$V_I = 2 \times V_{CC}$	
C <sub>IN</sub>	Input Capacitance	0		2.5				pF		
C <sub>OUT</sub>	Output Capacitance	0		4.0				pF		
C <sub>PD</sub>	Power Dissipation	3.3		3				nE.	(Note 2)	Figure 2
	Capacitance	5.0		4				pF	(Note 3)	Figure 2

Note 3:  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption ( $I_{CCD}$ ) at no output loading and operating at 50% duty cycle. (See Figure 2.)  $C_{PD}$  is related to  $I_{CCD}$  dynamic operating current by the expression:  $I_{CCD} = (C_{PD})(V_{CC})(f_{IN}) + (I_{CC}static)$ .

### **AC Loading and Waveforms**



 $C_L$  includes load and stray capacitance Input PRR = 1.0 MHz;  $t_W = 500 \ \text{ns}$ 

FIGURE 1. AC Test Circuit



 $\begin{aligned} & \text{Input} = \text{AC Waveform; } t_r = t_f = 1.8 \text{ ns;} \\ & \text{PRR} = 10 \text{ MHz; Duty Cycle} = 50\% \end{aligned}$ 

FIGURE 2. I<sub>CCD</sub> Test Circuit

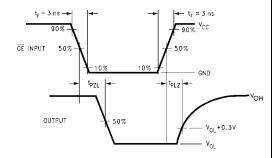



FIGURE 3. AC Waveforms


## **Tape and Reel Specification**


### TAPE FORMAT

Designator         Section         Cavities         Status         Status           Leader (Start End)         125 (typ)         Empty         Sealed           P6         Carrier         250         Filled         Sealed           Trailer (Hub End)         75 (typ)         Empty         Sealed           Leader (Start End)         125 (typ)         Empty         Sealed           P6X         Carrier         3000         Filled         Sealed	., = . •				
Leader (Start End)   125 (typ)   Empty   Sealed	Package	Tape	Tape Number		Cover Tape
P6         Carrier Trailer (Hub End)         250 75 (typ)         Filled Empty         Sealed Sealed           Leader (Start End)         125 (typ)         Empty         Sealed           P6X         Carrier         3000         Filled         Sealed	Designator	Section	Cavities	Status	Status
Trailer (Hub End)         75 (typ)         Empty         Sealed           Leader (Start End)         125 (typ)         Empty         Sealed           P6X         Carrier         3000         Filled         Sealed		Leader (Start End)	125 (typ)	Empty	Sealed
Leader (Start End) 125 (typ) Empty Sealed P6X Carrier 3000 Filled Sealed	P6	Carrier	250	Filled	Sealed
P6X Carrier 3000 Filled Sealed		Trailer (Hub End)	75 (typ)	Empty	Sealed
		Leader (Start End)	125 (typ)	Empty	Sealed
Trailer (Hub End) 75 (typ) Empty Sealed	P6X	Carrier	3000	Filled	Sealed
Tallot (Tab Ella)		Trailer (Hub End)	75 (typ)	Empty	Sealed

### TAPE DIMENSIONS inches (millimeters)

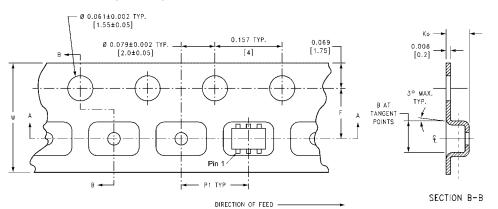

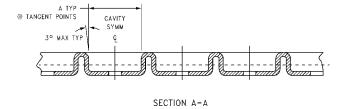




BEND RADIUS NOT TO SCALE

Package	Tape Size	DIM A	DIM B	DIM F	DIM K <sub>o</sub>	DIM P1	DIM W
SC70-6	8 mm	0.093	0.096	$0.138 \pm 0.004$	$0.053 \pm 0.004$	0.157	$0.315 \pm 0.004$
SC70-6	Ollilli	(2.35)	(2.45)	$(3.5 \pm 0.10)$	$(1.35 \pm 0.10)$	(4)	$(8 \pm 0.1)$


## Tape and Reel Specification (Continued)

REEL DIMENSIONS inches (millimeters)

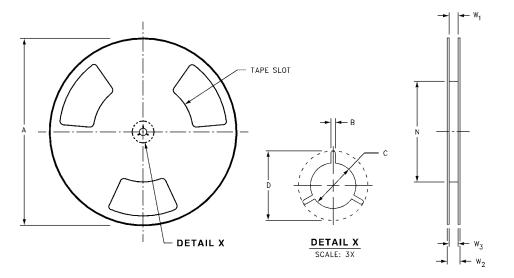

Tape Size	Α	В	С	D	N	W1	W2	W3
0	7.0	0.059	0.512	0.795	2.165	0.331 + 0.059/-0.000	0.567	W1 + 0.078/-0.039
8 mm	(177.8)	(1.50)	(13.00)	(20.20)	(55.00)	(8.40 + 1.50/-0.00)	(14.40)	(W1 + 2.00/-1.00)

### Physical Dimensions inches (millimeters) unless otherwise noted

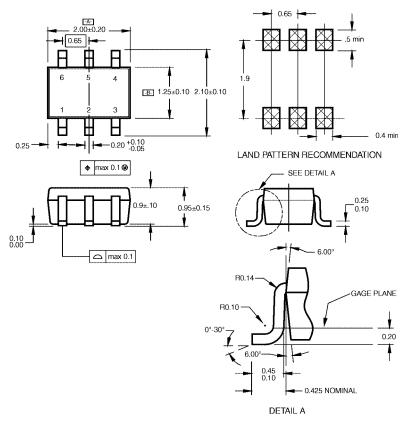

### NOTES:

- A. CONFORMS TO EIAJ REGISTERED OUTLINE DRAWING SC88.
- B. DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH.
- C. DIMENSIONS ARE IN MILLIMETERS.

MAA06ARevC

6-Lead SC70, EIAJ SC88, 1.25mm Wide Package Number MAA06A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com