

# ROTATING BEACONS

Luci Rotanti

Feux Tournants



Rundumkennleuchten

Luces Rotativas

## ROTATING BEACONS

| Code No:  | Voltage:   | Light Source: | Current: |
|-----------|------------|---------------|----------|
| R201-13   | 12v Dc --- | H1 x 55w      | 4.70 A   |
| R201-14   | 24v Dc --- | H1 x 70w      | 3.00 A   |
| R201-29 • | 24v Dc --- | Ba 15s x 10w  | 0.60 A   |
| R201-60   | 12v Dc --- | Ba15d x 21w   | 1.85 A   |
| R201-61 • | 24v Dc --- | Ba15d x 21w   | 0.95 A   |
| R201-62   | 12v Dc --- | Ba15d x 48w   | 4.00 A   |
| R201-63   | 24v Dc --- | Ba15d x 48w   | 2.00 A   |
| R201-64   | 48v Dc --- | Ba15d x 25w   | 0.60 A   |
| R200-03   | 24v Ac ~   | Ba15d x 48w   | 2.00 A   |
| R200-02   | 48v Ac ~   | Ba15d x 25w   | 0.55 A   |
| R200-04   | 115v Ac ~  | Ba15d x 60w   | 0.55 A   |
| R200-05   | 230v Ac ~  | Ba15d x 60w   | 0.29 A   |

• diode polarised

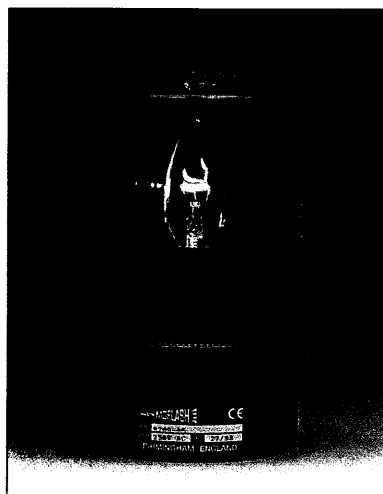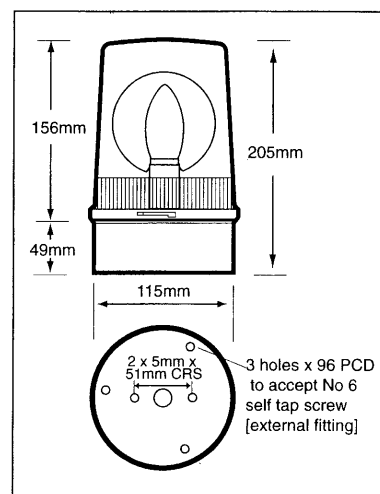

01



04

05

°C -10+66

IP 65

50/60 Hz


Kg 0.83

r.p.m. 160±30DC

r.p.m. 120AC

## ROTATING AUDIBLE BEACONS

| Code No: | Voltage:   | Light Source: | Current: |
|----------|------------|---------------|----------|
| RA201-20 | 12v Dc --- | H1 x 55w      | 4.70 A   |
| RA201-21 | 24v Dc --- | H1 x 70w      | 3.00 A   |
| RA200-03 | 24v Ac ~   | Ba15d x 48w   | 2.00 A   |
| RA200-02 | 48v Ac ~   | Ba15d x 25w   | 0.55 A   |
| RA200-24 | 115v Ac ~  | Ba15d x 60w   | 0.55 A   |
| RA200-25 | 230v Ac ~  | Ba15d x 60w   | 0.29 A   |

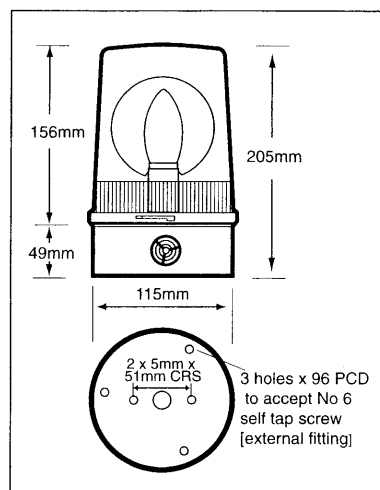

01



04

05

°C -10+66

IP 65

50/60 Hz

Kg 0.86



r.p.m. 160±30DC

r.p.m. 120AC

dB 95

## ROTATING BEACONS

| Code No: | Voltage:   | Light Source: | Current: |
|----------|------------|---------------|----------|
| R301-13  | 12v Dc --- | H1 x 55w      | 4.70 A   |
| R301-14  | 24v Dc --- | H1 x 70w      | 3.00 A   |
| R301-60  | 12v Dc --- | Ba15d x 21w   | 1.85 A   |
| R301-61  | 24v Dc --- | Ba15d x 21w   | 0.95 A   |
| R301-62  | 12v Dc --- | Ba15d x 48w   | 4.00 A   |
| R301-63  | 24v Dc --- | Ba15d x 48w   | 2.00 A   |
| R301-64  | 48v Dc --- | Ba15d x 25w   | 0.60 A   |
| R300-03  | 24v Ac ~   | Ba15d x 48w   | 2.00 A   |
| R300-02  | 48v Ac ~   | Ba15d x 25w   | 0.55 A   |
| R300-04  | 115v Ac ~  | E14 x 40w     | 0.38 A   |
| R300-05  | 230v Ac ~  | E14 x 40w     | 0.20 A   |

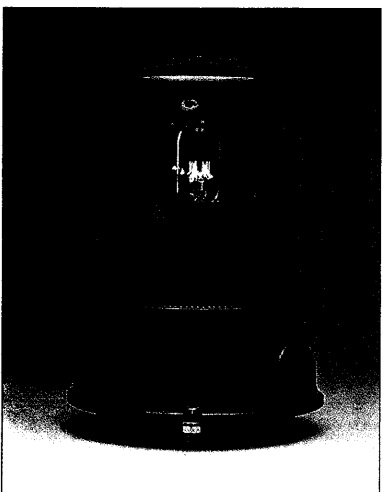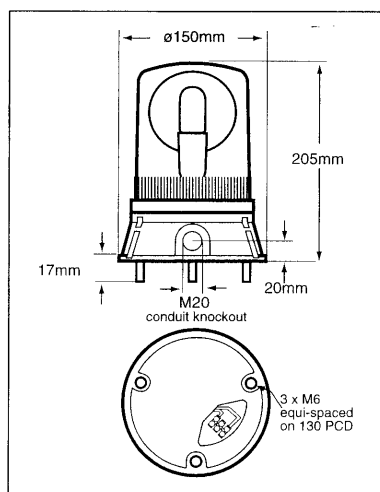

01



04

05

°C -10+66

IP 65

50/60 Hz

Kg 0.98

r.p.m. 160±30DC

r.p.m. 120AC