




Product Features

- · Near-zero propagation delay
- 5 Ohm switches connect inputs to outputs
- Direct bus connection when switches are ON
- Ultra-low quiescent power (0.2mA typical)
 - Ideally suited for notebook applications
- Industrial operating temperature: -40°C to +85°C
- · Packages available:
 - -56-pin 240-mil wide thin plastic TSSOP (A)
 - -56-pin 300-mil wide plastic SSOP (V)

Logic Block Diagram

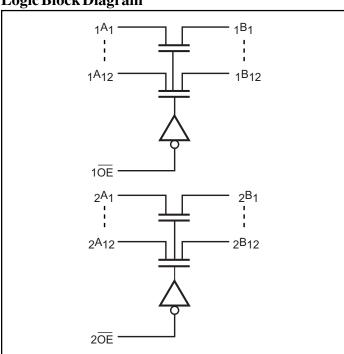

Truth Table

1 OE	2OE	1A, 1B I/Os	2A, 2B I/Os
L	L	$_{1}A = {_{1}B}$	$_2A = _2B$
L	Н	$_{1}A = {_{1}B}$	Z
Н	L	Z	2A = 2B
Н	Н	Z	Z

Note: 1. H = High Voltage LevelL = Low Voltage Level

Z = High Impedance

Product Description

Pericom Semiconductor's PI3C series of bus switch circuits are produced using the Company's advanced submicron CMOS technology.

3.3V, High Bandwidth 24-Bit Bus Switch

The PI3C16211 is a 24-bit bus switch designed with a low ON resistance allowing inputs to be connected directly to outputs. This device operates as a 24-bit or a 12-bit bus switch, which provides high speed bus switching.

Product Pin Configuration

NC [1A1 [1A2 [1 2 3		56 10E 55 20E 54 1B1
1A3	4 5 6 7		53
GND	8 9 10 11 12 13 14 15 16 17	56-Pin A,V	49 GND 48 1B6 47 1B7 46 1B8 45 1B9 44 1B10 43 1B11 42 1B12 41 2B1 40 2B2
2A3	18 19 20 21 22 23 24 25 26 27 28		39

Product Pin Description

Pin Name	I/O	Description	
S0-S2	I	Select Inputs	
xAx	I/O	Bus A	
xBx	I/O	Bus B	



Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Store as Tomorotore	65°C to 1150°C
Storage Temperature	03 C to +130 C
Ambient Temperature with Power Applied	40°C to +85°C
Supply Voltage to Ground Potential (Inputs & V _{CC} Only)	0.5V to +4.6V
Supply Voltage to Ground Potential (Outputs & D/O Only)	0.5Vto+4.6V
DCI/O Voltage	0.5Vto+5.5V
DC Output Current	120mA
Power Dissipation	0.5W

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

DC Electrical Characteristics (Over the Operating Range, $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, $V_{CC} = 3.3\text{V} \pm 10\%$)

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ. (2)	Max.	Units
$ m V_{IH}$	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0	_		V
V_{IL}	Input LOW Voltage	Guaranteed Logic LOW Level	-0.5	_	0.8	V
${ m I}_{ m IH}$	Input HIGH Current	$V_{CC} = Max., V_{IN} = V_{CC}$	_	_	±1	
I_{IL}	Input LOW Current	$V_{CC} = Max., V_{IN} = GND$	_	_	±1	μΑ
$I_{OZ}^{(3)}$	High-Impedence Output Current	$0 \le A, B \le V_{CC}$	_	_	±1	
V_{IK}	Clamp diode Voltage	V_{CC} = Min., I_{IN} = -18 mA	_	-0.73	-1.2	V
D	Switch On Registered(4)	$V_{\rm CC} = {\rm Min., V_{\rm IN}} = 0.0 {\rm V}$ $I_{\rm ON} = 48 {\rm mA}$ or $64 {\rm mA}$	_	6.5	8.5	Ω
$R_{ m ON}$	Switch On Resistance ⁽⁴⁾	$V_{\rm CC} = {\rm Min., V_{\rm IN}} = 2.4 {\rm V}$ $I_{\rm ON} = 15 {\rm mA}$	_	10	15	52

Capacitance ($T_A = 25^{\circ}C f = 1 MHz$)

Parameters (5)	Description	Test Conditions	Тур.	Units
C_{IN}	Input Capacitance		3.5	
C _{OFF}	A/B Capacitance, Switch Off $V_{IN} = 0V$		4.0	pF
Con	A/B Capacitance, Switch On		8.0	

Notes:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- 2. Typical values are at $V_{CC} = 3.3V$, $T_A = 25^{\circ}C$ ambient and maximum loading.
- 3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- 4. Measured by the voltage drop between A and B pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (A,B) pins.
- 5. This parameter is determined by device characterization but is not production tested.



Power Supply Characteristics

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ. (2)	Max.	Units
I _{CC}	Quiescent Power Supply Current	$V_{CC} = Max.$ $V_{IN} = GND \text{ or } V_{CC}$		260	850	μA
DICC	Supply Current per Input @ TTL HIGH	$V_{CC} = Max.$ $V_{IN} = 3.0V^{(3)}$			750	

Notes:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
- 2. Typical values are at $V_{CC} = 3.3V$, $+25^{\circ}C$ ambient.
- 3. Per TTL driven input (control inputs only); A and B pins do not contribute to ICC.

PI3C16211 Switching Characteristics Over Operating Range


			PI3C16211		
			Com		
Parameters	Description	Conditions ⁽¹⁾	Min.	Max.	Units
t _{PLH} t _{PHL}	Propagation Delay ^(2,3) Ax to Bx, Bx to Ax	$C_{L} = 50 pF$ $R_{L} = 500 \Omega$	_	0.25	
t _{PZH} t _{PZL}	Bus Enable Time nOE to A _X or B _X	$C_L = 50 pF$	1.5	6.5	ns
t _{PHZ} t _{PLZ}	Bus Disable Time nOE to A _X or B _X	$R_{L} = 500\Omega$ $R = 500\Omega$	1.5	5.5	

Notes:


- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.
- 3. The bus switch contributes no propagational delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for 50pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.



56-Pin TSSOP (A) Package

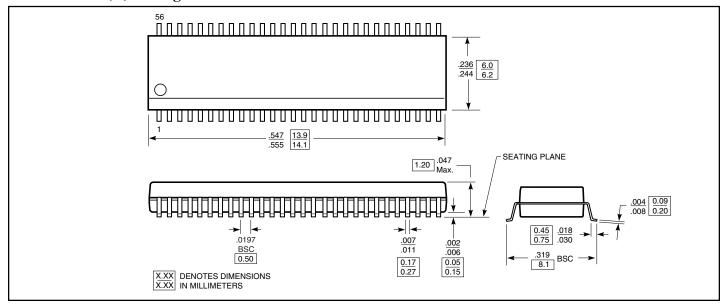

56-Pin SSOP (V) Package

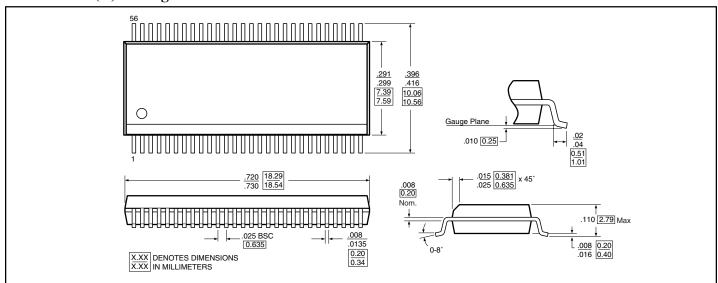

Ordering Information

Part	Pin - Package	Width	Temperature
PI3C16211A	56 - TSSOP (A)	240-mil	0°C to 85°C
PI3C16211V	56 - SSOP (V)	300-mil	0 C to 83 C

Applications Information

Logic Inputs

The logic control inputs can be driven up to +3.6V regardless of the supply voltage. For example, given a +3.3V supply, IN may be driven low to 0V and high to 3.6V. Driving IN Rail-to-Rail minimizes power consumption.

Power-Supply Sequencing

Proper power-supply sequencing is recommended for all CMOS devices. Always apply V_{CC} before applying V_{BIAS} and signals to input/output or control pins.

Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd

Pericom Semiconductor Corporation

2380 Bering Drive • San Jose, CA 95131 • 1-800-435-2336 • Fax (408) 435-1100 • http://www.pericom.com

PS8456C 05/29/01